


PRACTICALS

Computer Networks Laboratory

Practical 1.

Aim: To implement the LAN network using switch in packet tracer simulator

Step 1: Open Cisco packet tracer 5.1 as shown in **FIG 1**

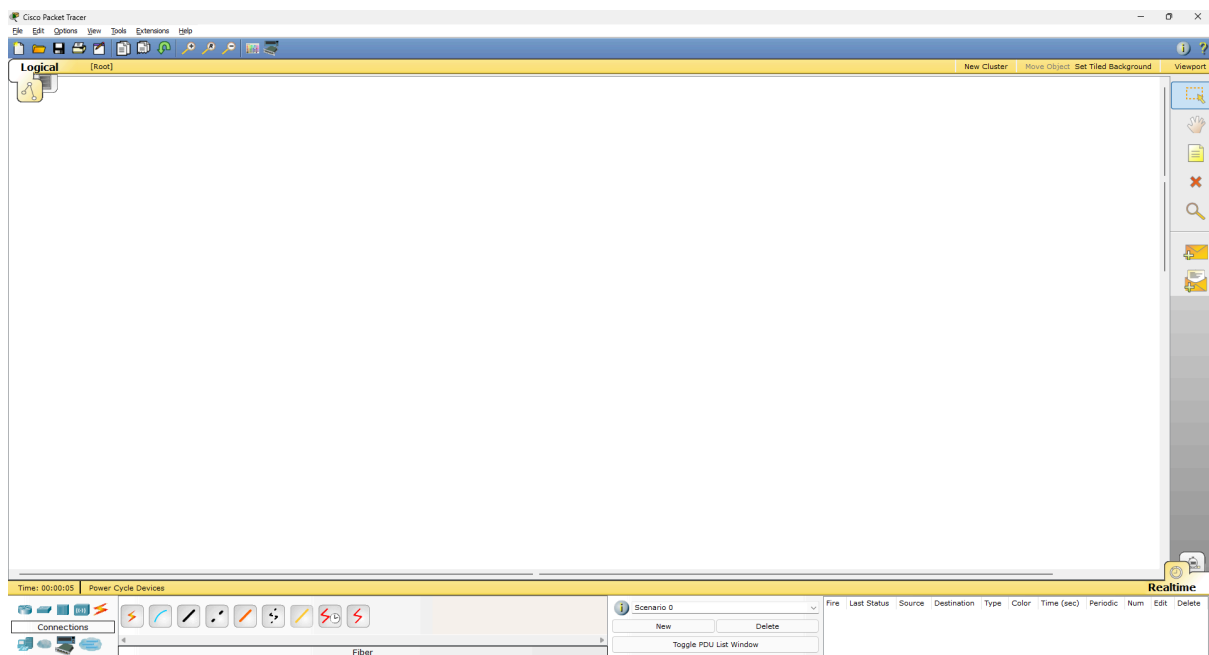


[FIG 1]

Step 2: Select device to make LAN (Local Area Network) Network form the bottom Tool bar as shown in **FIG 2**

There are multiple devices used in this process are follows as:

1. Network Switch
2. Router
3. Hub
4. Wireless device
5. Cables/wires (for connection)
6. End devices (PC, Laptop, Server etc)
7. WAN Emulation
8. Custom made device
9. Multi User connection

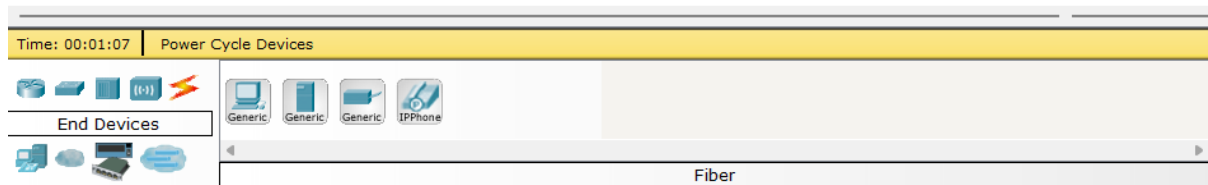

[FIG 2]

Step 3: Select PCs, Network Switch, & connecting wires/Cables Shown in **FIG 3**

1. 3 - PCs
2. 1 - Network Switch
3. 3 - Connecting wires/ cables

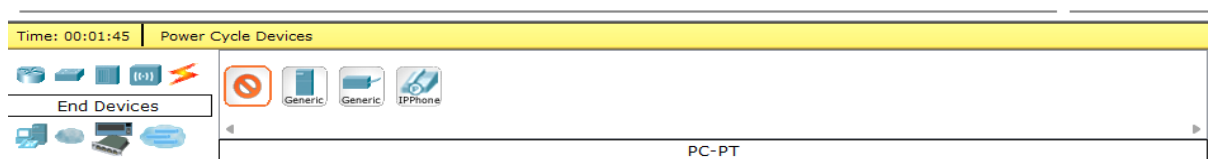


FIG 3

Step 4: Creating Network (Topology) Using selected devices as shown in FIG 4

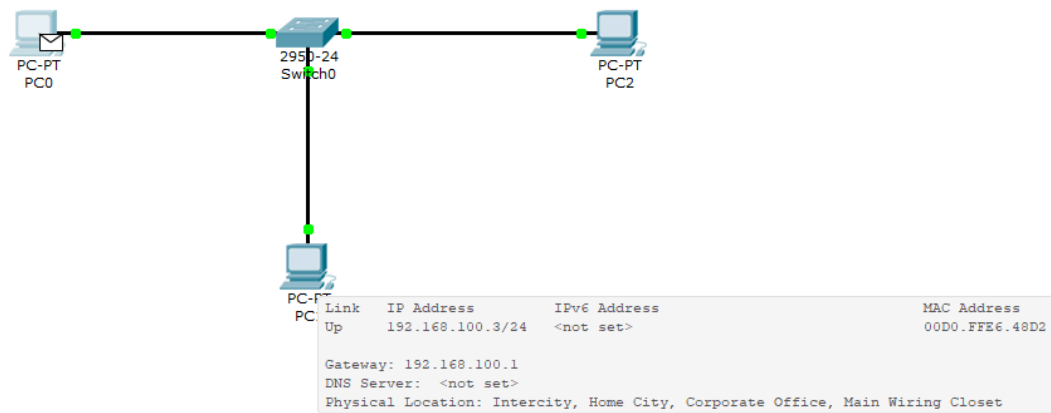


FIG 4

Step 5: Configuring The Setup with Network (static method) Using Default Gateway, Subnet Mask, Ip Address as shown in FIG 5 and FIG 6

1. Click on PC
2. Go to Desktop Tab
3. Click on Ip Configuration

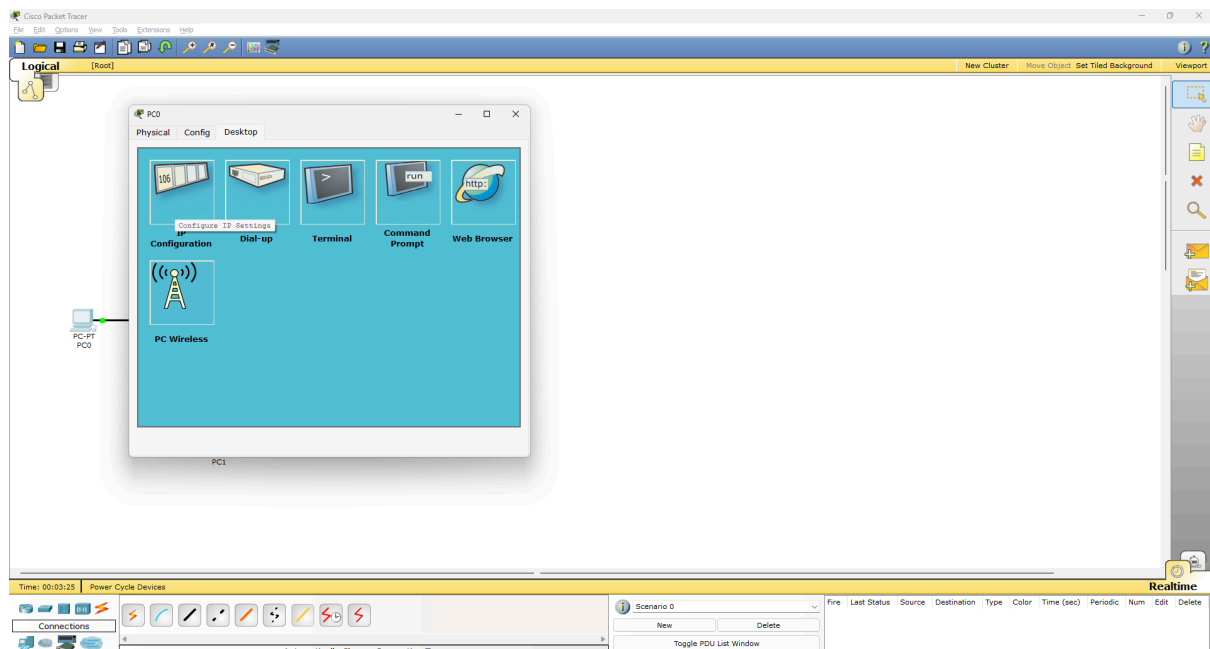


FIG 5

1. Select Or click on Static
2. Enter values as follows
3. Close the dialog box
4. Do the same process for all of the PCs

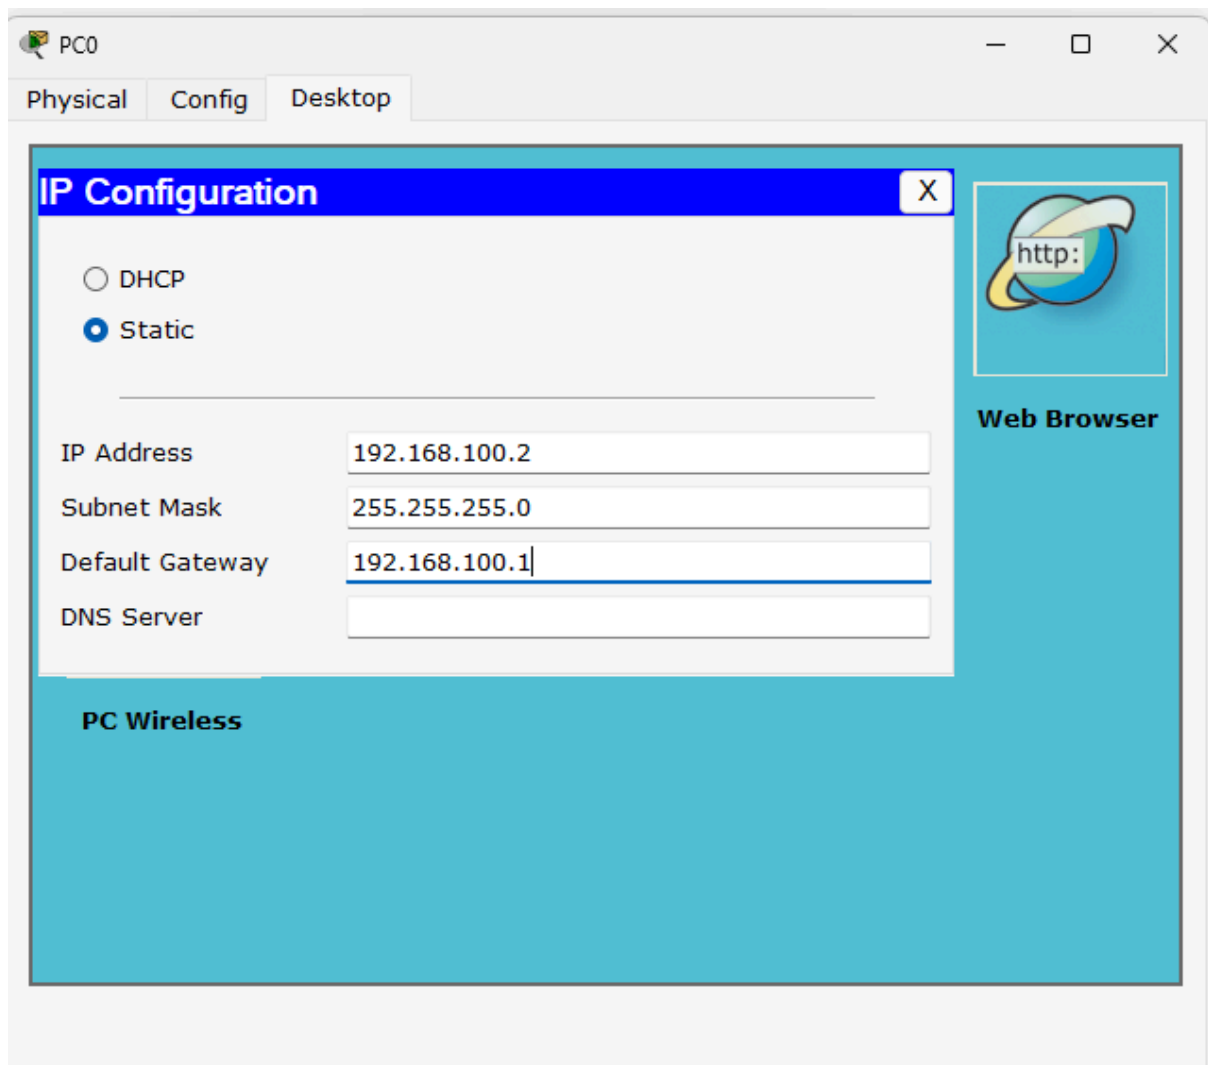


FIG 6

Step 6: Go to Right-Sid-Toolbar and select Packet option and put it on Source Pc then Destination PC in Network as shown in **FIG 7**

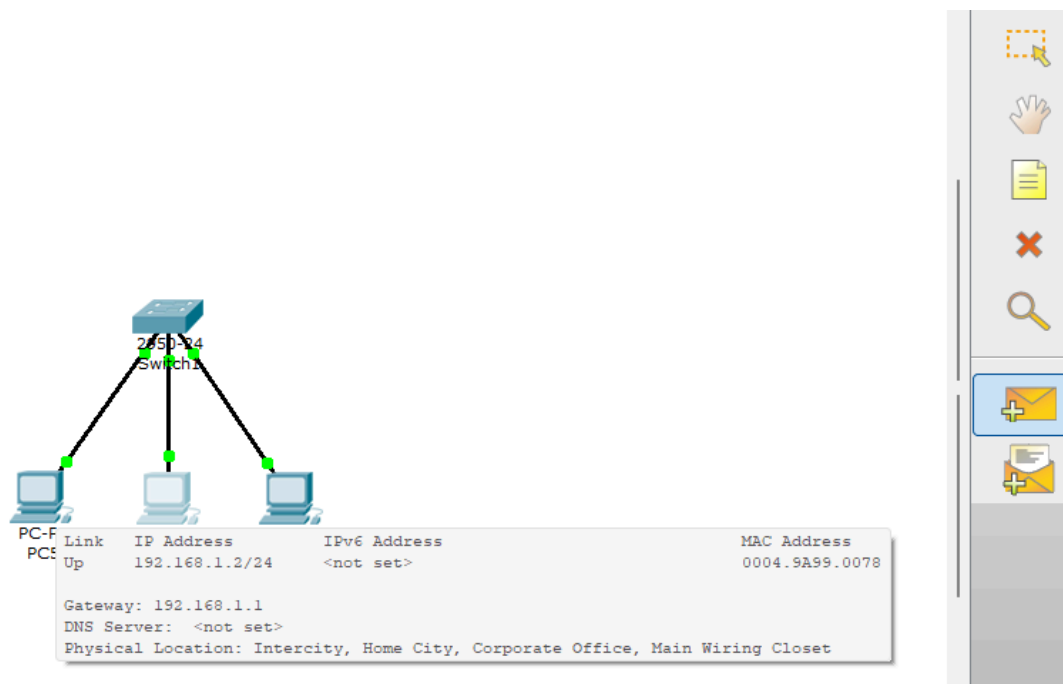


FIG 7

Step 7: After compilation of step 6 in the bottom Tool bar's right side we can check the status of sending packets that it's successfully Send or Failed Shown in **FIG 8.1** For Success and **FIG 8.2** For Failed

Realtime										
Fire	Last Status	Source	Destination	Type	Color	Time (sec)	Periodic	Num	Edit	Delete
	Successful	PC0	PC1	ICMP		0.000	N	0	(edit)	(delete)

FIG 8.1

Realtime										
Fire	Last Status	Source	Destination	Type	Color	Time (sec)	Periodic	Num	Edit	Delete
	Failed	PC5	PC6	ICMP		0.000	N	0	(edit)	(delete)

FIG 8.2