
Practical 4.

Aim: To Implement a various topology

Step 1: Open Cisco packet tracer 5.1 as shown in **FIG 1**

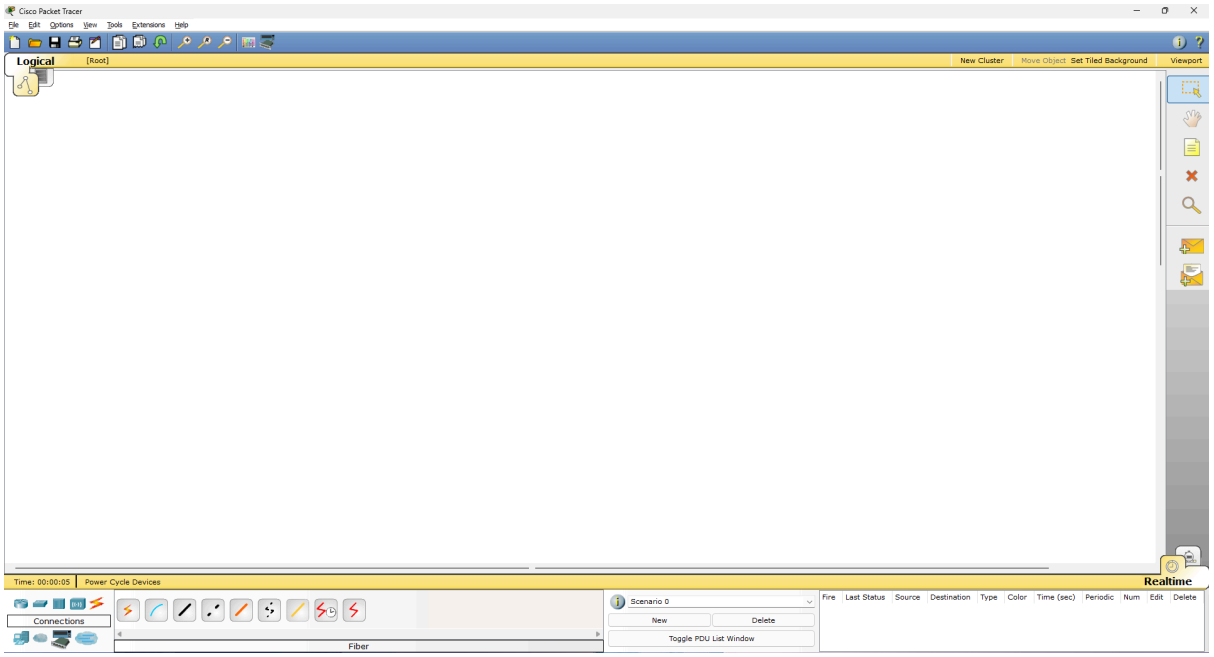


[FIG 1]

Step 2: First we will Understand how to build Topology then we will create various topologies. Select device to make LAN (Local Area Network) Network form the bottom Tool bar as shown in **FIG 2**

There are multiple devices used in this process are follows as:

1. Network Switch
2. Router
3. Hub
4. Wireless device
5. Cables/wires (for connection)
6. End devices (PC, Laptop, Server etc)
7. WAN Enulation
8. Custom made device
9. Multi User connection

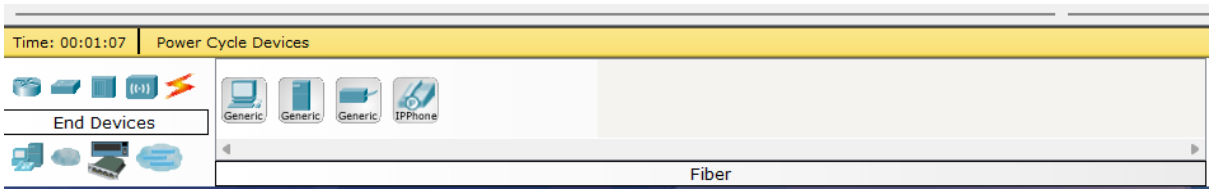

[FIG 2]

Step 3: Select PCs, Network Switch, & connecting wires/Cables Shown in **FIG 3**

1. 3 - PCs
2. 1 - Network Switch
3. 3 - Connecting wires/ cables



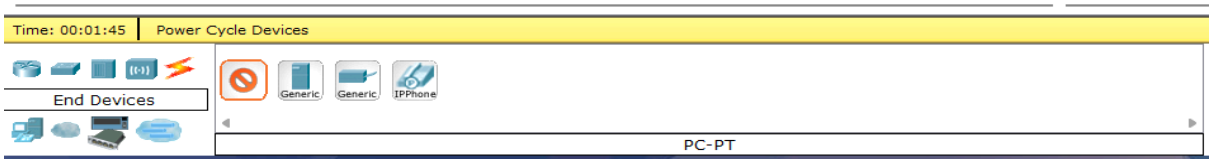


FIG 3

Step 4: Creating Network (Topology) Using selected devices as shown in **FIG 4**

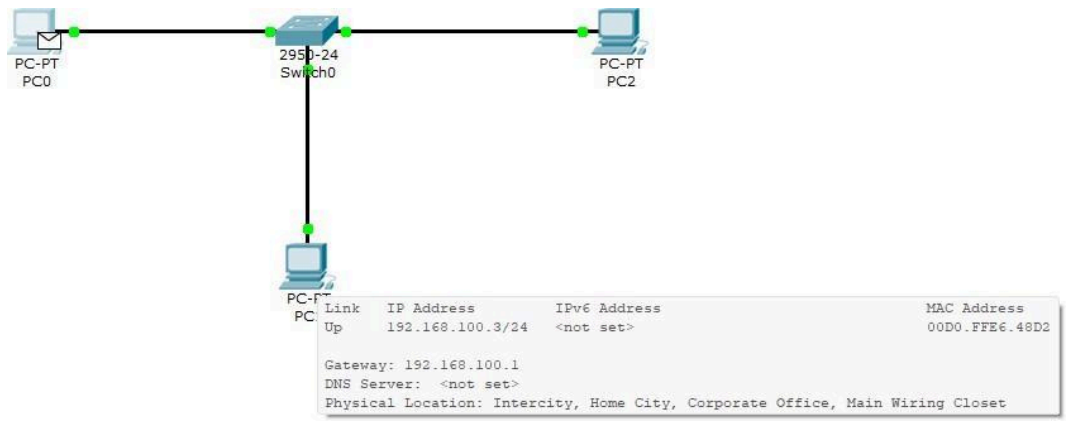


FIG 4

Step 5: Configuring The Setup with Network (static method) Using Default Gateway, Subnet Mask, Ip Address as shown in **FIG 5** and **FIG 6**

1. Click on PC
2. Go to Desktop Tab
3. Click on Ip Configuration

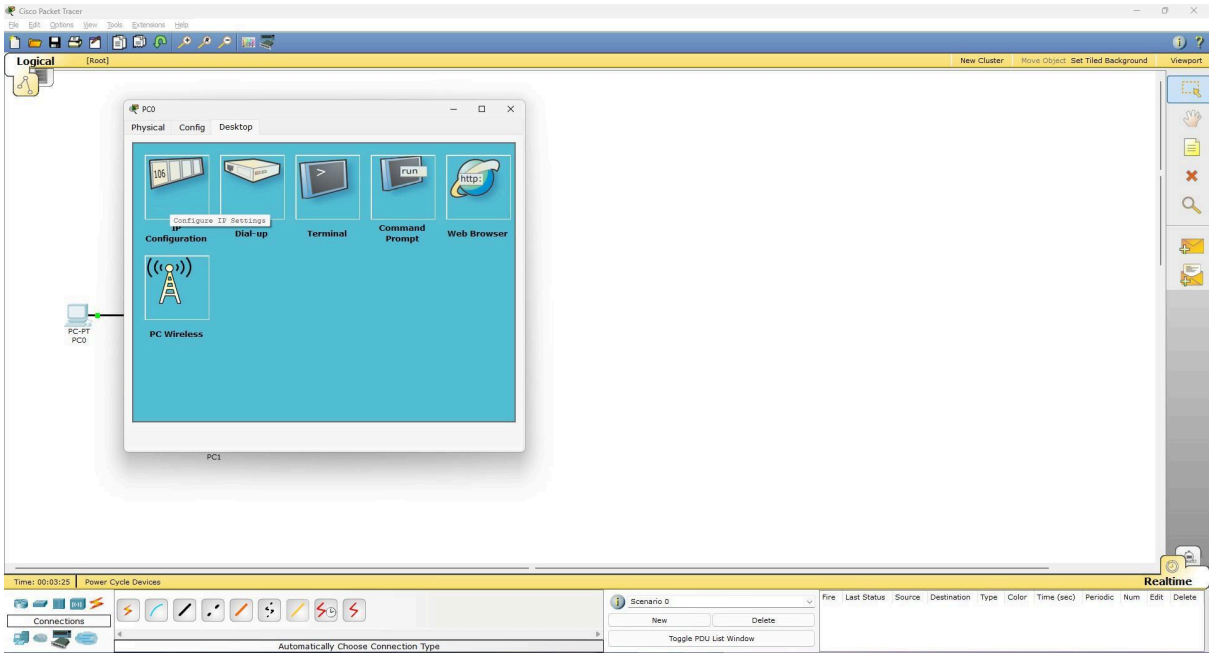


FIG 5

1. Select Or click on Static
2. Enter values as follows
3. Close the dialog box
4. Do the same process for all of the PCs

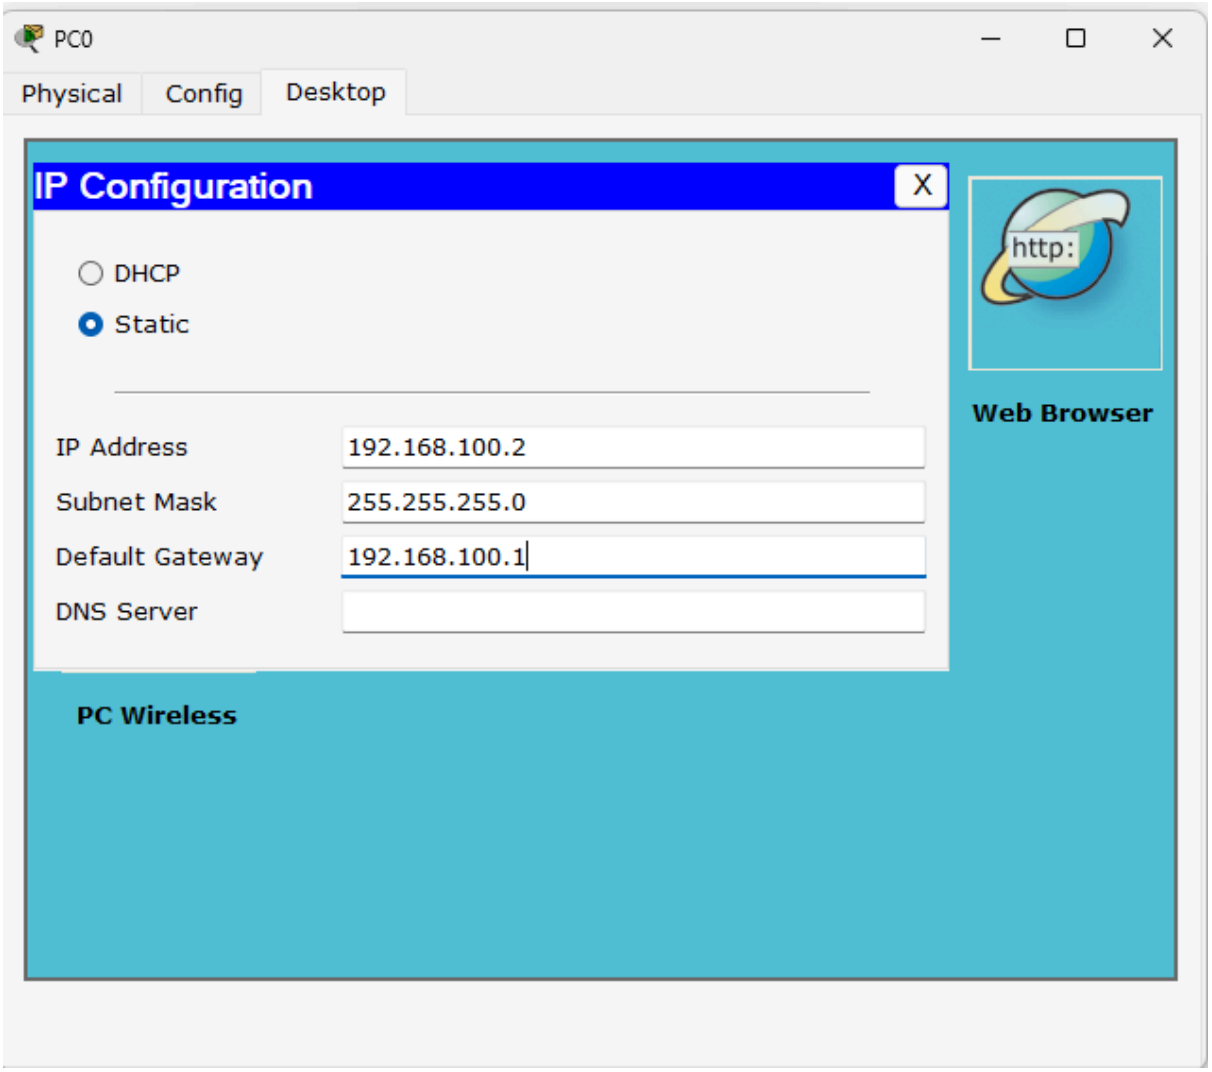


FIG 6

Step 6: Go to Right-Sid-Toolbar and select Packet option and put it on Source Pc then Destination PC in Network as shown in **FIG 7**

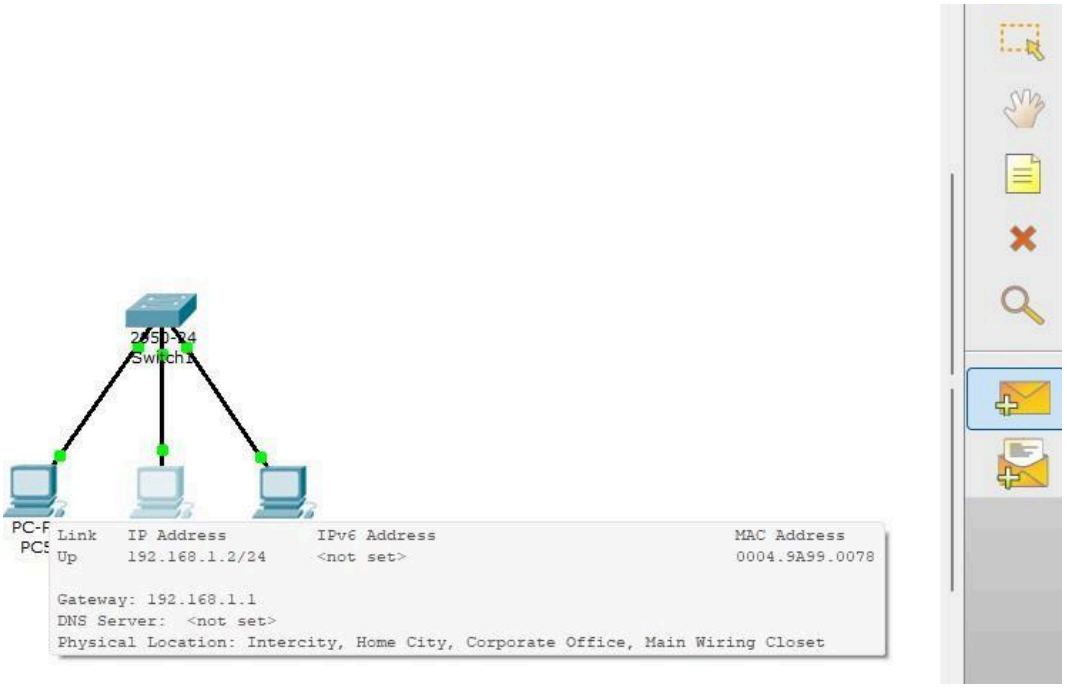


FIG 7

Step 7: After compilation of step 6 in the bottom Tool bar's right side we can check the status of sending packets that it's successfully Send or Failed Shown in **FIG 8.1** For Success and **FIG 8.2** For Failed

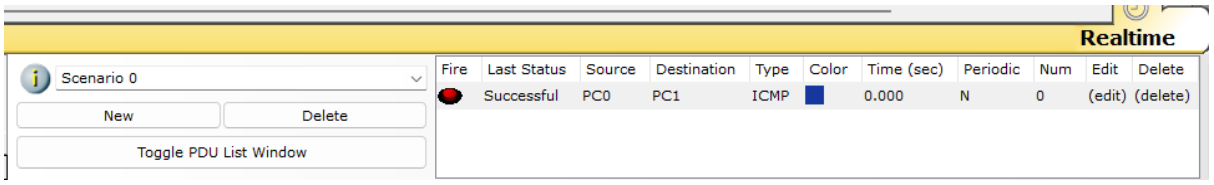


FIG 8.1


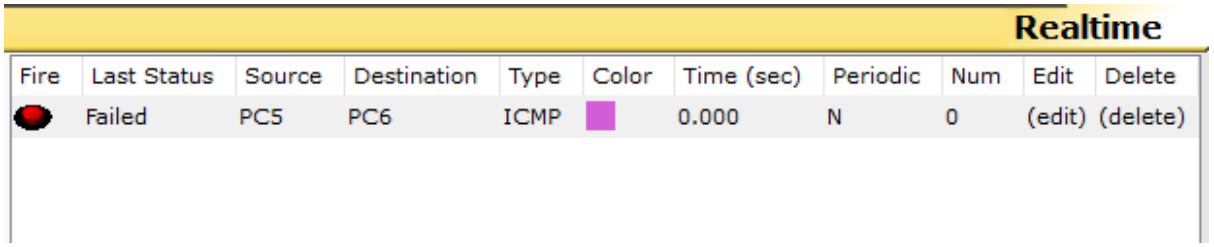


FIG 8.2


Step 7: To Implement Different Types of Topology

1. Star Topology
2. Bus Topology
3. Ring Topology
4. Mesh Topology
5. Hybrid Topology


For Star Topology

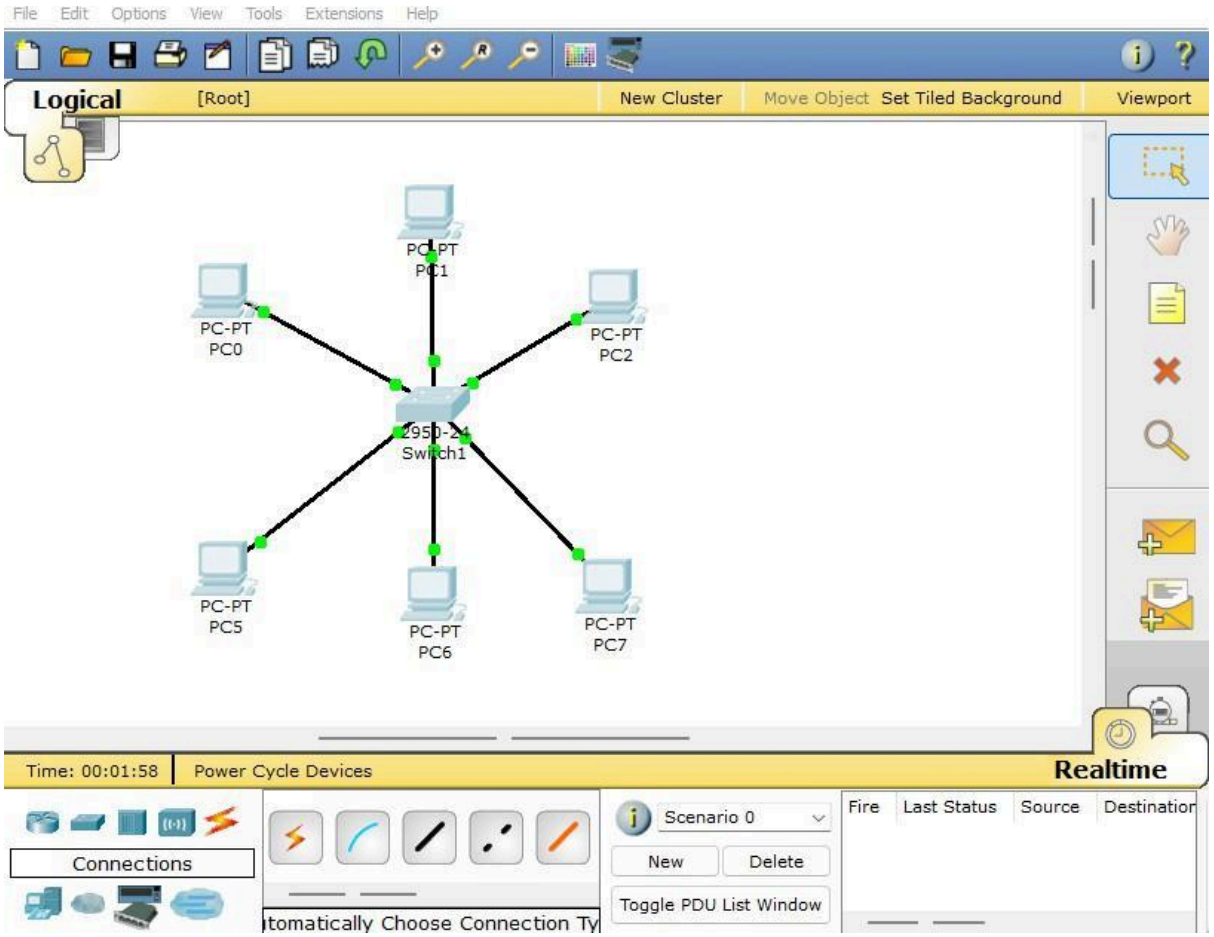


For Bus Topology

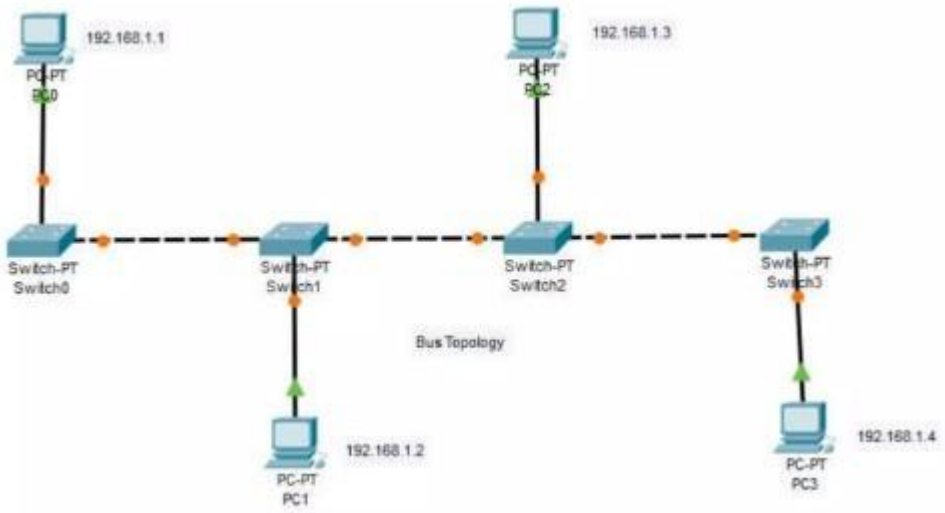

For Ring Topology

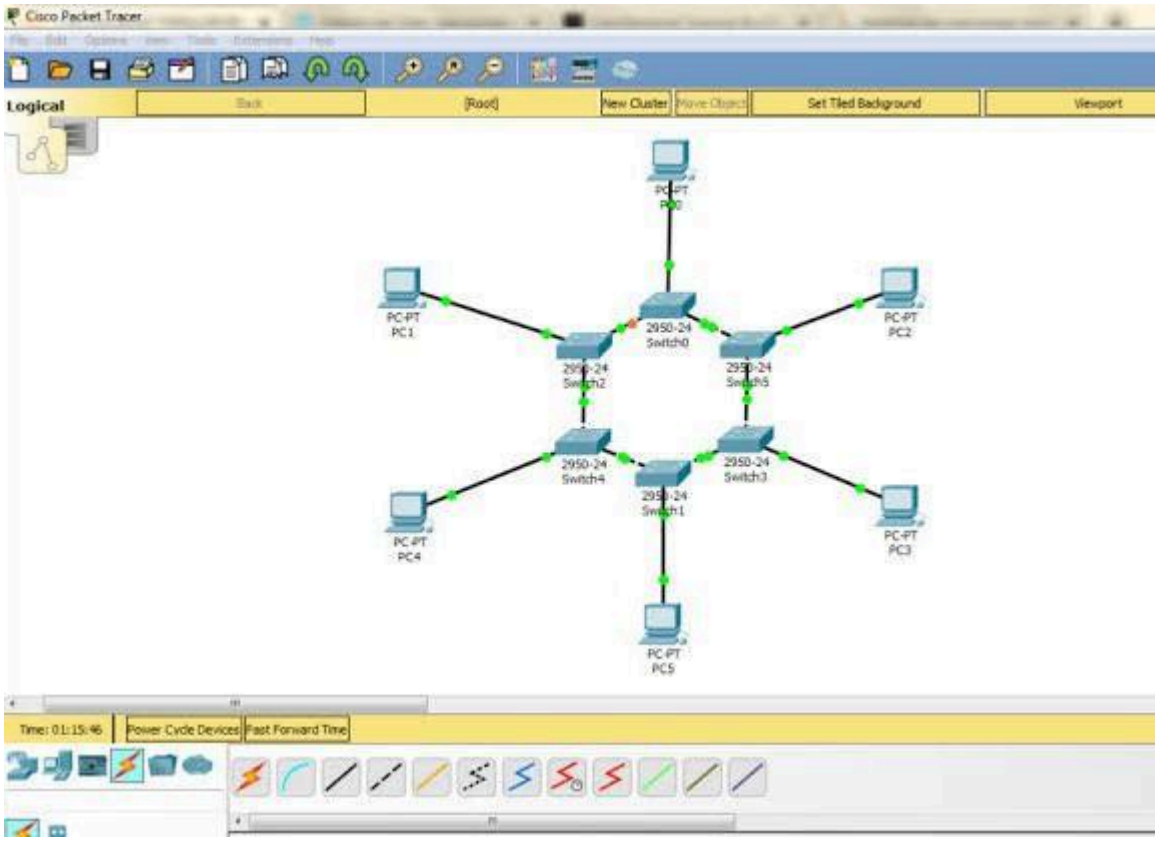

For Mesh Topology

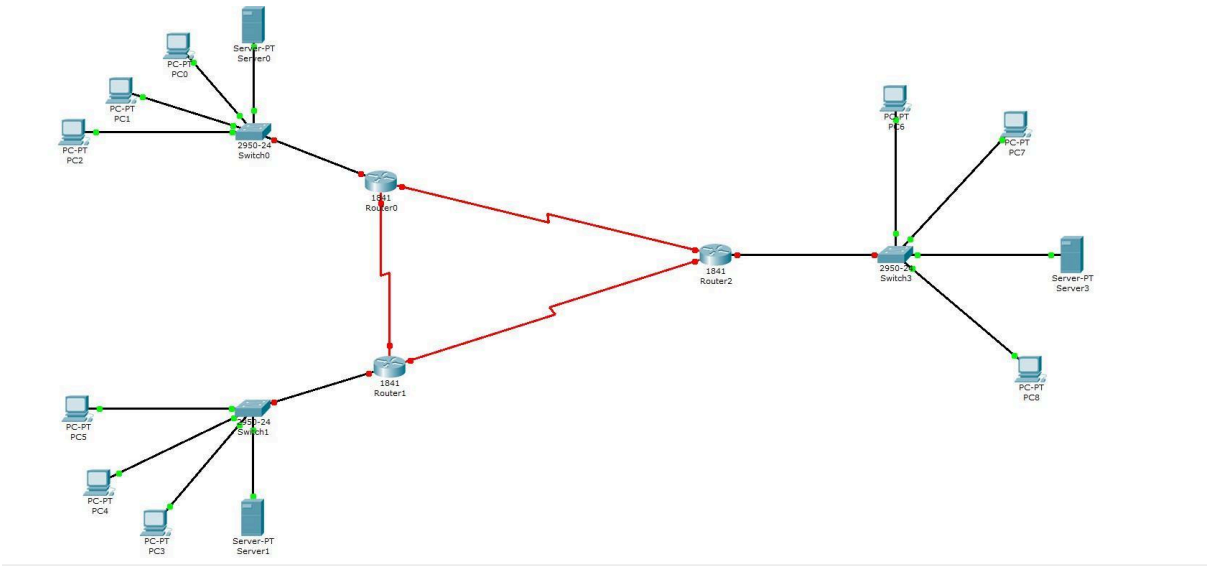

For Hybrid Topology

