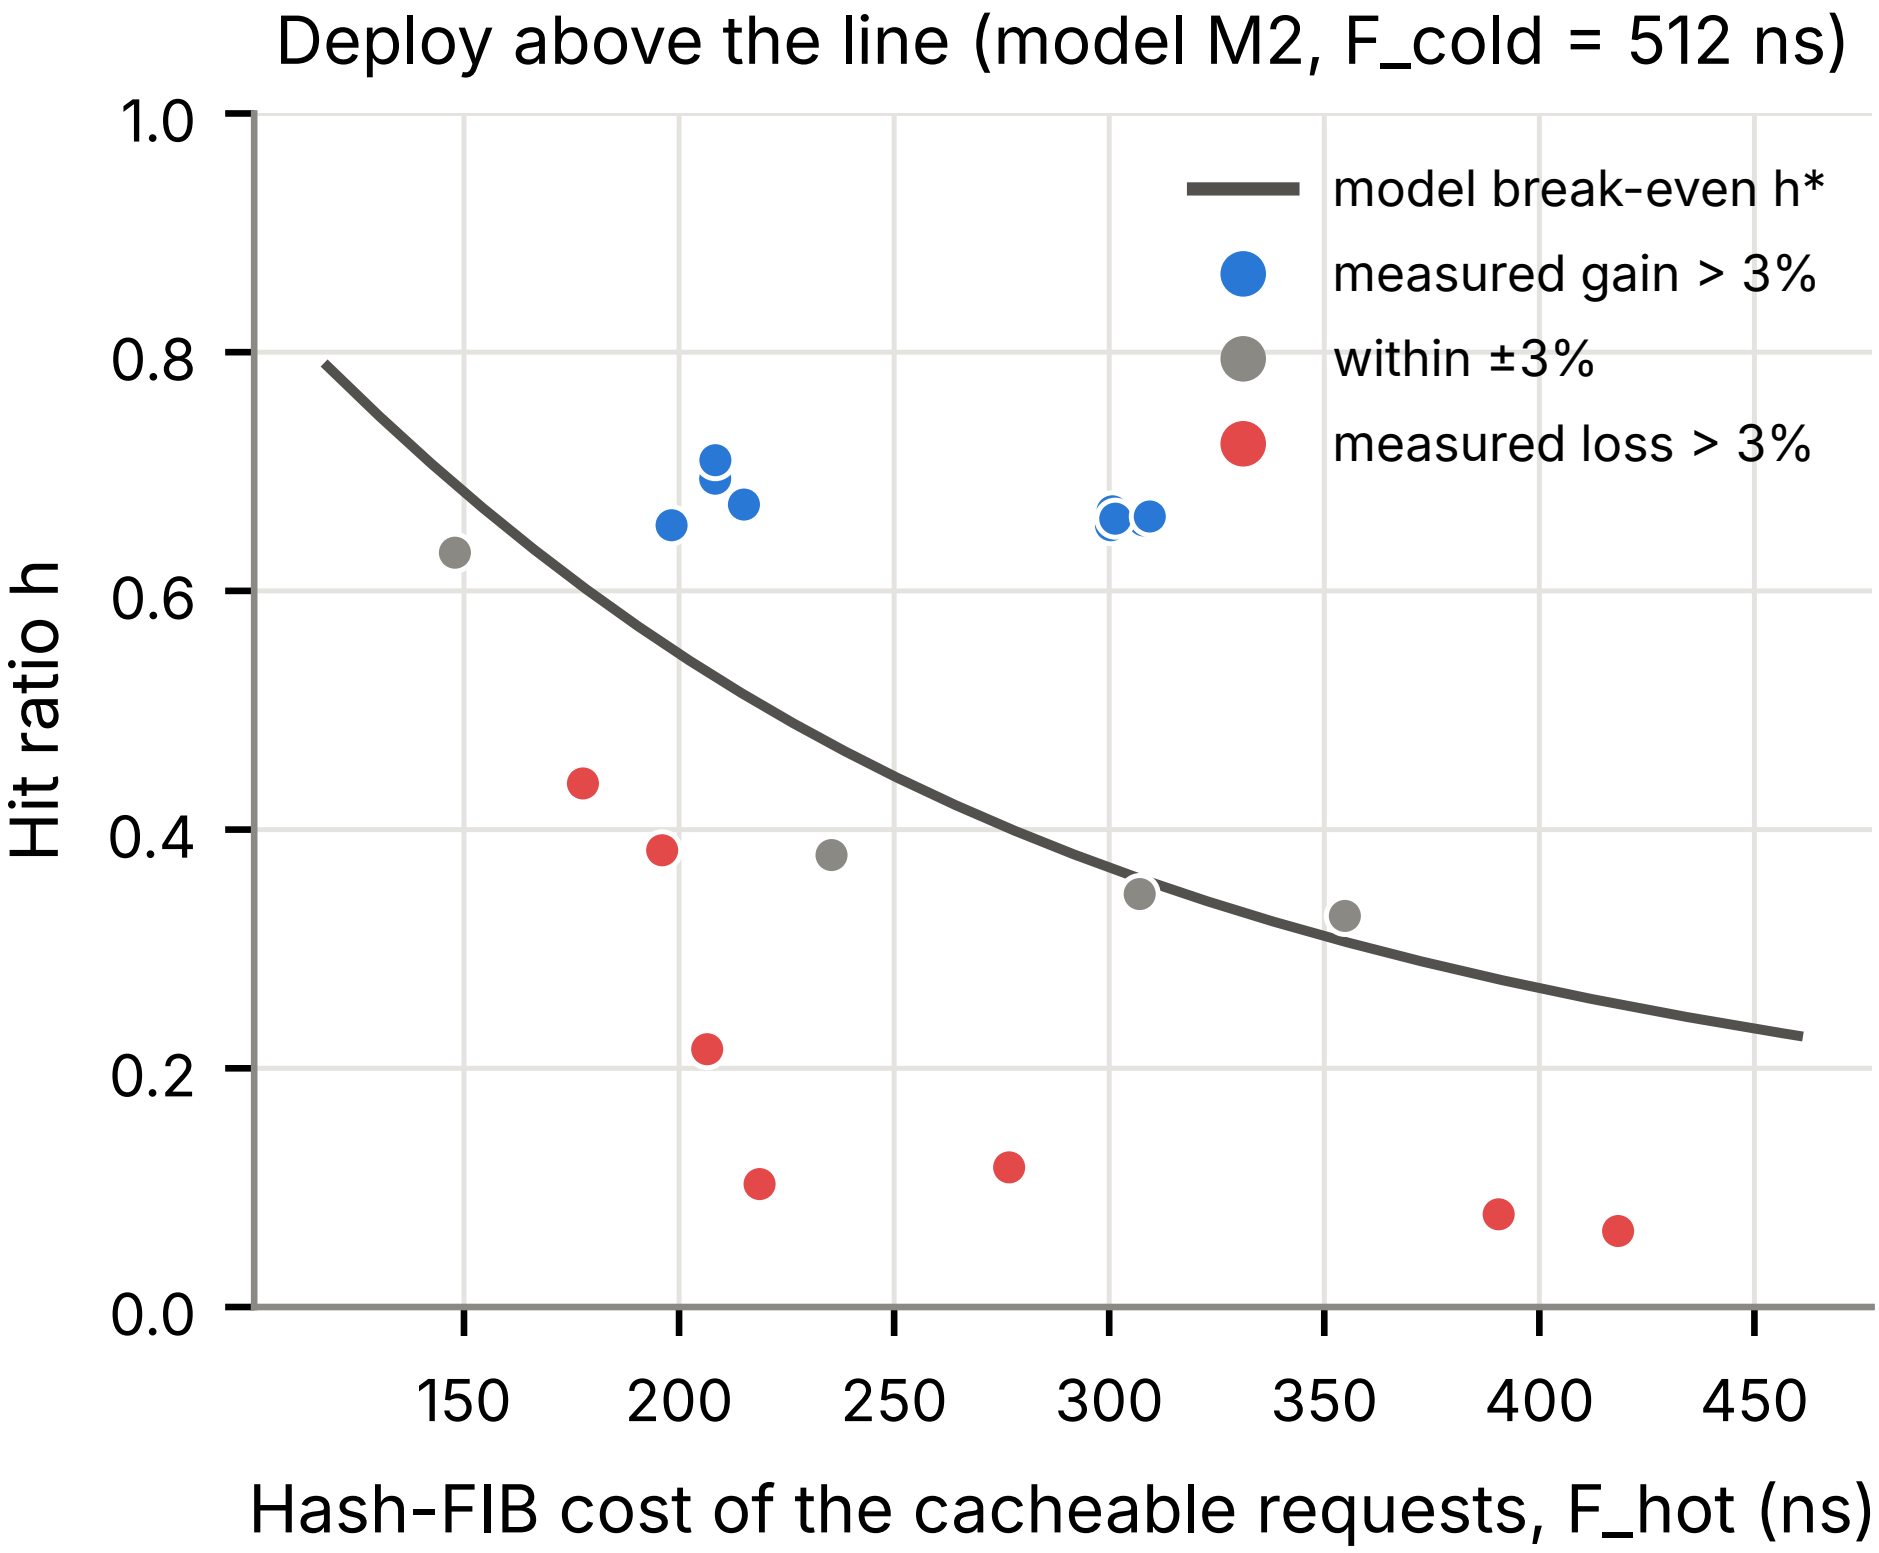
Deploy above the line (model M2, F_cold = 512 ns)
model break-even h*
measured gain > 3%
within ±3%
measured loss > 3%
Hit ratio h
1.0
0.8
0.6
0.4
0.2
0.0
150
200
250
300
350
400
450
Hash-FIB cost of the cacheable requests, F_hot (ns)