Choosing LED colour temperature and colour rendering for UAE interiors

Let the finishes decide

In a Dubai boutique, two nominally 3000 K spotlights can make the same burgundy fabric look different because their spectral output differs.



Let the finishes decide

Use correlated colour temperature to shortlist the appearance of white light, then ask for colour-rendering data at the exact output and CCT offered.



Choosing LED colour temperature and colour rendering for UAE interiors


Let the finishes decide

For skin tones, timber and saturated reds, examine the supplier’s R9 and TM-30 information alongside the general CRI figure and verify the effect on real samples.



Specify colour across adjacent fittings

On a long Abu Dhabi hotel corridor, request chromaticity consistency in SDCM steps for the selected LED package and inspect adjacent wall scallops for visible tint shifts.

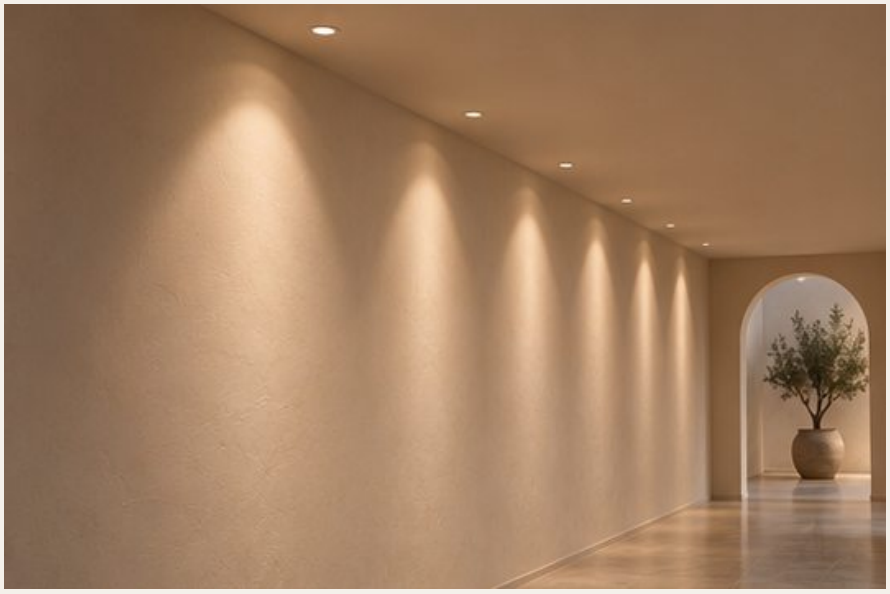

Choosing LED colour temperature and colour rendering for UAE interiors

Specify colour across adjacent fittings

A fixed-white engine keeps one nominal CCT through dimming, while a dim-to-warm engine follows a product-specific curve that can bring amber tones into a dining scene.



Specify colour across adjacent fittings

Tunable-white gear gives the operator a separate colour adjustment, so record both output and CCT for each scene the owner will recall.



Choosing LED colour temperature and colour rendering for UAE interiors

Set an acceptance sample

Compare candidate fittings at matched illuminance on the same stone slab so extra brightness does not win the colour decision.



Set an acceptance sample

Retain the approved sample, driver setting and finish board for the contractor to compare with subsequent batches and future replacements.

