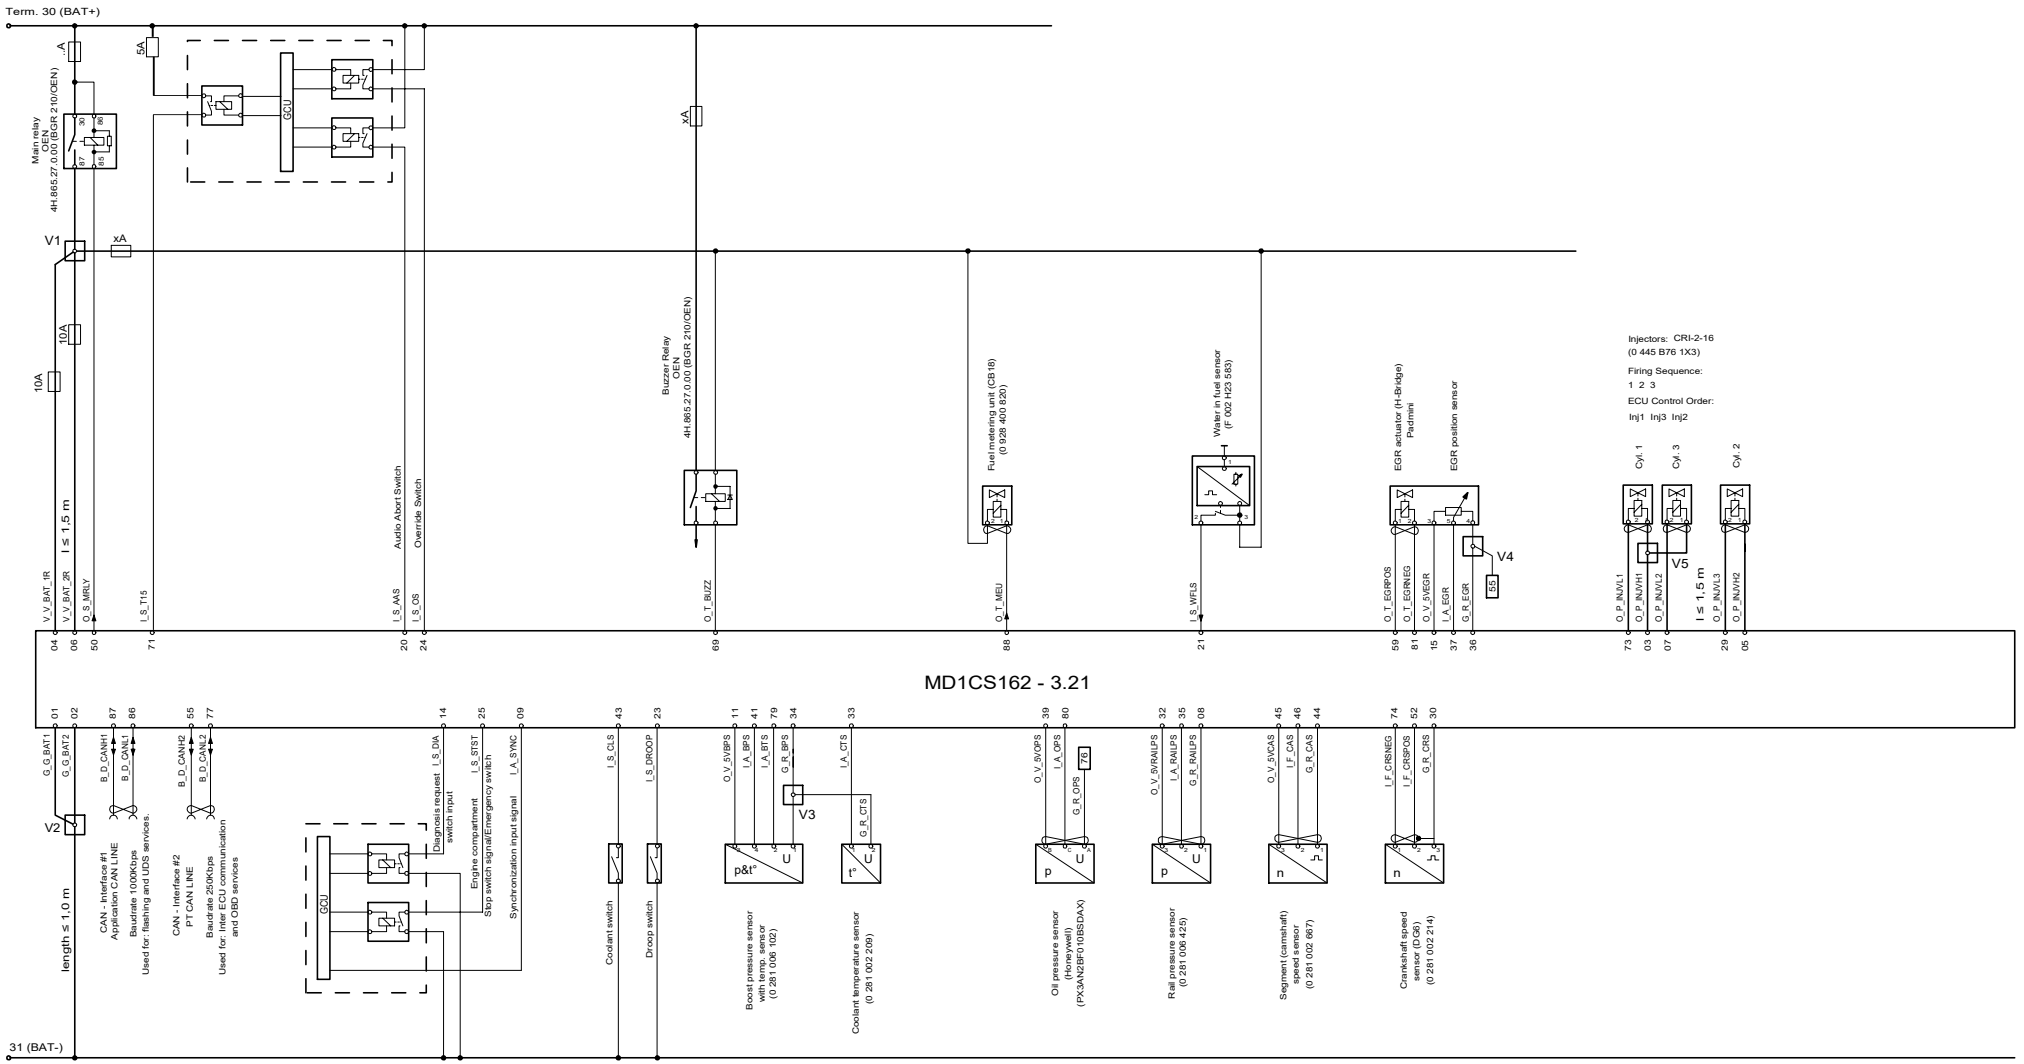


© Alle Rechte bei Robert Bosch GmbH, auch für den Fall von Schutzrechtsanmeldungen. Jede Verfügungsbefugnis, wie Kopier- und Weitergaberecht, bei uns.

© This drawing is the exclusive property of ROBERT BOSCH GmbH. Without their consent it may not be reproduced or given to third parties.

Remarks:
Harness guidelines
RBEI/EEH52 0 281 Y03 Y40

For the function of the ECU the vehicle configuration according to terminal diagram is mandatory.

Fuse arrangement is only a proposal. Electrical system is in customer responsibility.

Ⓐ - ECU pin not equipped with freewheeling diode. Freewheeling diode should be equipped inside the actuator's relay – not allowed in the wire harness.

= twisted pair recommended also recommended for all actuators

= optional functions

Vx = Butt connector

= Shielded cable

xA = Customer responsibility

xx = Line no. reference for pin sharing(not to be confused with ECU Pin no.). Please refer TD Line notation (alongside 31(BAT-) line)

Connector set: (0 462 YU3 1SZ)

No.	Revision	dr.	valid	ck.
2	Second Edition: Pins 26,67 ,42,91 removed	lkr1kor	Oct/07/2022	
1	First Edition	Yun81hc	Jun/28/2022	lkr1kor

Rev. DWG not extern. dist'd/

Non-tol. dimensions ± mm, ± | ISO E

Scale | Mass

MD1CS162-3.21 KOEL (3cyl)

	Date/	Name/
Gr.St. Volume		
dr/Yun81hc	Jun/28/2022	Anh
ck/lkr1kor	Jun/28/2022	Singh
app/		

Orig. Original: MS/EMN12

DIN A2 | CAD

ROBERT BOSCH GMBH STUTTGART

Rep. f./ | Rep. by/

Title/ Terminal diagram MD1CS162 KOEL CPCB4+ 3 cyl (3R550TA/ 3R1190NA/ 3R1190TA)

No./ 0 462 YU4 15D

0 462 YU4 15D

E | Sheet 3 | Sh/ 3

Further foreign langu. drawings

K/TDV5, ZIN (10.92)