

# Hologram with Haptic Feedback

*A literature review report submitted in partial fulfilment of the requirements for  
the award of the degree of*

***Bachelor of Technology***

*in*

***Computer Science & Engineering***

Submitted by

Leo Varghese

Mohit Rajan E

Riya Alexander



**Federal Institute of Science And Technology (FISAT)<sup>®</sup>**  
Angamaly, Ernakulam

*Affiliated to*

**APJ Abdul Kalam Technological University**  
CET Campus, Thiruvananthapuram

FEDERAL INSTITUTE OF SCIENCE AND TECHNOLOGY  
(FISAT)

Mookkannoor(P.O), Angamaly-683577



**CERTIFICATE**

This is to certify that literature review report for the project entitled “**Hologram with Haptic Feedback**” is a bonafide report of the project presented during VII<sup>th</sup> semester (CS451 - Seminar and Project Preliminary) by **Mohit Rajan E**, in partial fulfilment of the requirements for the award of the degree of Bachelor of Technology (B.Tech) in Computer Science & Engineering.

Staff in Charge

Project Guide

**Dr. Prasad J C**  
Head of the Department

## **ABSTRACT**

This paper is intended to analyze and discuss the developments made so far in the field of holography and holographic projection, it discusses the doability and the eventuality in the field of touchable holograms, which works in gear with hand gestures. In this paper, first some elementary matters about what a hologram is and a concise description of how they are devised is discussed. Then how hologram interact with our hand gestures and provide haptic feedback is discussed. In this paper the focus is on the feasibility or doability study of some methods and the analysis and consequences of these methods. Challenges in the whole process will be confronted and then some discussion about future scopes of this technology and where this technology can lead us is done.

### **Contribution by Author**

I focused on the haptics feedback and reviewed the Ultrino paper. And also reserach about multi-phased ultrasonic array. I came to the conclusion that a special or honeycomb structure can provide maximum range and optimal frequency.

Mohit Rajan E

## ACKNOWLEDGMENT

If words are considered as symbols of approval and tokens of acknowledgement, then let the words play the heralding role of expressing our gratitude. First and foremost we Thank God almighty for the Grace he showered for the successful completion of our project.

We are extremely thankful to the Chairman, Mr. Paul Mundadan, who provided us with all the vital facilities required for the successful completion of our project. We also thank our Principal, Dr. George Issac for the amenities he provided. We would like to express our sincere gratitude to Prof. Dr. Prasad JC (H.O.D) who always guided us and rendered his maximum support in all phases of our project. We are expressing our sincere gratitude to Ms. Reshmi R, Mr. Jestin Joy and Ms. Soumya S Raj, assistant professors of Department of Computer Science and Engineering for their constant support in every phase and for the source of strength in completing this work. As the project coordinators they have provided necessary assistance throughout the project. We would like to express our gratitude to the project in charge Mr. Mahesh C for his constant support and encouragement and for rendering help in all phases of our project with patience and enthusiasm. We would like to express our sincere gratitude to all the faculties of Computer Science Department, FISAT. We would like to express special thanks to our Lab instructors for providing us with all the lab facilities and for helping us throughout to make it a success. We also sincerely thank our parents and friends for giving us moral support and encouragement in all possible ways.

Mohit Rajan E

# Contents

<b>List of Figures</b>	<b>v</b>
<b>List of Tables</b>	<b>vi</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Overview . . . . .	1
1.2 Problem Statement . . . . .	1
1.3 Objective . . . . .	1
1.3.1 Application . . . . .	2
<b>2 Literature Review</b>	<b>3</b>
2.1 A Functional Optimization Based Approach for Continuous 3D Re- targeted Touch of Arbitrary, Complex Boundaries in Haptic Virtual Reality . . . . .	3
2.2 TeleHuman2: A Cylindrical Light Field Teleconferencing System . .	3
2.3 360-degree Transparent Holographic Screen Display . . . . .	4
2.4 Bringing Video Game Characters into the Real World on a Holo- graphic Light Field Display . . . . .	4
2.5 Demonstration of Refinity: An Interactive Holographic Signage for New Retail Shopping Experience . . . . .	4
2.6 Ultraino: An Open Phased-Array System for Narrowband Airborne Ultrasound Transmission . . . . .	5
<b>3 Design</b>	<b>6</b>
3.0.1 Ultraino: An Open Phased-Array System for Narrowband Air- borne Ultrasound Transmission . . . . .	6
3.1 Proposal . . . . .	6
3.1.1 Display . . . . .	6
3.1.2 Haptic feedback . . . . .	6
3.1.3 Hand Gesture . . . . .	7
<b>4 Work Plan</b>	<b>8</b>
4.1 Budget . . . . .	8
<b>5 Conclusion</b>	<b>9</b>
<b>6 Reference</b>	<b>10</b>

# List of Figures

4.1	Work Plan . . . . .	8
-----	---------------------	---

## List of Tables



# Chapter 1

## Introduction

### 1.1 Overview

Haptic holography is a combination of computational modeling and spatial display. It enables a person to see, feel, and interact with free standing holographic pictures of material surfaces that is three-dimensional in nature. In this project, holographic displays are merged with a force-feedback device to render images with programmatically, real-world material properties and behavior.

A method to produce haptic area in the air using spatial modulation of ultrasound is initiated. Method to create airborne ultrasonic tactile stimulation is based on vibrotactile radiation pressure and sensor feedback systems. The initiated approach produces a spatially standing haptic image that enables user to touch 3D images depending on vibrotactile feedback.

### 1.2 Problem Statement

In the current education system students are taught to learn formulas and how to use them but not to reason or understand the logic behind them, causing them to forget it in a short period. It is a typical longitudinal learning approach. Our brain system is not just longitudinal in learning process, but much more complex. Current education system evolved on the basis of visual and auditory senses and their application leads to memorizing the content of learning rather than creating a holistic perception. It is observed that the current education system uses mainly audio methods to teach students. In India around 10% of students suffer from some form of learning disability[1]. Research also point to the fact that visual working memory is better in students with learning disability rather than auditory working memory[2]. It can be inferred that a modern method of learning should be developed in order to increase the efficiency of learning process.

To address this issue we propose a system which uses a hologram display with haptic feedback by the interaction of using hand gestures. This project will focus on developing a system as described above to introduce a new approach to learn basic geometry.

### 1.3 Objective

To create a system which also includes somesthetic senses to learning. To achieve this a hologram display with haptic feedback is proposed. The proposed system can be used to project objects in mid-air which can be interacted by using the

hand gestures to view new objects, change or modify its properties like size, view etc.

### 1.3.1 Application

- Education : Difficult concepts which require visual can be studied with less difficulty.
- Entertainment : Holographic displays with tactile feedback can be placed in entertainment events.
- Simulations : Can be used for CAD Simulations.

## Chapter 2

### Literature Review

#### 2.1 A Functional Optimization Based Approach for Continuous 3D Retargeted Touch of Arbitrary, Complex Boundaries in Haptic Virtual Reality

Yiwei Zhao et al. [1], Actuated physical props can provide haptic feedback. It leads to a sense of realism in virtual reality. However, the differences between the physical and virtual surfaces can diminish user experience. Haptic retargeting can overcome this limitation by utilizing visio-haptic effects. Investigations made earlier in haptic retargeting have focused on methods for point based position retargeting and techniques for remapping 2D shapes or simple 3D shape changes. This approach extends haptic retargeting to complex, arbitrary shapes, it provides a continuous mapping across all points on a boundary. This new approach also allows multi-finger interaction. Functional optimization to find the ideal spatial warping function with different goals: a maximum mapping smoothness, a minimum difference between the real and virtual world, or the combination of the latter. Preliminary user study of different optimization goals and to elaborate potential applications through a set of demonstrations is reported.

#### 2.2 TeleHuman2: A Cylindrical Light Field Teleconferencing System

Dan Gotsch et al. [2], For telepresence to support multiparty conversations, it is important to convey motion parallax and stereoscopy without head-worn apparatus. TeleHuman2 is a “hologrammatic” telepresence system. It conveys full body 3D video of interlocutors using a human-sized cylindrical light field display. For rendering, the system uses an array of projectors mounted above the heads of participants in a ring around a retroreflective cylinder. Unique angular renditions are calculated from streaming depth video captured at the remote location. Projected images are retro-reflected into the eyes of local participants, at 1.3o intervals providing angular renditions simultaneously for left and right eyes of all onlookers, which conveys motion parallax and stereoscopy without head-worn ap-

paratus or head tracking. Our technical evaluation of the angular accuracy of the system demonstrates that the error in judging the angle of a remote arrow object represented in TeleHuman2 is within 1 degree, and not significantly different from similar judgments of a collocated arrow object.

## **2.3 360-degree Transparent Holographic Screen Display**

Tomoharu Nakamura et al. [3], A technique for creating a sense of reality to 2D images. We have succeeded in producing a holographic screen with higher transparency compared to one based on conventional technology. With the combination of a 360- degree transparent holographic screen display and sensing technology using multiple high-speed cameras, the observer gets the feeling that an object is “actually there”. Fusion of the background and the image increases the feeling of “floating” in the image by using a holographic screen, and the multiple high-speed cameras can make the motion parallax image according to the position of the observer in real time. Therefore, the image seems to be at the center of the cylinder.

## **2.4 Bringing Video Game Characters into the Real World on a Holographic Light Field Display**

Jorge Arroyo-Palacios et al. [4], The design and technical choices of a proof of concept migrating video game character that can move from a game environment to a holographic environment rendered on a novel holographic light field display. These two environments with interactions that are consistent to each other, using a game controller for interaction in the game environment and voice, gesture and face tracking in the holographic environment. Finally, a study to assess the level of social presence, consistent migration and coherent experience in our proposed system.

## **2.5 Demonstration of Refinity: An Interactive Holographic Signage for New Retail Shopping Experience**

Jin Ryong Kim et al. [5], This demo presents Refinity. It is an interactive holographic signage for the new retail shopping experience. In the demo, a concept of futuristic shopping experience with a tangible 3D mid-air interface that allows

customers to directly select and explore realistic virtual products. 3D display combined with mid-air haptics and finger tracker. We also present an example of in-store shopping scenario for natural interactions with 3D. This shopping engages users in fabricating a memorable in-store experience with the merging of digital and physical interactions.

## **2.6 Ultraino: An Open Phased-Array System for Narrowband Airborne Ultrasound Trans- mission**

In [x] the author has created a phased array using 40Khz ultrasonic sensors. They have demonstrated multiple example application for the same. The haptic feedback was achieved with a semi-spherical array, which was build using transducers and 3d printed base. This design provides focal point at 2cm from the base. An animation with 100 periods with the array on and 100 periods with the array off is defined . This generated a focal point at 200Hz. This frequency is known to be more sensitive to mechanoreceptors in our skins. The focal point can be created at different positions to electronically change where the tactile sensation is applied.

## Chapter 3

### Design

#### 3.0.1 Ultraino: An Open Phased-Array System for Narrowband Airborne Ultrasound Transmission

A phased array using narrow-band ultrasonic(40Khz) transducers is created. The system hardware consists of a driver board capable of reading the amplitude and phases produced by the software and then generating half-square wave driving signals of up to 17 Vpp and  $\pi/5$  phase resolution for 64 individual channels. The software allows users to define array geometries and then visualize the resulting acoustic fields. The software can calculate the phase and amplitudes of the transducers required for the chosen beam forming operations.

The array consists of setting the position and orientation of the transducers. First, the aperture of the radiating pistons, the frequency, and the output amplitude constant are set for simulating the generated acoustic field. Once imported, the transducers can be moved, rotated, or scaled by the user in real time.

### 3.1 Proposal

The proposed system consist of three sub-systems

- Display
- Haptic feedback
- Hand gesture recognizing system.
- Software component

#### 3.1.1 Display

Hologram was selected as the method of display. Since previous research has shown learning geometry with hologram is better than traditional methods[3].

#### 3.1.2 Haptic feedback

Haptic feedback is added to add a somesthetic senses to learning. And also as a response to convey the previous command by the user has been registered.

### **3.1.3 Hand Gesture**

Hand Gestures are used as the input to the system and will be used by the user to interact with the system. The hand gesture is process using Google MediaPipe library.

# Chapter 4

## Work Plan

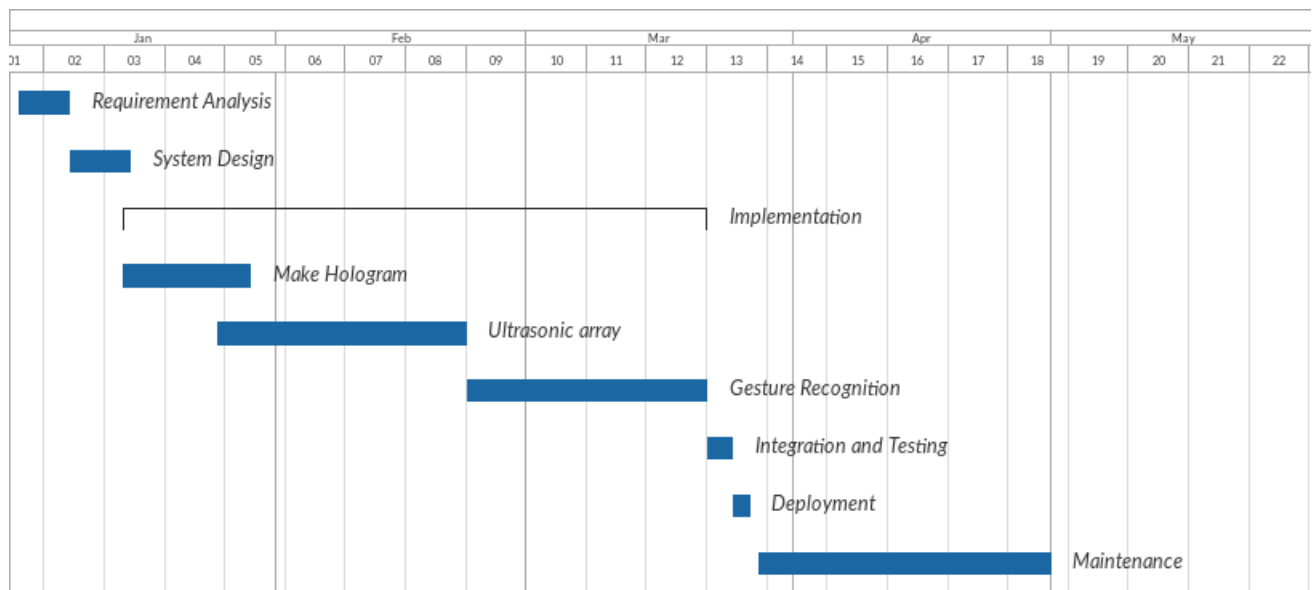


Figure 4.1: Work Plan

## 4.1 Budget

Item	Price	Quantity	Total
Ultrasonic sensor	350	100	3500
LCD display	20000	1	20000
Transparent sheet	200	4	800
Frame	5000	1	5000
Micro-controllers + electronics	1000	1	1000
LiDar + camera	3000	1	3000
<b>Total:</b>			<b>33,300</b>



## **Chapter 5**

### **Conclusion**

The device discussed here is system with a hologram display which can provide haptic feedback. The system will consist of an ultrasonic array to provide the feedback. While the use of camera and Machine Learning to track and read hand gestures.

After the literature survey, it has been determined that a phased array with about 64 transducers are sufficient for haptic feedback.

To implement the hologram display, Holographic plates which transmits 90% of the light is used. He-Ne laser is used for this purpose.

## Chapter 6

### Reference

- [1] Y. Zhao, S. Follmer, "A functional optimization based approach for continuous 3D retargeted touch of arbitrary complex boundaries in haptic virtual reality", Proc. CHI, pp. 544: 1-544: 12, 2018.
- [2] Gotsch, D., Zhang, X., Merritt, T., and Vertegaal, R. Telehuman2: A cylindrical light eld teleconferencing system for life-size 3d human telepresence. In Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems, ACM (2018), 522.
- [3] Nakamura, T., Yano, T., Watanabe, K., Ishii, Y., Ono, H., Tambata, I., Furue, N. and Nakahata, Y., 2019, July. 360-degree transparent holographic screen display. In ACM SIGGRAPH 2019 Emerging Technologies (p. 1). ACM.
- [4] Arroyo-Palacios, Jorge, Mahdi Azmandian, and Steven Osman. "Bringing Video Game Characters into the Real World on a Holographic Light Field Display." Proceedings of the 19th ACM International Conference on Intelligent Virtual Agents. ACM, 2019.
- [5] Kim, Jin Ryong, et al. "Demonstration of Refinity: An Interactive Holographic Signage for New Retail Shopping Experience." Extended Abstracts of the 2019 CHI Conference on Human Factors in Computing Systems. ACM, 2019