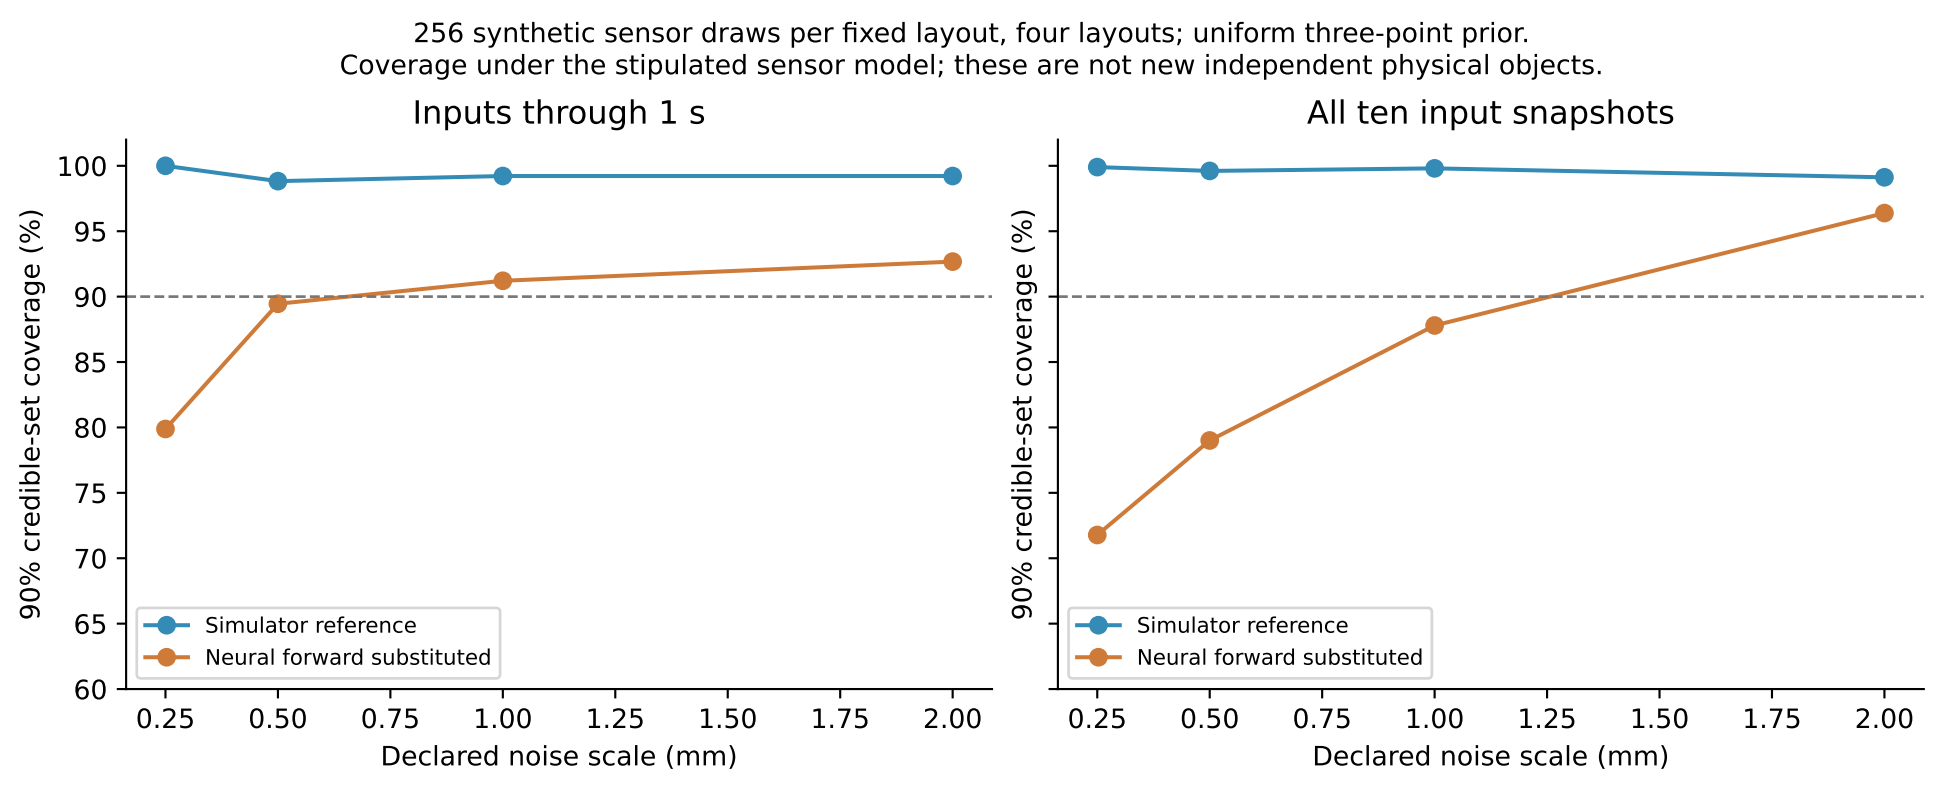
256 synthetic sensor draws per fixed layout, four layouts; uniform three-point prior.
Coverage under the stipulated sensor model; these are not new independent physical objects.
Inputs through 1 s
All ten input snapshots
90% credible-set coverage (%)
100
95
90
85
80
75
70
65
60
Simulator reference
Neural forward substituted
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
Declared noise scale (mm)