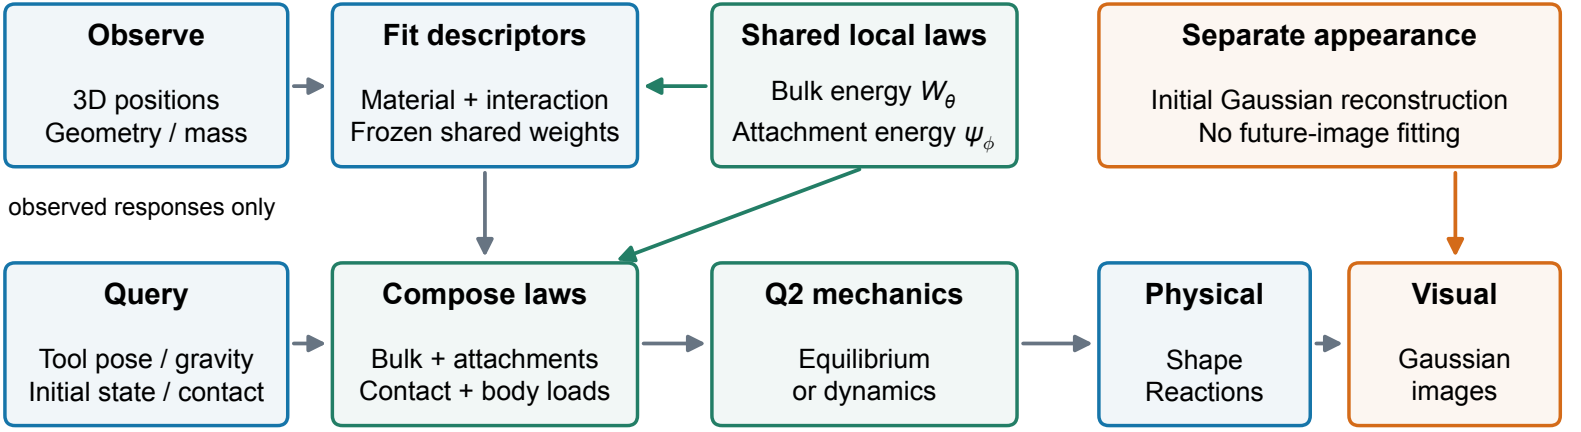

Evaluate physical error and held-view image quality separately; retain failed forecasts.