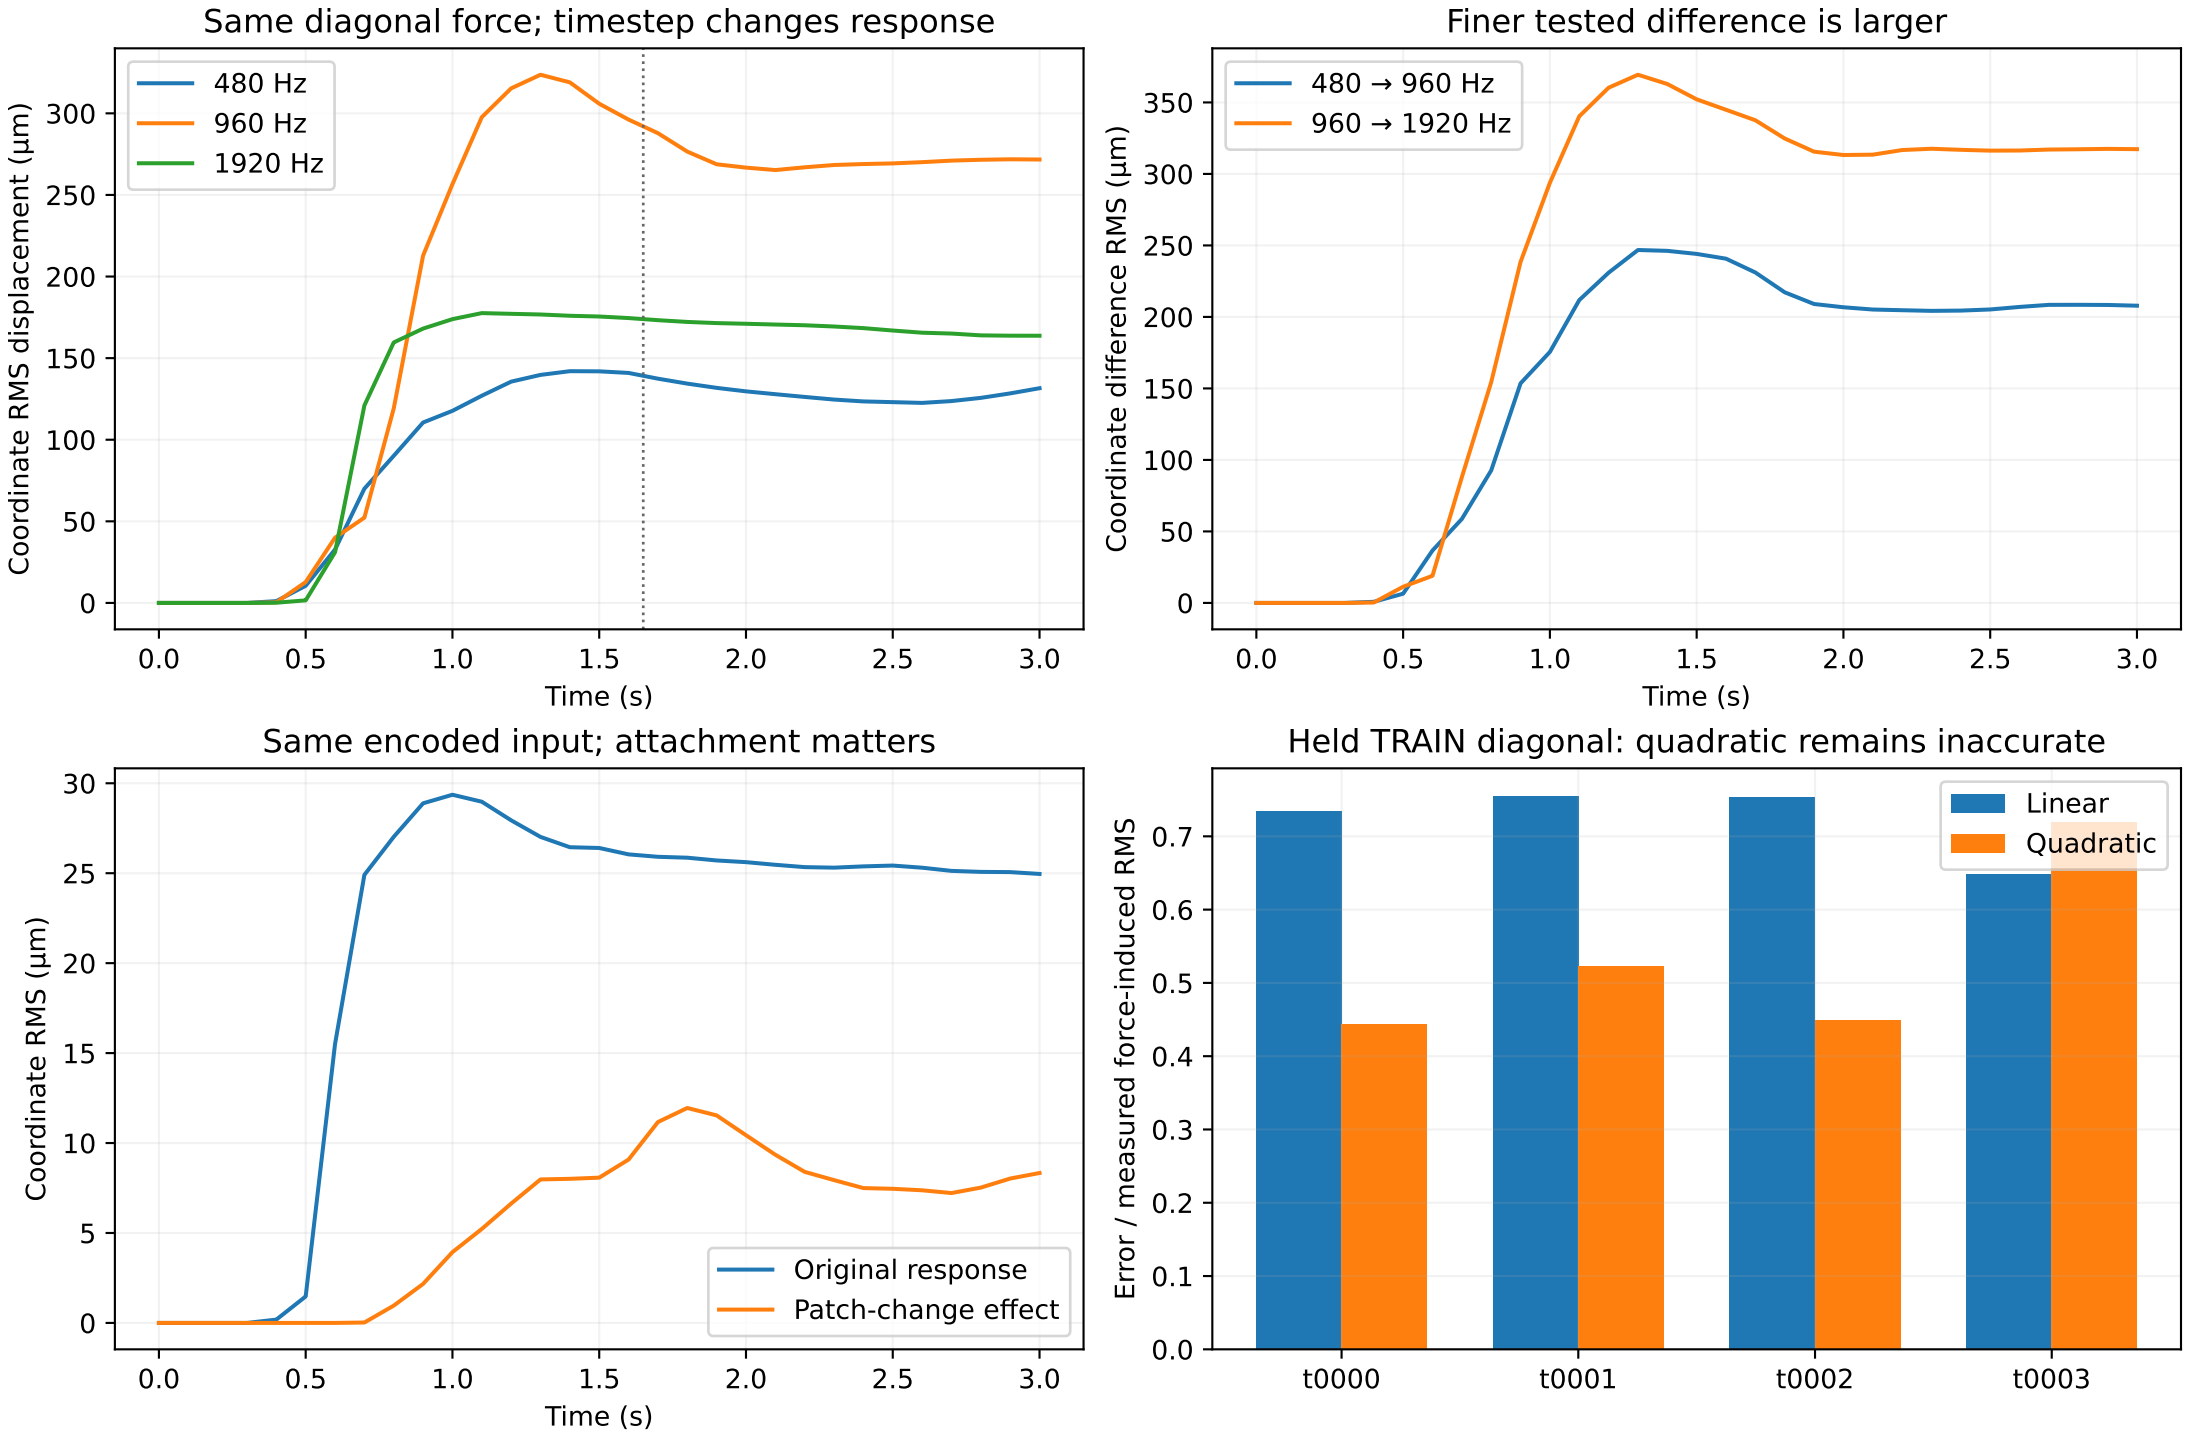
Same diagonal force; timestep changes response
480 Hz
960 Hz
1920 Hz
Coordinate RMS displacement (µm)
Time (s)
Finer tested difference is larger
480 → 960 Hz
960 → 1920 Hz
Coordinate difference RMS (µm)
Time (s)
Same encoded input; attachment matters
Original response
Patch-change effect
Coordinate RMS (µm)
Time (s)
Held TRAIN diagonal: quadratic remains inaccurate
Linear
Quadratic
Error / measured force-induced RMS
t0000
t0001
t0002
t0003