

Table 3.17.: Assembly, Group A, B, C.

ITEMS	REQUIREMENTS
5. AISLE SERVING SEATING NOT AT TABLE.	<ul style="list-style-type: none"> i. Minimum aisle width serving seating on both sides shall not be less than 1200 mm. ii. Minimum aisle width serving seating on only one side shall not be less than 915 mm. iii. Minimum aisle width serving not more than 50 people shall not be less than 915 mm. iv. Minimum 585 mm between seating and handrail, when aisle or ramp is subdivided by a handrail.
6. AISLE DEAD END	<ul style="list-style-type: none"> i. Maximum dead end in an aisle is 6.1 m. in length.
7. AISLE RAMP	<ul style="list-style-type: none"> i. Aisles having slope 1 in 20 to 1 in 8 shall consist of a ramp.
8. AISLE STAIR	<ul style="list-style-type: none"> i. Aisles steeper than 1 in 8 slope shall consist of a Stair. ii. The tread depth shall not be less than 280 mm. Treads shall be uniform in depth and extend to full width of aisle. iii. Aisle riser shall not be less than 100 mm and shall not exceed 205 mm in height. Riser height shall be uniform throughout the aisle stair.
9. AISLE LANDING	<ul style="list-style-type: none"> i. Where the path of travel on a stair, an aisle stair, or aisle ramp continues to another stair of different rise or tread depth, another aisle stair of different rise or tread depth, or another aisle ramp of different slope, there shall be a landing whose depth is equal to or greater than the width of the aisle stair or ramp. ii. No landing is required between aisle ramps of different slopes. iii. No landing shall be required between an aisle ramp and an aisle Accessway or between an aisle stair and an aisle Accessway.
10. AISLE HANDRAIL	<ul style="list-style-type: none"> i. Ramped aisles having a gradient exceeding 1 in 20 and aisle stairs shall be provided with handrails at one side or along the centerline. ii. Where seating exists on both sides of the aisle, the handrails shall be noncontinuous with gaps or breaks of 560 mm - 915 mm in width, at intervals not exceeding five rows to facilitate access to seating and to allow crossing from one side of the aisle to the other.

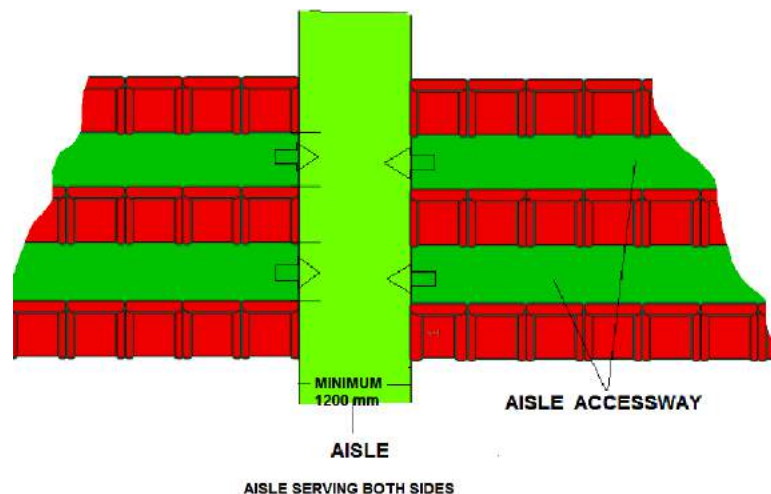


Figure 3.22.c.: Aisle Serving both sides