BIKAI

Build Innovation · Keep Accuracy Intact

PRODUCT PORTFOLIO 2026

PRECISION ANALYSIS

FOR A BETTER FUTURE



The BIKAI portfolio

Five product families. The right configuration for your lab.

CONTENTS

01 **Chromatography** 03-06
HPLC 1511 Pro / UHPLC 1521 Pro / GC7000

02 **Mass spectrometry** 07-10
SQ1610/TQ1620/TQ1621/GCMS7500/GCMSMS7600

03 **Spectroscopy** 11-12
UV3400/UV3600

04 **Protein purification** 13
Puro5000

05 **Nitrogen generation** 14
Light series

06 **Service & application support** 15
Training · Application consultation · After-sales service

Liquid chromatography

1511 Pro HPLC and 1521 Pro UHPLC



1511 Pro HPLC

11,600psi

A highly configurable platform designed to meet diverse application needs.

LC configuration options

LC Type

Analytical	Preparative	Bio-inert	2D-LC

Pump

Isocratic	Binary	Quaternary	Dual-ternary

Autosampler / Injector

Aspiration	Flow-through needle (FTN)	Manual

Detectors

UVD	DAD	FLD	ELSD	RID	CAD




1521 Pro UHPLC

18,000psi

Maximum pressure for demanding separations and LC-MS workflows.

Flexible configurations

Pump, injection and detection options matched to the method.

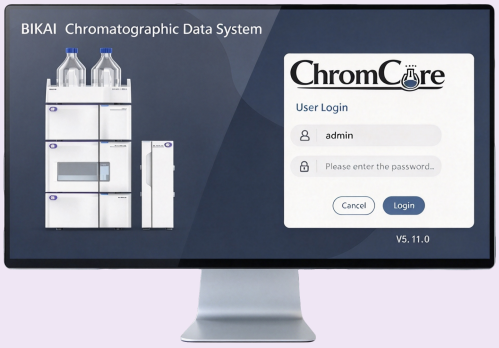

ChromCore CDS

- **Intuitive workflow** – acquisition, processing, and reporting in one workstation.
- **Compliance ready** – GMP/GLP integrated, FDA 21 CFR Part 11 compliant.




Columns and consumables


- LC columns, sample vials and maintenance parts support the selected analytical configuration.

Applications

Analysis of the Amino Acid Composition of Semaglutide

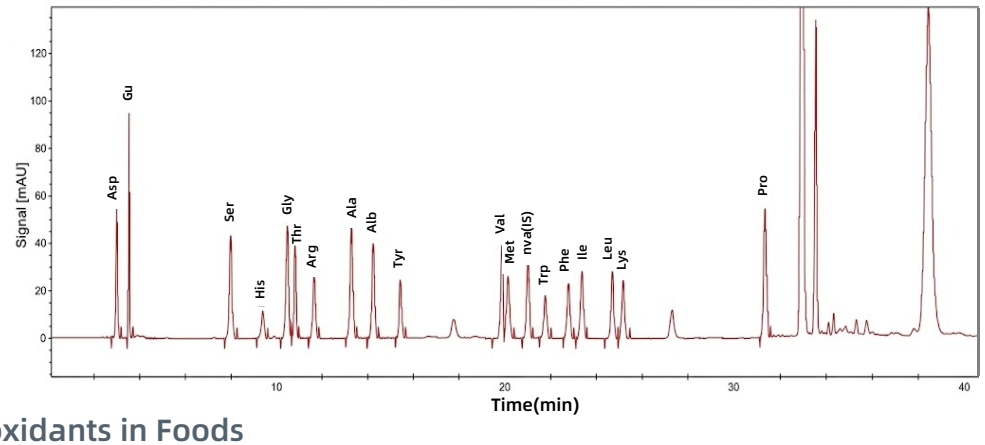

Determination of 9 Antioxidants in Foods

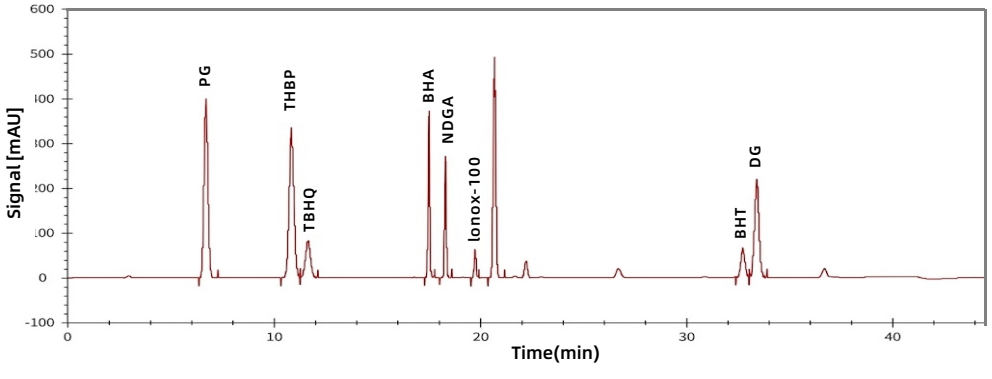

GC 7000

Configurable gas chromatography for routine testing and specialized methods.



COLUMN OVEN

450 °C

120 °C/min 100 steps

APC / EPC PRECISION

0.001 psi

RT RSD < 0.006%

IOT CONTROL

3 devices

PC | Tablet | Phone

PLUG-AND-PLAY DETECTORS

FID · TCD

ECD | FPD | NPD

Application coverage

Environmental Monitoring

VOCs, pesticides, PAHs

Pharma & Health

Drug purity, residual solvents, screening


Food Safety

Pesticides, additives, flavor profiling


Petrochemical

Fuel composition, natural gas, impurities

Natural Gas Composition Analysis

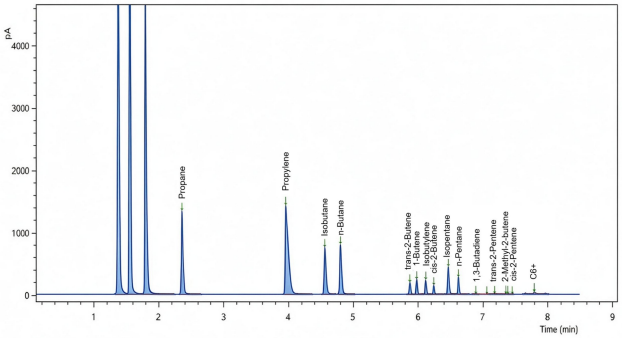

NMOC / NMTHC Analysis in Ambient Air

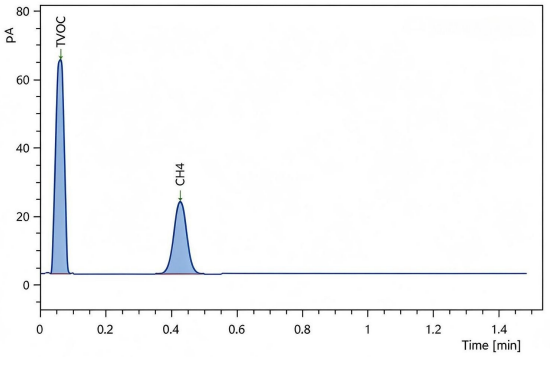

GC sampling solutions

Liquid, gas and multifunction sampling for different sample types.



161
max vials

ASL 7100 SERIES

Liquid Autosampling

19 / 24 / 22 vial — STANDARD TOWER

<1/1000 s — DUAL-TOWER SYNC

Expandable to 161 vials (ASL7100B) · 5" touchscreen + PC control · 24/7 unattended.




0
residue

ASG 7120

Gas Autosampling

PTFE · PEEK · Inert Path

Seamless GC integration · automated line/loop/gas bag cleaning · modular design with auto standard curve and ultra-high concentration protection.

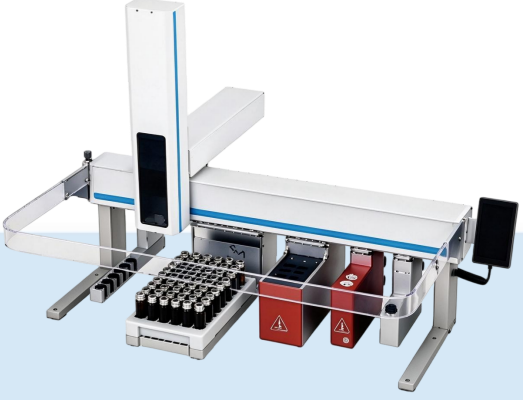

3+1
modes

ASM 7130


Multifunction Sampling

Liquid · Headspace · SPME · Standard Prep

3 sampling modes + standard preparation · dual-GC operation · 24/7 unattended workflows.

SQ 1610

Single-quadrupole LC-MS for routine analytical workflows.

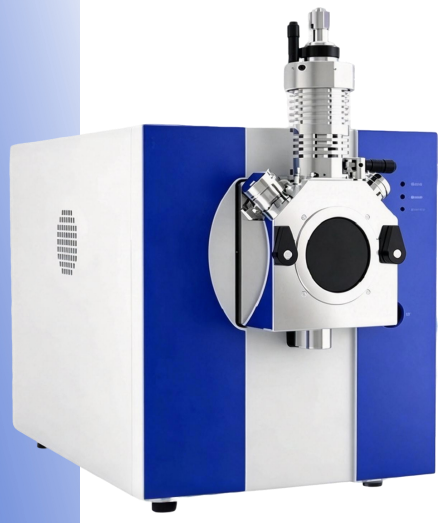

MASS RANGE

5–2000 m/z

Wide coverage for small molecules and routine testing.

SCAN SPEED

10,000 amu/sec

Fast data acquisition for high-throughput workflows.


SENSITIVITY

100:1 S/N


1 pg reserpine, on-column injection.

Application: Determination of 8 Quinolones


Selected Ion Chromatograms (SIC) of 8 Quinolones at 10 ppb




Pipemidic acid




Nalidixic acid




Fleroxacin




Lomefloxacin




Sparfloxacin



Sarafloxacin



Difloxacin



Orbifloxacin

Excellent linearity was observed for all 8 quinolones, with Coefficient of Determination (R^2) all greater than 0.9963.

Compound	Retention Time (min)	Linear Range (ng/mL)	LOD (ng/mL)	Coefficient of Determination (R^2)
Nalidixic acid	2.438	0.5-200	0.5	0.9986
Pipemidic acid	1.427	1-200	1.0	0.9980
Lomefloxacin	1.709	1-200	1.0	0.9969
Fleroxacin	1.518	1-200	1.0	0.9981
Sarafloxacin	1.792	1-200	1.0	0.9981
Sparfloxacin	1.741	0.5-200	0.5	0.9968
Orbifloxacin	1.733	0.5-200	0.5	0.9979
Difloxacin	1.741	0.5-200	0.5	0.9963

TQ 1620 / TQ 1621

Triple-quadrupole LC-MS/MS for targeted quantitative analysis.



TQ 1621 shown

TQ1620

≥500,000
S/N

Mass range: 5-2000 amu

Fore pump: Mechanical oil pump

TQ1621A

≥1,500,000
S/N

Mass range: 5-2000 amu

Fore pump: Oil-free dry pump

TQ1621B

≥2,000,000
S/N

Mass range: 5-1250 amu

Fore pump: Oil-free dry pump

90°
ION SOURCE
ESI± / APCI± fast switching, right-angle spray for contamination resistance

Gold
MASS ANALYZER
Gold-coated quadrupoles with pre-rods for fringe-field elimination

180°
COLLISION CELL
Curved collision cell with axial acceleration for low MRM crosstalk

High Energy
DETECTOR
Discrete dynode electron multiplier, low noise, long lifetime

21 CFR Part 11
COMPLIANCE
IonCore + MassCore software · GMP / GLP compliant

Application coverage



Pesticide & Veterinary Drug Residue Testing



Food Safety Testing



Environmental Testing



Pharmaceutical Analysis

GCMS 7500

Single-quadrupole GC-MS for routine identification and quantitative methods.



SENSITIVITY

2500:1
S/N, 1 pg OFN

EI source, full-scan and SIM modes.

DETECTION LIMIT

<10
fg OFN

IDL: 100 fg OFN, 8 injections, m/z 272.

MASS RANGE

1.5–1250
amu

Wide coverage for environmental, food and chemical analysis.

EI/CI

ION SOURCE

High-temperature inert EI source, dual filament,optional CI

High Gain

DETECTOR

Discrete dynode electron multiplier for ultratrace detection.

21 CFR Part11

COMPLIANCE

GMP/GLP compliant

30
min startup

Fast, Reliable GC-MS Analysis

Dual vacuum chamber with independent pumping·column flow up to **5 mL/min** (10 mL/min optional)·ready in **30 minutes**

Environmental testing

Organic-contaminant analysis with the appropriate extraction, separation and detection method.

Research and chemical analysis

Mass-spectral information supports compound identification and quantitative method development.

Supporting the workflow

Sampling options, acquisition software and data processing belong to the complete system configuration. Refer to the dedicated brochure for method and performance details.

GCMSMS 7600

Triple-quadrupole GC-MS/MS for selective, targeted analysis.



SENSITIVITY

100,000:1

S/N, EI MRM

100 fg OFN (272→222 ion pair).

DETECTION LIMIT

<0.3

fg OFN

IDL: 1 fg OFN, 8 injections, 272→222.

MASS RANGE

1.5–1250

amu

Wide coverage for targeted quantitative analysis.

Ion Source

- **Ceramic EI** source, high-temperature resistant, optional CI.

Mass Analyzer

- Dual pre-quadrupole with axial linear acceleration.

Detector

- High-gain electron multiplier with discrete dynode mode.

Software

- **Acquisition:**

Integrated workflow with manual/automatic tuning, sequence editing, real-time display. Supports Scan, Product Ion, Precursor Ion, Neutral Loss, SIM, SRM, MRM, and DMRM.

- **Analysis:**

Batch processing with one-click standard curve; rapid multi-compound identification; intelligent pesticide residue screening and Automatic Adjustment of Retention Time (AART).

- **Compliance:**

FDA 21 CFR Part 11, GMP, GLP compliant.

Applications: Ideally suited for scientific research, pesticide residue analysis, environmental monitoring, and life sciences.

UV 3400

A compact UV-Vis platform for routine laboratory measurements.



WAVELENGTH RANGE

190–1100 nm

Wide coverage for routine UV-Vis measurements.

SPECTRAL BANDWIDTH

2 nm

Wavelength accuracy: ± 0.3nm.

STRAY LIGHT

≤ 0.05% %T

Wavelength repeatability: ≤ 0.5nm.

User-Friendly Interface

- Smart status indicator: running / idle / fault at a glance.

Measurement Modes

- Photometric, multiwavelength, wavelength scan , time scan , quantitative analysis.

Easy Maintenance

- Plug-in deuterium lamp: quick replacement, less downtime.

01 02 03 04 05

Stable & Visualized Optical System

- Ratio Dual-Beam: real-time compensation, low baseline drift.
- Sealed optics: corrosion resistance, high precision.

Flexible & Compact Design

- 4-cell manual standard; optional 6-cell and 50 mm holder.

UV 3600

UV-Vis measurement with local control and workstation options.



WAVELENGTH RANGE

190–1100 nm

Double-beam and split-beam optical design.

SPECTRAL BANDWIDTH

0.5–4 nm

4 selectable options: 0.5 / 1 / 2 / 4 nm.

STRAY LIGHT

≤0.03 %T

Ultra-low stray light for precise measurement.

UltraUV Workstation PART-01

- Intuitive ribbon interface
- Spectrum scan, kinetics, photometric, quantitative

GLP/GMP compliant: user accounts, audit trail

Quartz & glass cuvettes


PART-02 Accessories


- 8-cell holder
- Long-path cell holder (5–100 mm)
- Solid sample holder
- Absolute reflectance attachment

Application: Determination of Acetic Acid in Water

0.9998 R^2

Excellent linearity (R^2=0.9998)observed at 200nm.
Versatile test solutions for routine and research use.

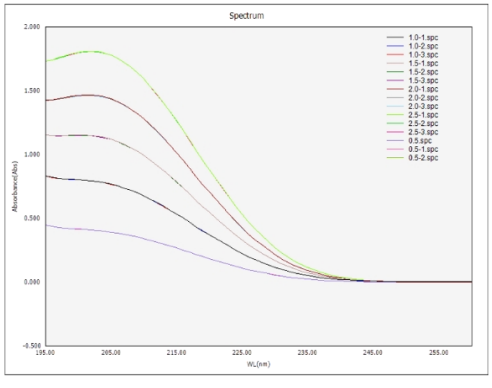

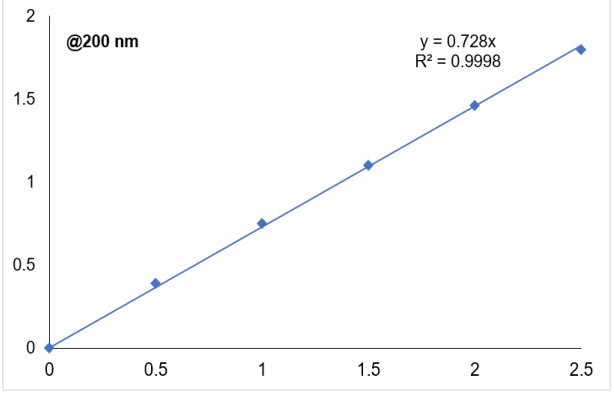

Puro 5000

A dedicated purification platform with a bio-inert flow path.



Bio-inert materials

Flow-path materials support compatible handling of biomolecules.

Configurable purification


Modular options support different purification scales and automation needs.

Integrated fluid handling

Sample-pump and valve arrangements support a compact purification flow path.

- Peptides
- Nucleic Acids
- Vaccines
- Polysaccharides
- Blood Products
- Antibodies
- Recombinant Proteins
- Viruses

Application: Purification of Inclisiran Sense Strand (SS)

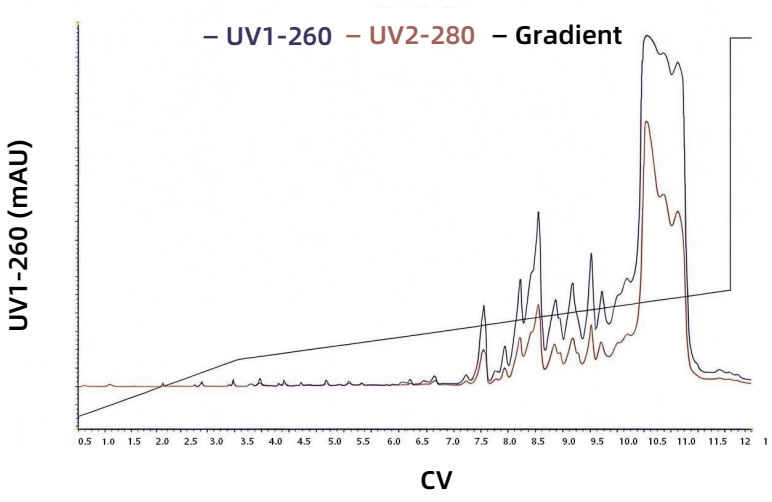

- **Sample Information:**

Sense Strand SS I010621RSM61-SS, Ammonolysis crude

- **Sample Concentration:**

1.26 mg/ml

- **Purification Conditions:**

Gradient elution

Detection at 260 nm / 280 nm

Light series

Gas supply as a key component of the LC-MS laboratory workflow.

Light35

19

L/min N_2 flow

Pressure:60 psi
Noise:59 dB(A)

Light35 Pro

35

L/min N_2 flow


Pressure:116 psi
Noise:65 dB(A)

Light70

70

L/min N_2 flow

Pressure:116 psi
Noise:65 dB(A)

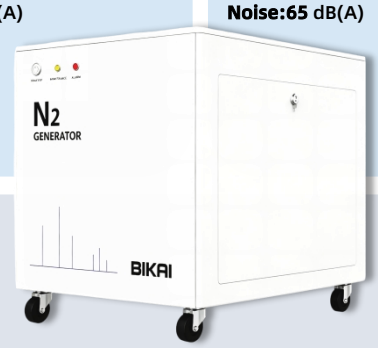



Matching the generator to the instrument

Solution	Brand	Model/Series
Light35	BIKAI	SQ1610/TQ1620/TQ1621
	AB Sciex	Triple Quad MS System/ QTRAP MS
		System 3200/3500/4000/4500/4600/5500/5600+/6500+/6600
Light35 Pro	Agilent	6200 series TOF MS
		6400 series Triple Quad MS/Ultivo Triple Quad MS
		6490/6495 Triple Quad MS
		6500 series QTOF MS
	Bruker	timsTOF series
		Compact, impact HD, maXis HD ESI-QTOF
		solariX MRMS / scimaX MRMS
	Shimadzu	LCMS-2020 single Quad MS
	Thermo	Orbitrap Exploris 120/ 240/ 480
		MSQ / ISQ series Single Quad MS
		TSQ Altis, Fortis, Quantis, Endura, Quantum Triple Quad MS
		LTQ XL/ LCQ Fleet/ Velos Ion Trap MS
		Q Exactive Plus Hybrid, UHMR Hybrid, HF Hybrid, Focus Hybrid Quadrupole Orbitrap
		Orbitrap ID-X, Tribrid, Fusion, Lumos, Eclipse, Exactive Plus, Elite
Light70	Agilent	6550/6560 QTOF MS

Service & application support

Support tailored to your laboratory workflow

From discussing your analytical requirements to building operator expertise, we help you plan the support needed for your instrument setup.

01

Installation planning

- Site readiness check
- Utilities and configuration review
- Installation and handover scope

02

Operator training

- Instrument operation
- Workstation software
- Data acquisition, processing, reporting

03

Application consultation

- Sample matrix and target analytes
- Method objectives
- Configuration and accessory advice

04

After-sales service

- Technical assistance
- Maintenance review
- Via BIKAI or your local partner

Driving application innovation

Leveraging its comprehensive instrument portfolio, BIKAI is evolving into a broader provider of application innovation and laboratory solutions.

BIKAI

Resources and support

Product information, application resources and a direct route to BIKAI.

Learn more about BIKAI

www.bikaicorp.com/about-us.html

Get application guidance

www.bikaicorp.com/pre-sales.html

Explore application resources

www.bikaicorp.com/applications

Latest news

www.bikaicorp.com/latest-news.html


Follow BIKAI on LinkedIn

www.linkedin.com/company/bikai-suzhou

Website

Support

LinkedIn

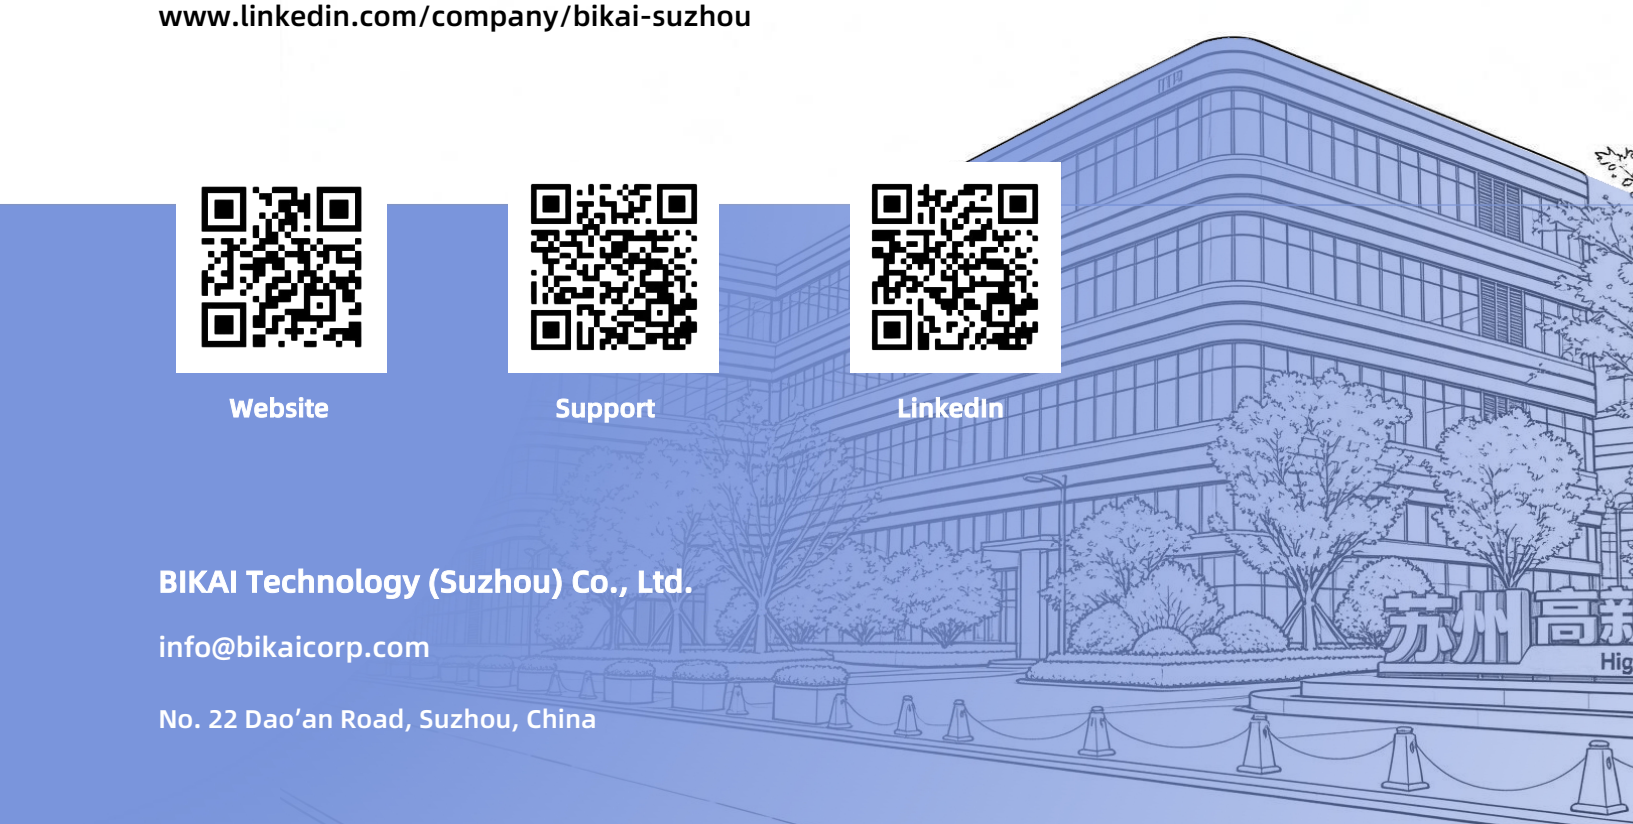

BIKAI Technology (Suzhou) Co., Ltd.

info@bikaicorp.com

No. 22 Dao'an Road, Suzhou, China