



Week 3

# DNS, P2P, Video Streaming & CDN

CSCM603154 – **Computer Networks**

Faculty of Computer Science Universitas Indonesia

All material taken from “Computer Networking: A Top-Down Approach”  
copyright 1996-2020, J.F Kurose and K.W. Ross, All Rights Reserved

# Application Layer: Overview

- Principles of network applications
- Web and HTTP
- The Domain Name System DNS
- P2P applications
- video streaming and content distribution networks
- socket programming with UDP and TCP



# DNS: Domain Name System

*people:* many identifiers:

- SSN, name, passport #

*Internet hosts, routers:*

- IP address (32 bit) - used for addressing datagrams
- “name”, e.g., cs.umass.edu - used by humans

Q: how to map between IP address and name, and vice versa ?

## Domain Name System (DNS):

- *distributed database* implemented in hierarchy of many *name servers*
- *application-layer protocol*: hosts, DNS servers communicate to *resolve* names (address/name translation)
  - *note*: core Internet function, implemented as application-layer protocol
  - complexity at network’s “edge”

# DNS: services, structure

## DNS services:

- hostname-to-IP-address translation
- host aliasing
  - canonical, alias names
- mail server aliasing
- load distribution
  - replicated Web servers: many IP addresses correspond to one name

## *Q: Why not centralize DNS?*

- single point of failure
- traffic volume
- distant centralized database
- maintenance

## *A: doesn't scale!*

- Comcast DNS servers alone: 600B DNS queries/day
- Akamai DNS servers alone: 2.2T DNS queries/day

# Thinking about the DNS

humongous distributed database:

- ~ billion records, each simple

handles many *trillions* of queries/day:

- *many* more reads than writes
- *performance matters*: almost every Internet transaction interacts with DNS - msec count!


organizationally, physically decentralized:

- millions of different organizations responsible for their records

“bulletproof”: reliability, security



# DNS: a distributed, hierarchical database

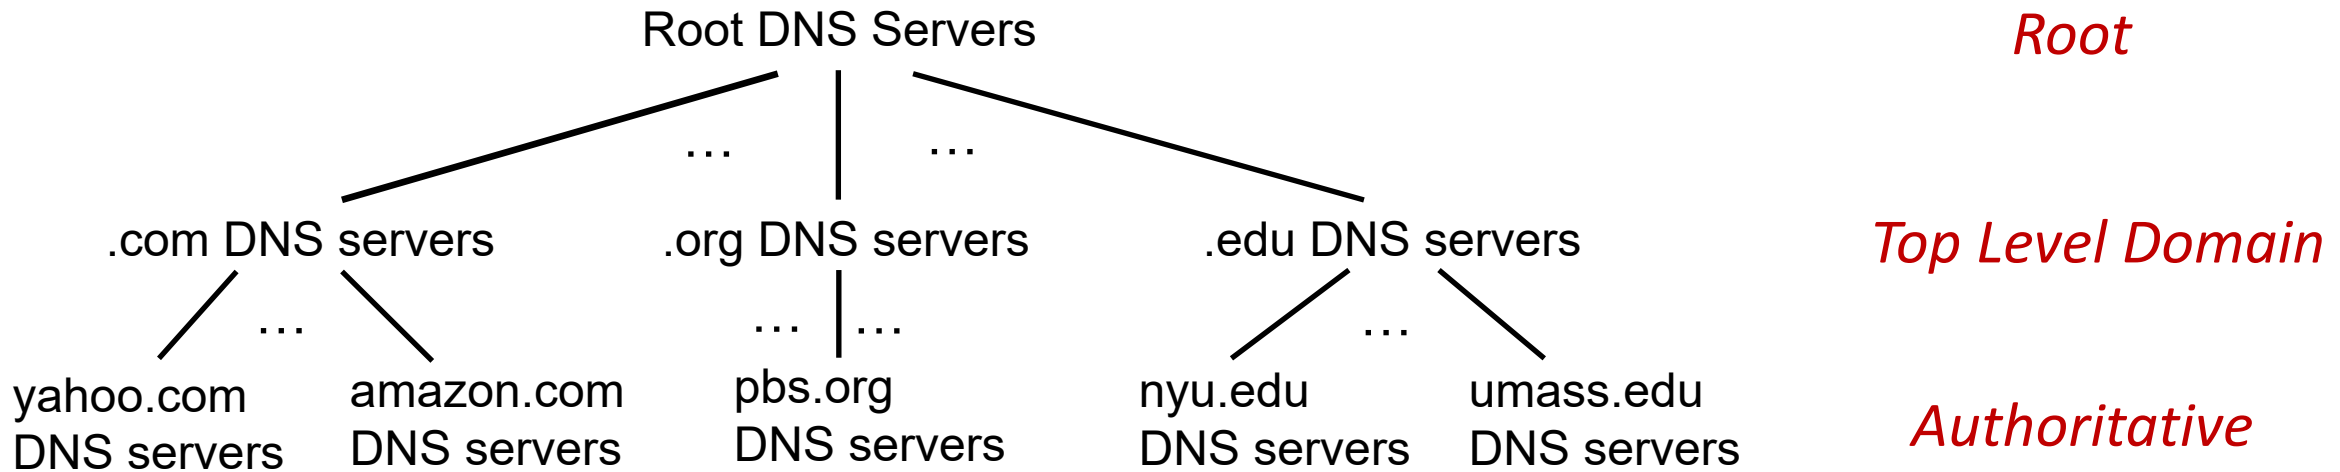


Client wants IP address for `www.amazon.com`; 1<sup>st</sup> approximation:

- client queries root server to find `.com` DNS server
- client queries `.com` DNS server to get `amazon.com` DNS server
- client queries `amazon.com` DNS server to get IP address for `www.amazon.com`

# DNS: root name servers


- official, contact-of-last-resort by name servers that can not resolve name

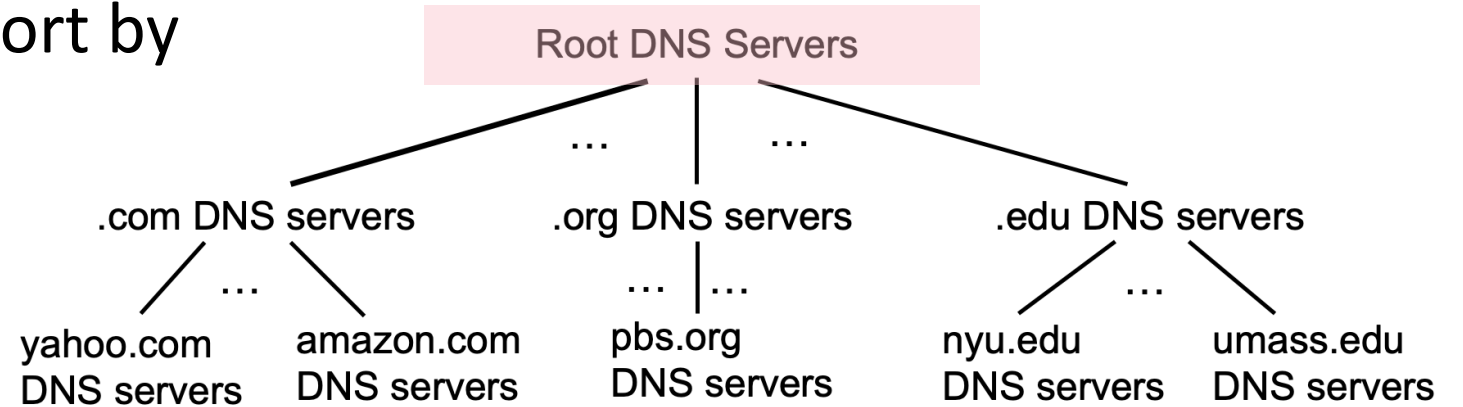

# DNS: root name servers

- official, contact-of-last-resort by name servers that can not resolve name
- *incredibly important* Internet function
  - Internet couldn't function without it!
  - DNSSEC – provides security (authentication, message integrity)
- ICANN (Internet Corporation for Assigned Names and Numbers) manages root DNS domain

13 logical root name “servers”  
worldwide each “server” replicated  
many times (~200 servers in US)

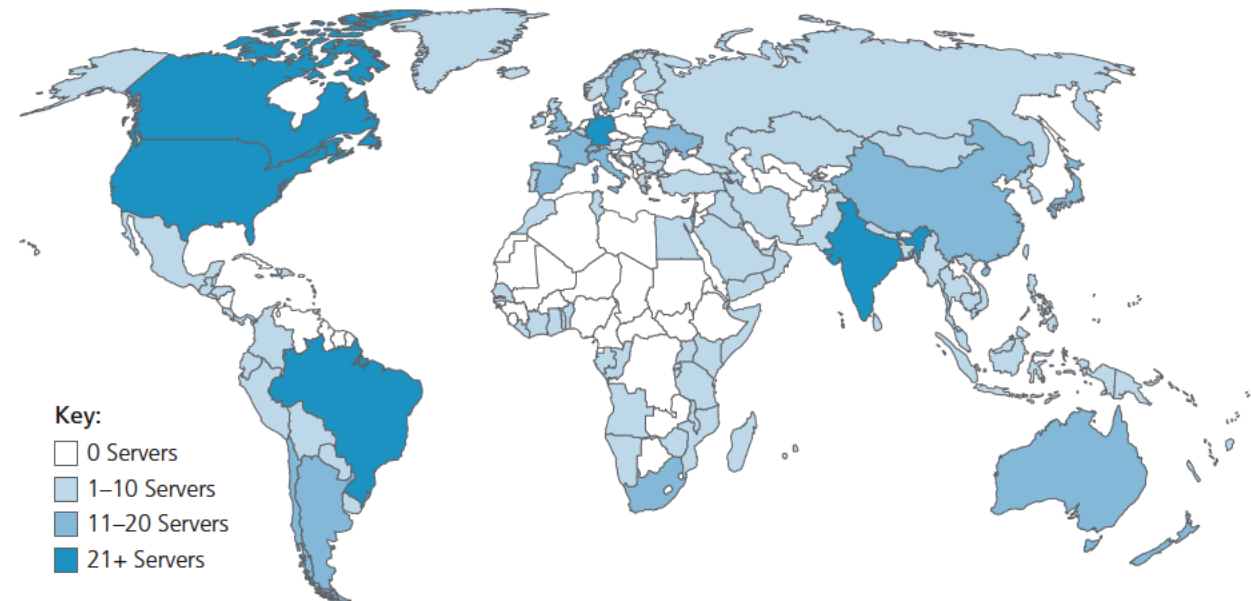




# Top-Level Domain, and authoritative servers

## Top-Level Domain (TLD) servers:

- responsible for .com, .org, .net, .edu, .aero, .jobs, .museums, and all top-level country domains, e.g.: .cn, .uk, .fr, .ca, .jp
- Network Solutions: authoritative registry for .com, .net TLD
- Educause: .edu TLD

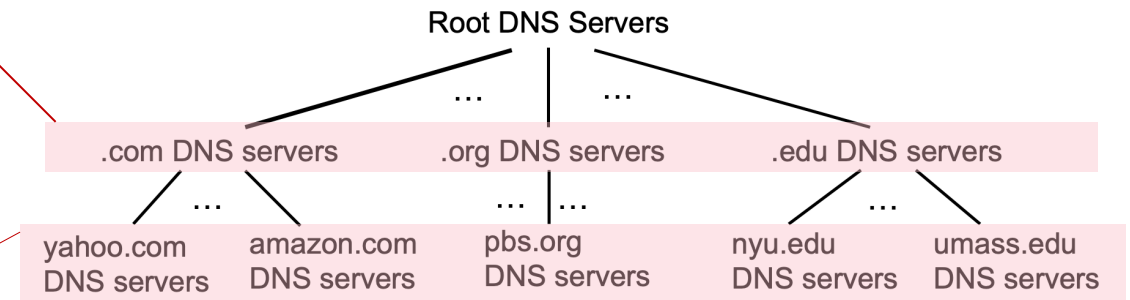

## authoritative DNS servers:

- organization's own DNS server(s), providing authoritative hostname to IP mappings for organization's named hosts
- can be maintained by organization or service provider

# Local DNS name servers


- when host makes DNS query, it is sent to its *local* DNS server
  - Local DNS server returns reply, answering:
    - from its local cache of recent name-to-address translation pairs (possibly out of date!)
    - forwarding request into DNS hierarchy for resolution
  - each ISP has local DNS name server; to find yours:
    - MacOS: `% scutil --dns`
    - Windows: `>ipconfig /all`
- local DNS server doesn't strictly belong to hierarchy

# DNS name resolution: iterated query

**Example:** host at `engineering.nyu.edu` wants IP address for `gaia.cs.umass.edu`

## Iterated query:

- contacted server replies with name of server to contact
- “I don’t know this name, but ask this server”

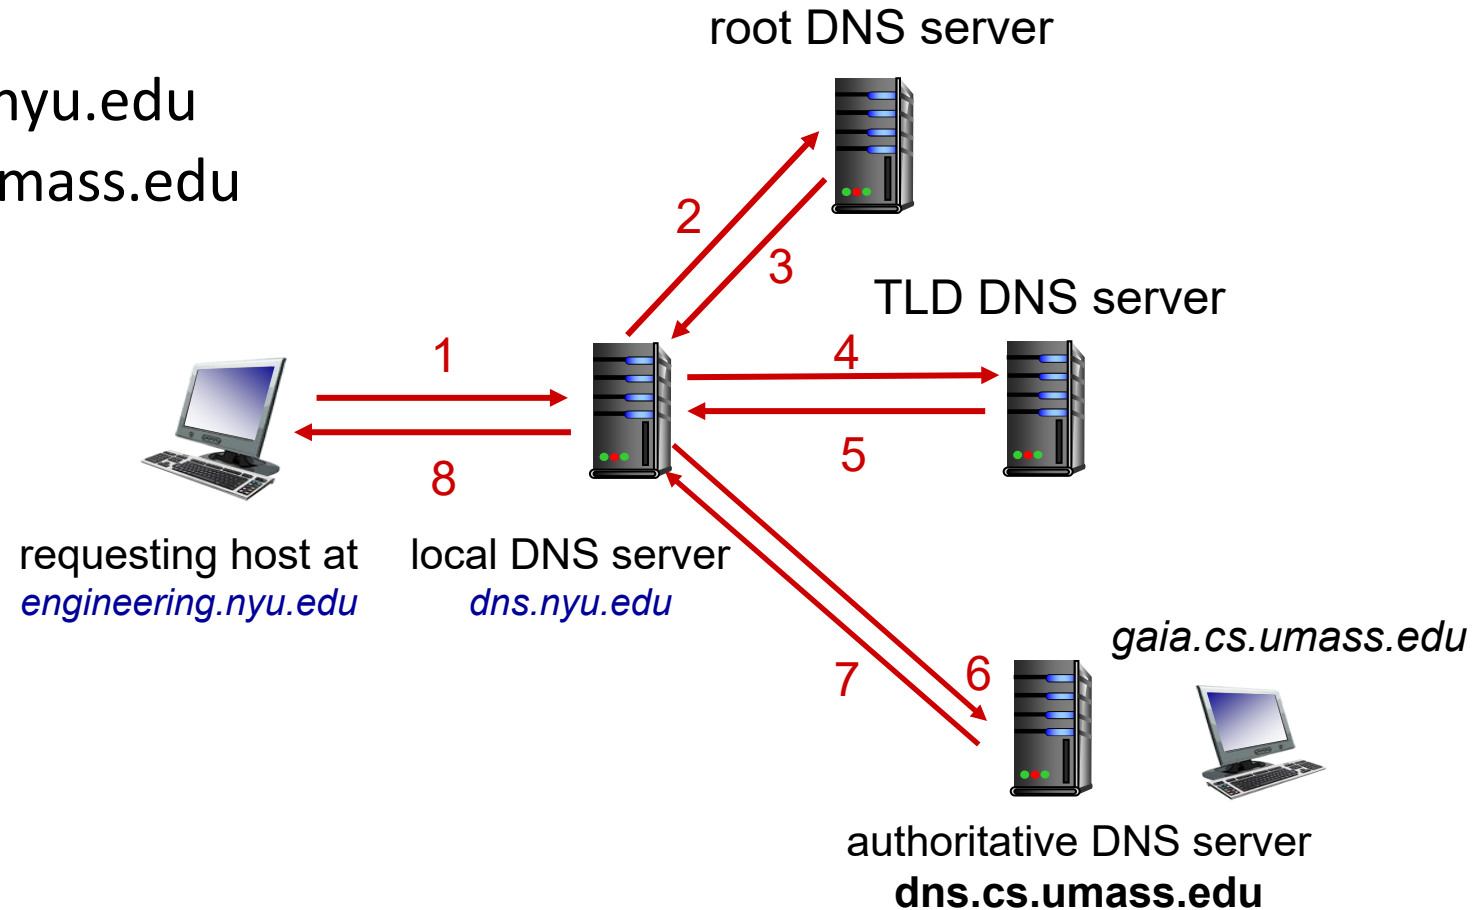


# DNS name resolution: recursive query

**Example:** host at `engineering.nyu.edu` wants IP address for `gaia.cs.umass.edu`

## Recursive query:

- puts burden of name resolution on contacted name server
- heavy load at upper levels of hierarchy?

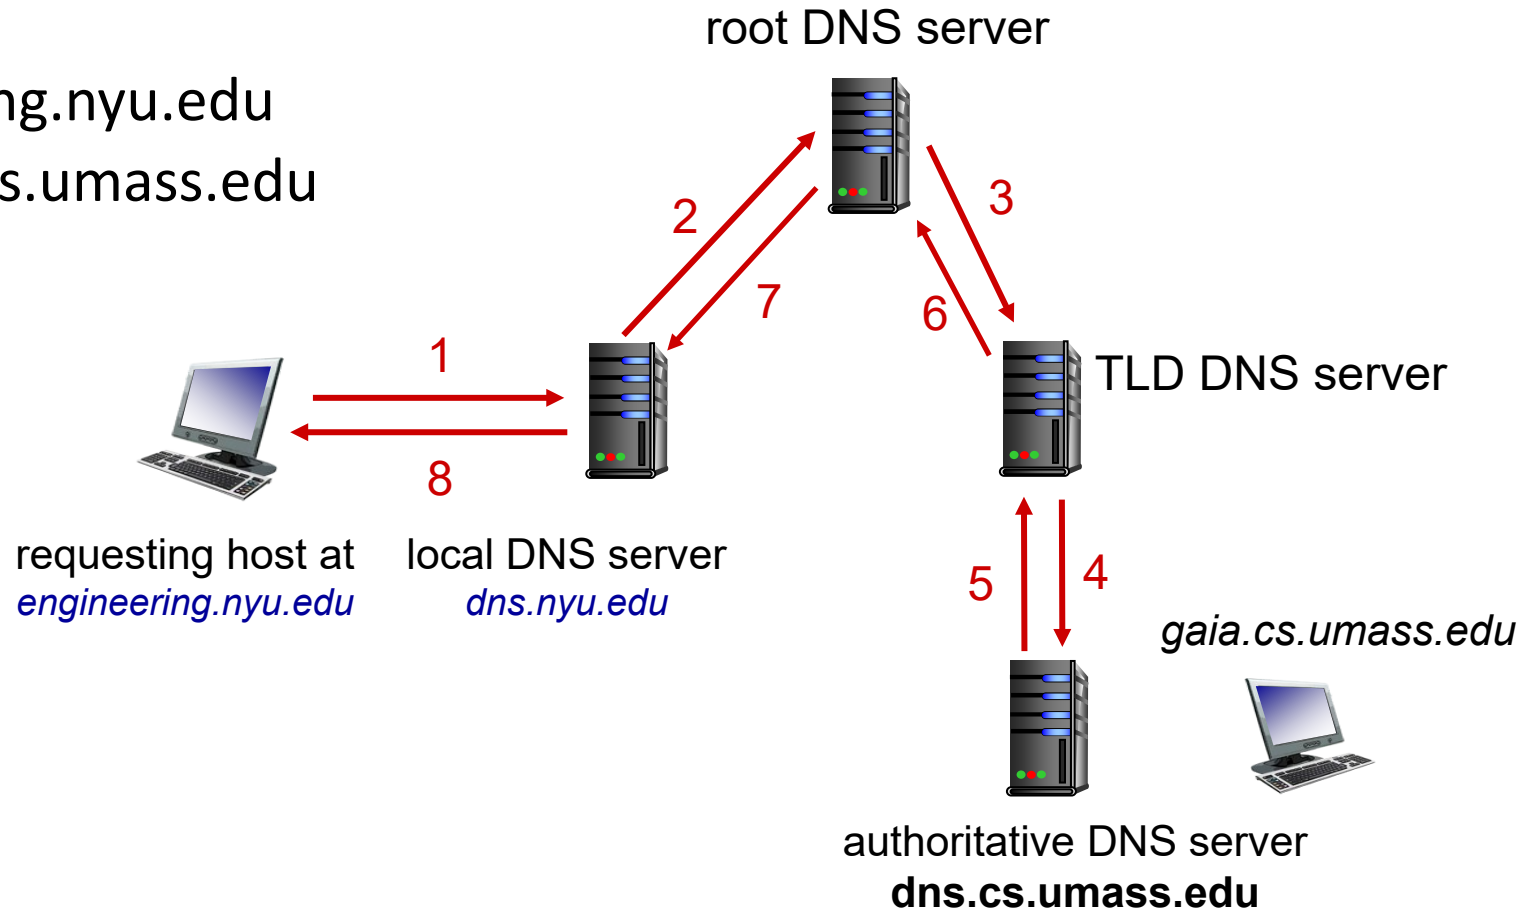

# Caching DNS Information

- once (any) name server learns mapping, it *cached* mapping, and *immediately* returns a cached mapping in response to a query
  - caching improves response time
  - cache entries timeout (disappear) after some time (TTL)
  - TLD servers typically cached in local name servers
- cached entries may be *out-of-date*
  - if named host changes IP address, may not be known Internet-wide until all TTLs expire!
  - *best-effort name-to-address translation!*

# DNS records

**DNS:** distributed database storing resource records (RR)

RR format: (name, value, type, ttl)

## type=A

- name is hostname
- value is IP address

## type=NS

- name is domain (e.g., foo.com)
- value is hostname of authoritative name server for this domain

## type=CNAME

- name is alias name for some “canonical” (the real) name
- www.ibm.com is really servereast.backup2.ibm.com
- value is canonical name

## type=MX


- value is name of SMTP mail server associated with name

# DNS protocol messages

DNS *query* and *reply* messages, both have same *format*:

message header:

- **identification**: 16 bit # for query, reply to query uses same #
- **flags**:
  - query or reply
  - recursion desired
  - recursion available
  - reply is authoritative

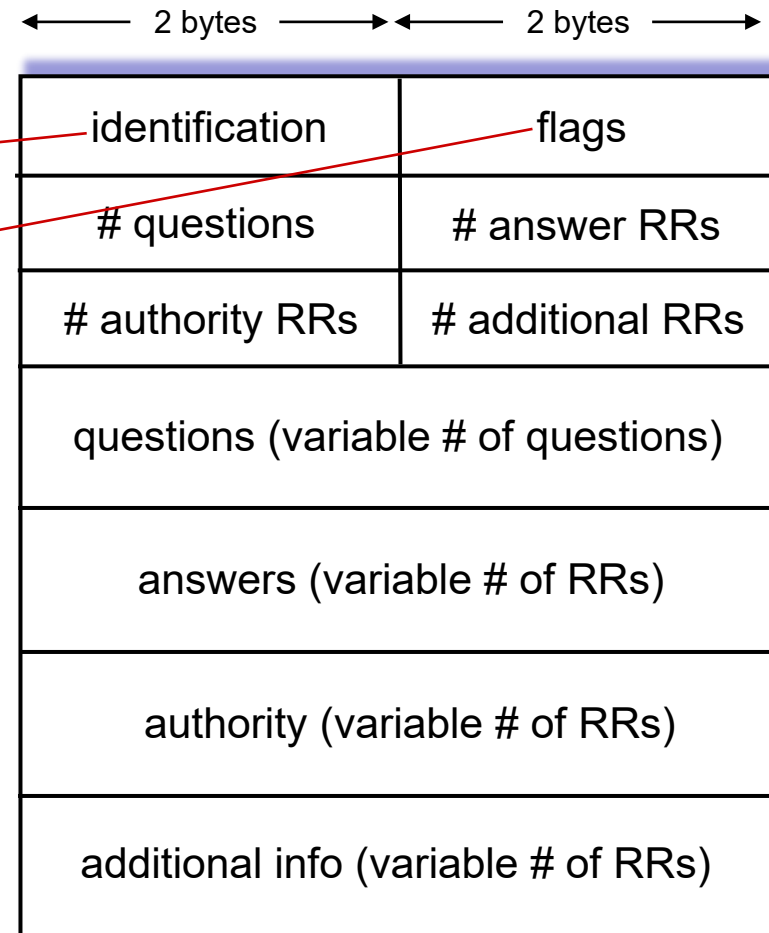

# DNS protocol messages

DNS *query* and *reply* messages, both have same *format*:

← 2 bytes → ← 2 bytes →

identification	flags
# questions	# answer RRs
# authority RRs	# additional RRs
questions (variable # of questions)	
answers (variable # of RRs)	
authority (variable # of RRs)	
additional info (variable # of RRs)	

name, type fields for a query

RRs in response to query

records for authoritative servers

additional “helpful” info that may  
be used



# Getting your info into the DNS

example: new startup “Network Utopia”

- register name networkutopia.com at *DNS registrar* (e.g., Network Solutions)
  - provide names, IP addresses of authoritative name server (primary and secondary)
  - registrar inserts NS, A RRs into .com TLD server:  
`(networkutopia.com, dns1.networkutopia.com, NS)`  
`(dns1.networkutopia.com, 212.212.212.1, A)`
- create authoritative server locally with IP address `212.212.212.1`
  - type A record for `www.networkutopia.com`
  - type MX record for `networkutopia.com`

# DNS security

## DDoS attacks

- bombard root servers with traffic
  - not successful to date
  - traffic filtering
  - local DNS servers cache IPs of TLD servers, allowing root server bypass
- bombard TLD servers
  - potentially more dangerous

## Spoofing attacks

- intercept DNS queries, returning bogus replies
  - DNS cache poisoning
  - RFC 4033: DNSSEC authentication services


# Application layer: overview

- Principles of network applications
- Web and HTTP
- The Domain Name System DNS
- P2P applications
- video streaming and content distribution networks
- socket programming with UDP and TCP



# Peer-to-peer (P2P) architecture


- *no* always-on server
- arbitrary end systems directly communicate
- peers request service from other peers, provide service in return to other peers
  - *self scalability* – new peers bring new service capacity, and new service demands
- peers are intermittently connected and change IP addresses
  - complex management
- examples: P2P file sharing (BitTorrent), streaming (KanKan), VoIP (Skype)

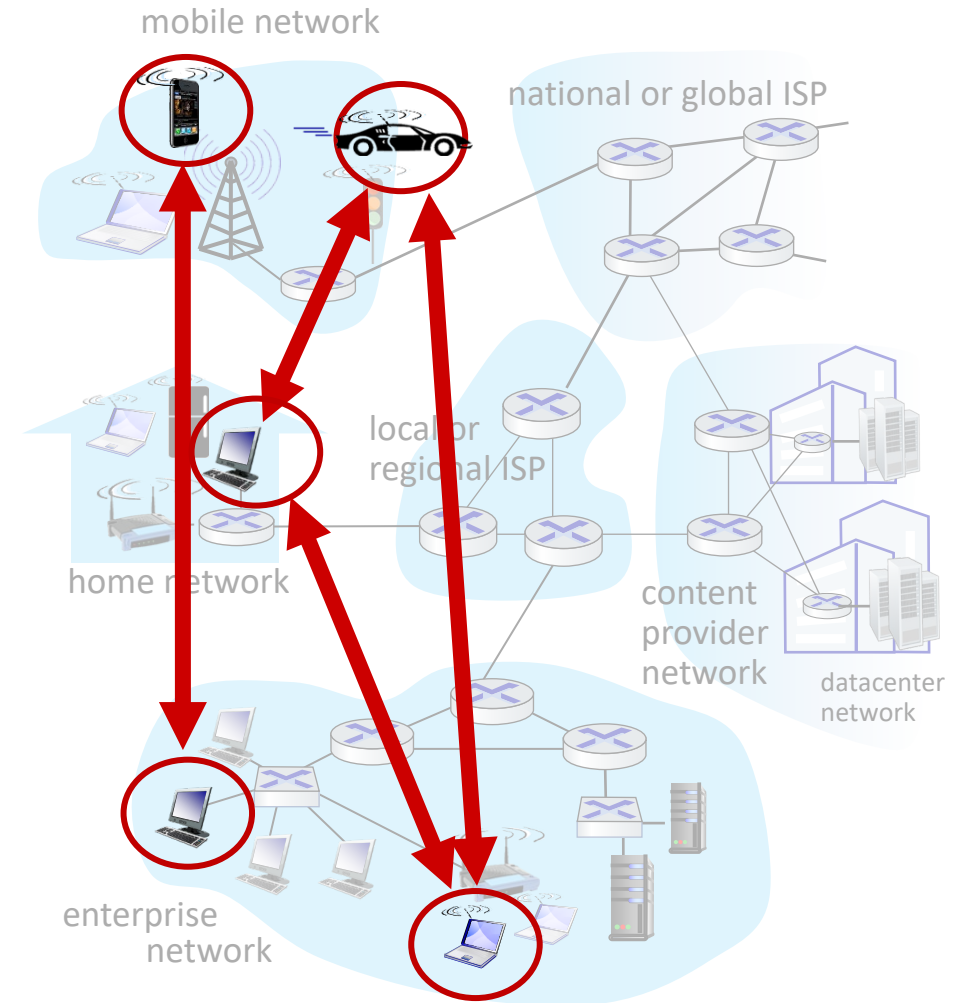

# File distribution: client-server vs P2P


Q: how much time to distribute file (size  $F$ ) from one server to  $N$  peers?

- peer upload/download capacity is limited resource

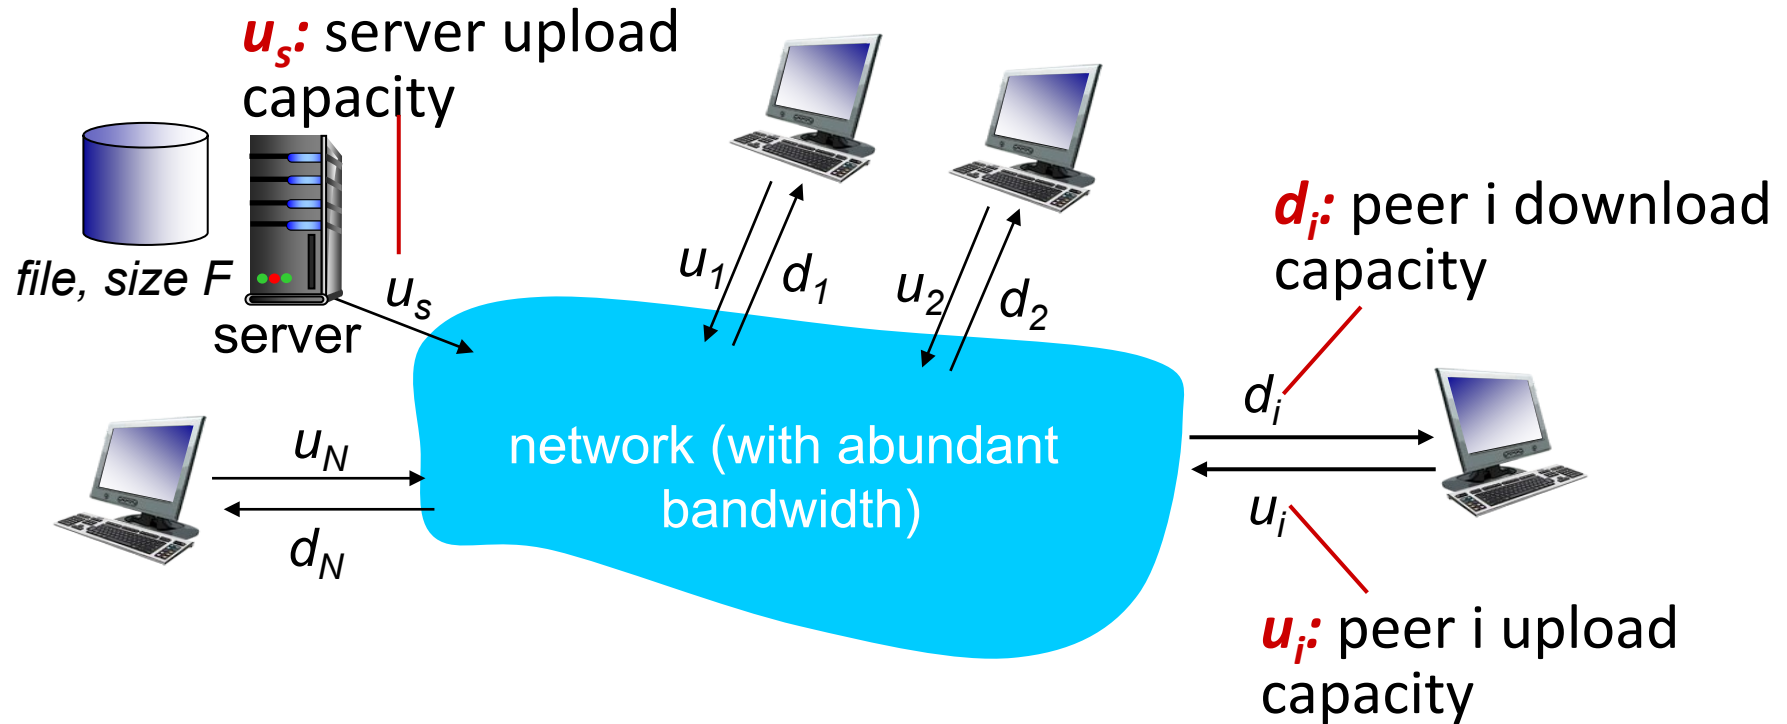

# File distribution time: client-server

- **server transmission:** must sequentially send (upload)  $N$  file copies:
  - time to send one copy:  $F/u_s$
  - time to send  $N$  copies:  $NF/u_s$
- **client:** each client must download file copy
  - $d_{min}$  = min client download rate
  - min client download time:  $F/d_{min}$

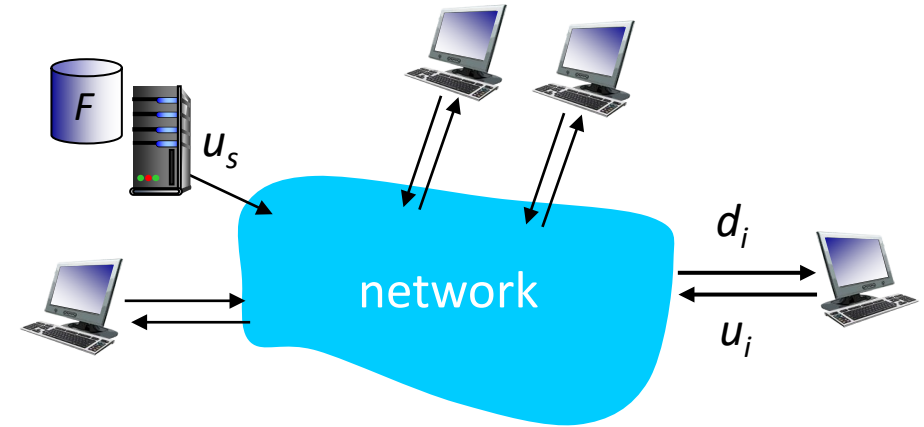


*time to distribute  $F$   
to  $N$  clients using  
client-server approach*

$$D_{c-s} \geq \max\{NF/u_s, F/d_{min}\}$$

increases linearly in  $N$

# File distribution time: P2P

- **server transmission:** must upload at least one copy:
  - time to send one copy:  $F/u_s$
- **client:** each client must download file copy
  - min client download time:  $F/d_{min}$
- **clients:** as aggregate must download  $NF$  bits
  - max upload rate (limiting max download rate) is  $u_s + \sum u_i$

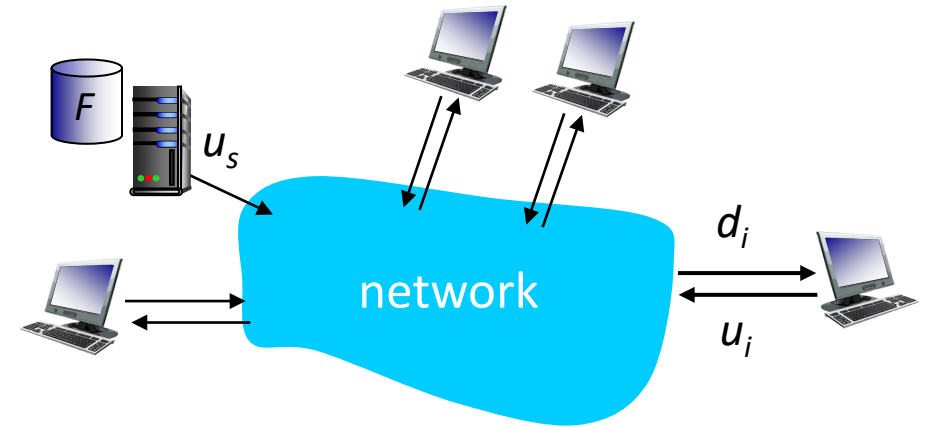


time to distribute  $F$   
to  $N$  clients using  
P2P approach

$$D_{P2P} \geq \max\{F/u_s, F/d_{min}, NF/(u_s + \sum u_i)\}$$

increases linearly in  $N$  ...  
... but so does this, as each peer brings service capacity

# Client-server vs. P2P: example

client upload rate =  $u$ ,  $F/u = 1$  hour,  $u_s = 10u$ ,  $d_{min} \geq u_s$

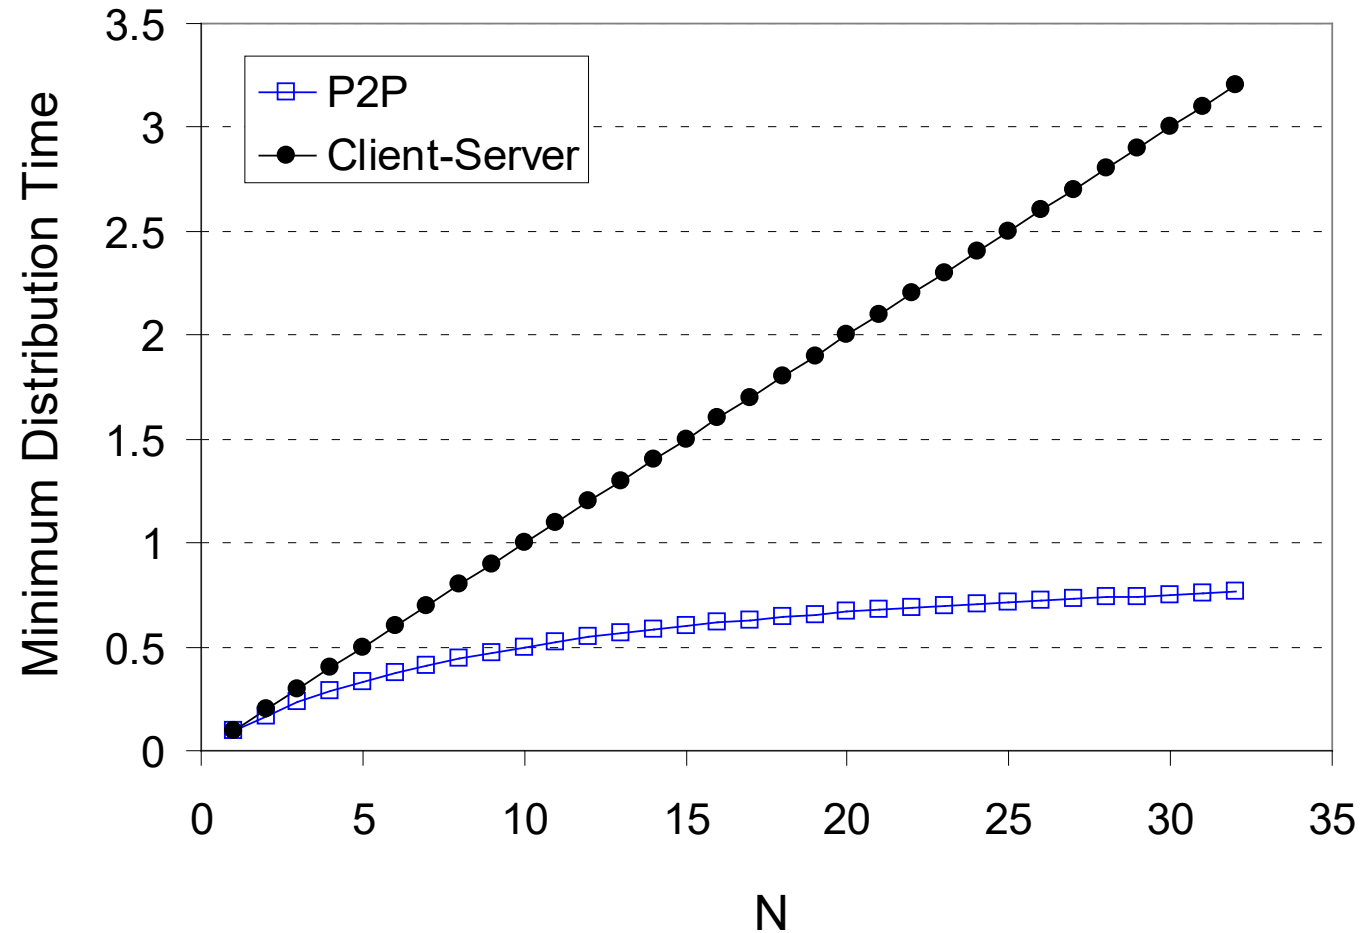




# P2P file distribution: BitTorrent

- file divided into 256Kb chunks
- peers in torrent send/receive file chunks


*tracker*: tracks peers  
participating in torrent

*torrent*: group of peers  
exchanging chunks of a file

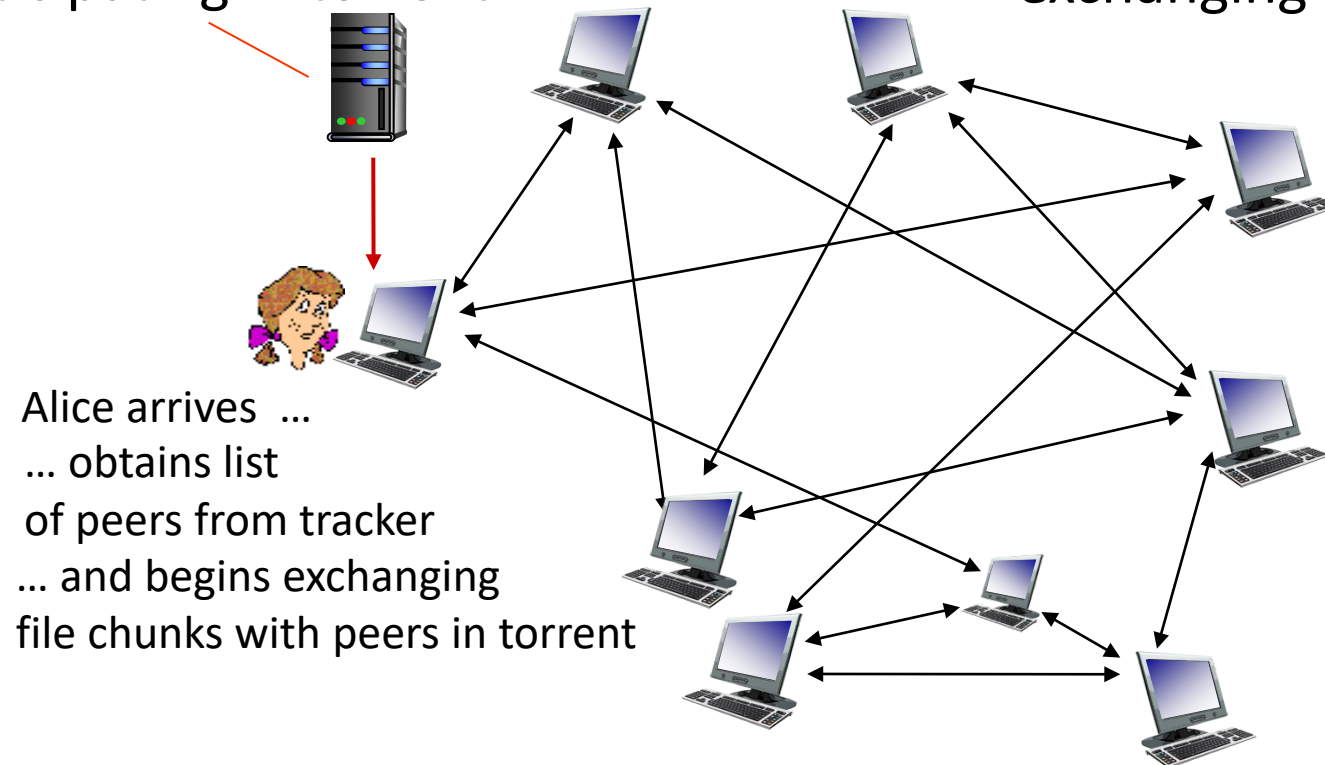

# P2P file distribution: BitTorrent

- peer joining torrent:
  - has no chunks, but will accumulate them over time from other peers
  - registers with tracker to get list of peers, connects to subset of peers (“neighbors”)
- while downloading, peer uploads chunks to other peers
- peer may change peers with whom it exchanges chunks
- *churn*: peers may come and go
- once peer has entire file, it may (selfishly) leave or (altruistically) remain in torrent

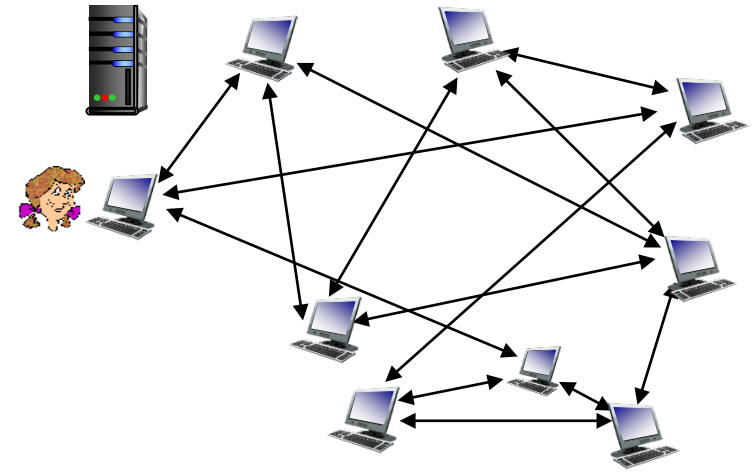

# BitTorrent: requesting, sending file chunks

## Requesting chunks:


- at any given time, different peers have different subsets of file chunks
- periodically, Alice asks each peer for list of chunks that they have
- Alice requests missing chunks from peers, rarest first

## Sending chunks: tit-for-tat

- Alice sends chunks to those four peers currently sending her chunks *at highest rate*
  - other peers are choked by Alice (do not receive chunks from her)
  - re-evaluate top 4 every 10 secs
- every 30 secs: randomly select another peer, starts sending chunks
  - “optimistically unchoke” this peer
  - newly chosen peer may join top 4

# BitTorrent: tit-for-tat

- (1) Alice “optimistically unchokes” Bob
- (2) Alice becomes one of Bob’s top-four providers; Bob reciprocates
- (3) Bob becomes one of Alice’s top-four providers

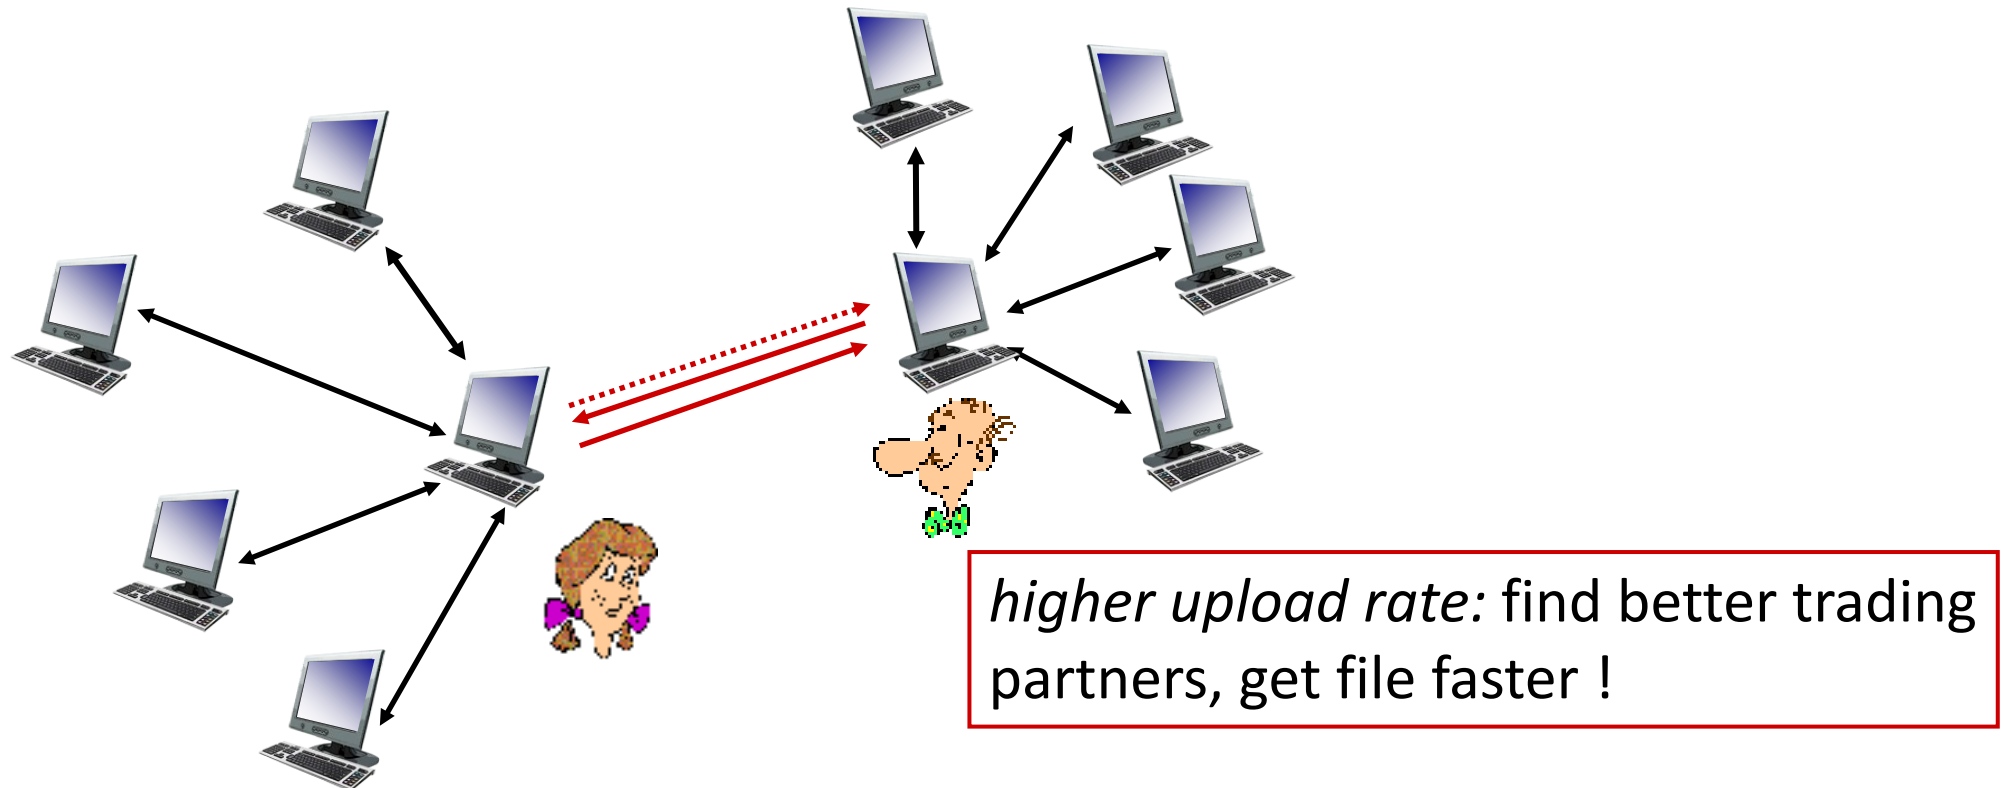

# Application layer: overview

- Principles of network applications
- Web and HTTP
- The Domain Name System DNS
- P2P applications
- video streaming and content distribution networks
- socket programming with UDP and TCP



# Video Streaming and CDNs: context


- stream video traffic: major consumer of Internet bandwidth
  - Netflix, YouTube, Amazon Prime: 80% of residential ISP traffic (2020)
- *challenge*: scale - how to reach ~1B users?
- *challenge*: heterogeneity
  - different users have different capabilities (e.g., wired versus mobile; bandwidth rich versus bandwidth poor)
- *solution*: distributed, application-level infrastructure



# Multimedia: video

- video: sequence of images displayed at constant rate
  - e.g., 24 images/sec
- digital image: array of pixels
  - each pixel represented by bits
- coding: use redundancy *within* and *between* images to decrease # bits used to encode image
  - spatial (within image)
  - temporal (from one image to next)

*spatial coding example:* instead of sending  $N$  values of same color (all purple), send only two values: color value (*purple*) and number of repeated values ( $N$ )

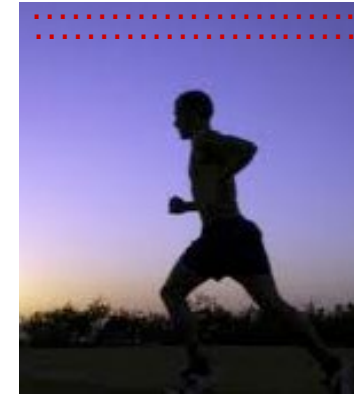

frame  $i$

*temporal coding example:* instead of sending complete frame at  $i+1$ , send only differences from frame  $i$




frame  $i+1$

# Multimedia: video

- **CBR: (constant bit rate):** video encoding rate fixed
- **VBR: (variable bit rate):** video encoding rate changes as amount of spatial, temporal coding changes
- **examples:**
  - MPEG 1 (CD-ROM) 1.5 Mbps
  - MPEG2 (DVD) 3-6 Mbps
  - MPEG4 (often used in Internet, 64Kbps – 12 Mbps)

*spatial coding example:* instead of sending  $N$  values of same color (all purple), send only two values: color value (*purple*) and number of repeated values ( $N$ )

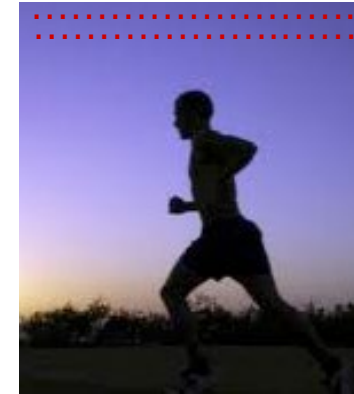

frame  $i$

*temporal coding example:* instead of sending complete frame at  $i+1$ , send only differences from frame  $i$




frame  $i+1$



# Streaming stored video


simple scenario:

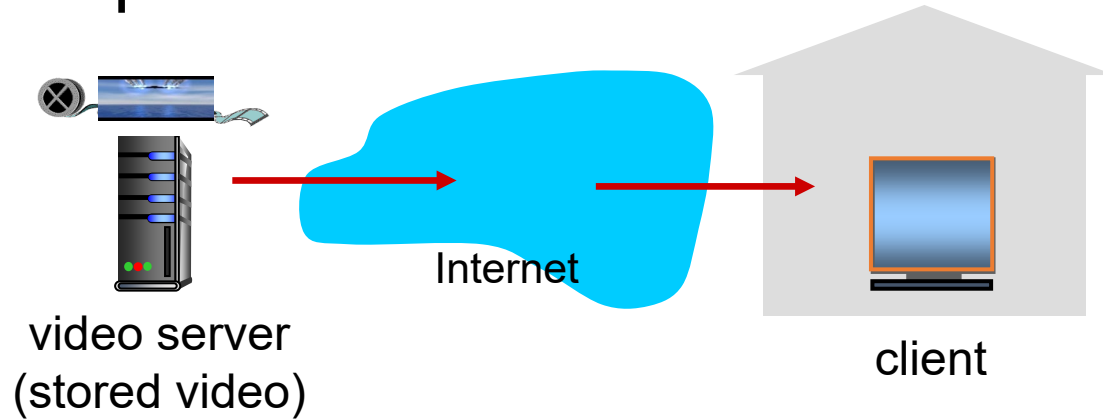

Main challenges:


- server-to-client bandwidth will *vary* over time, with changing network congestion levels (in house, access network, network core, video server)
- packet loss, delay due to congestion will delay playout, or result in poor video quality

# Streaming stored video

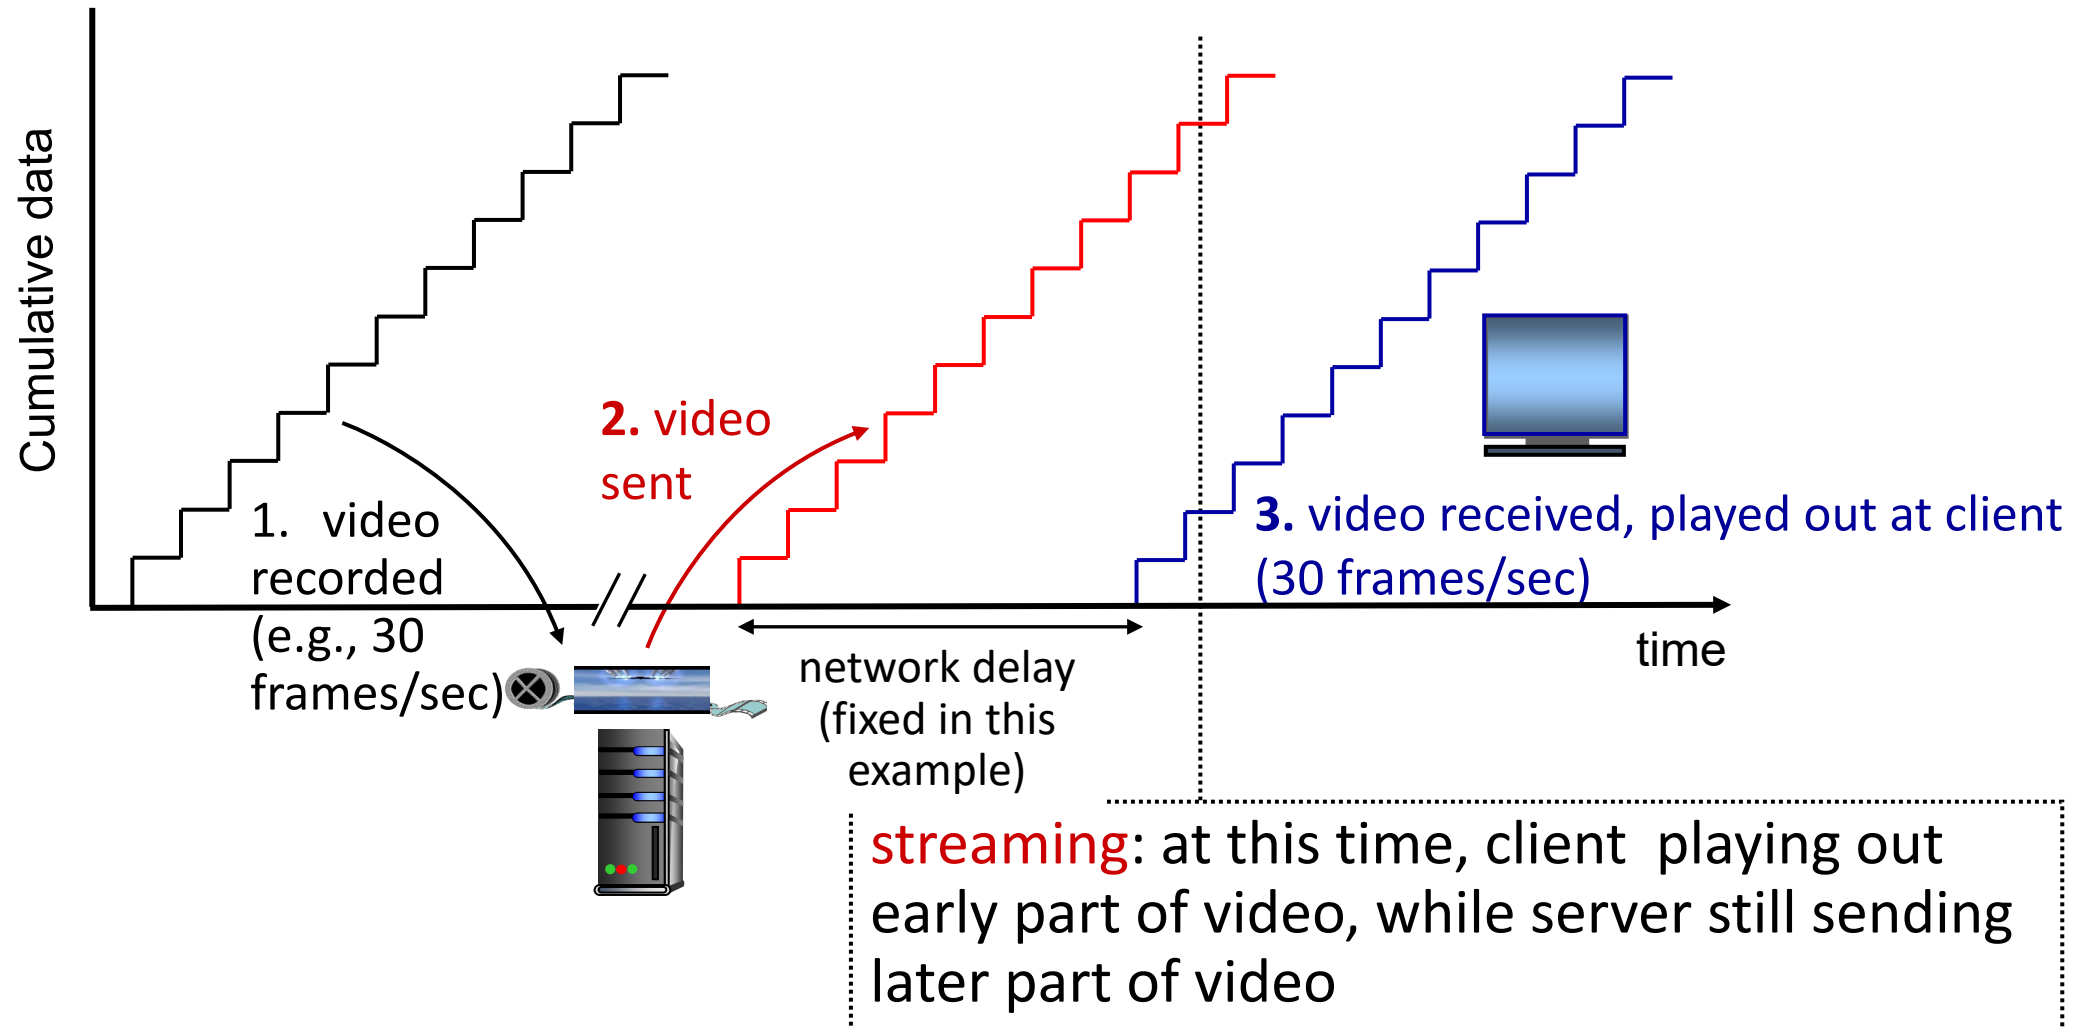


# Streaming stored video: challenges

- **continuous playout constraint**: during client video playout, playout timing must match original timing
  - ... but **network delays are variable** (jitter), so will need **client-side buffer** to match continuous playout constraint
- other challenges:
  - client interactivity: pause, fast-forward, rewind, jump through video
  - video packets may be lost, retransmitted

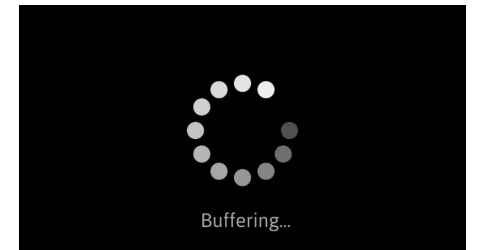

# Streaming stored video: playout buffering

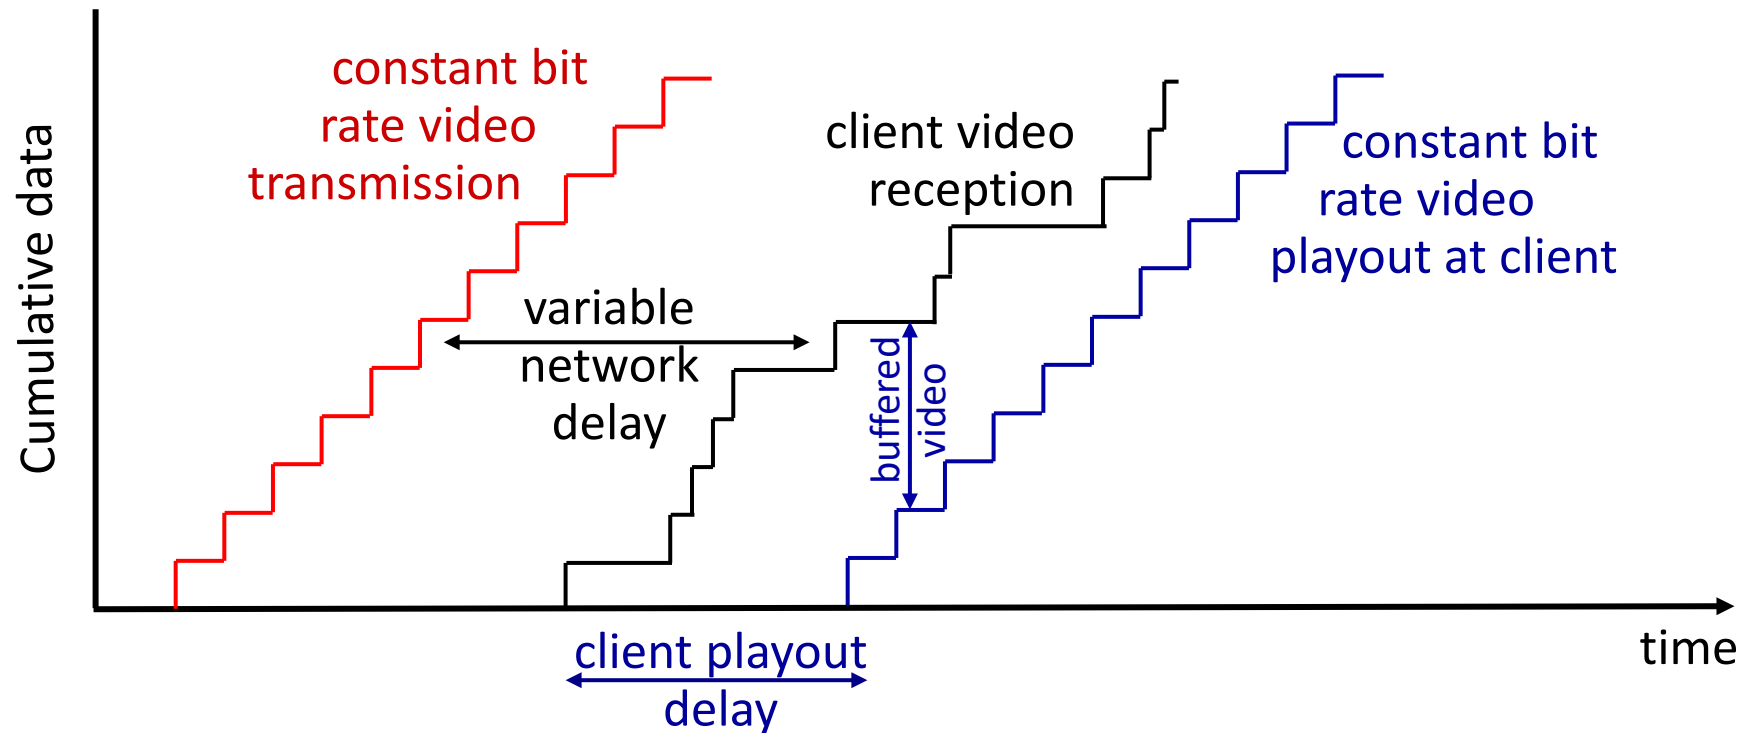


- *client-side buffering and playout delay*: compensate for network-added delay, delay jitter

# Streaming multimedia: DASH

*D*ynamic, *A*daptive  
*S*teaming over *H*TTP

## server:

- divides video file into multiple chunks
- each chunk encoded at multiple different rates
- different rate encodings stored in different files
- files replicated in various CDN nodes
- *manifest file*: provides URLs for different chunks

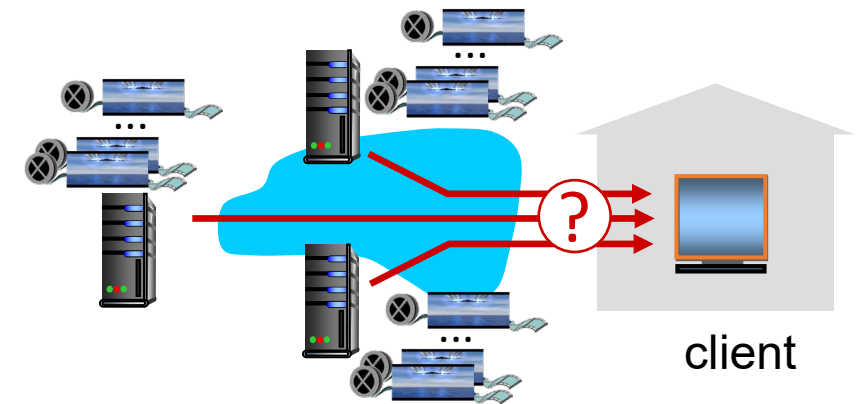


## client:

- periodically estimates server-to-client bandwidth
- consulting manifest, requests one chunk at a time
  - chooses maximum coding rate sustainable given current bandwidth
  - can choose different coding rates at different points in time (depending on available bandwidth at time), and from different servers

# Streaming multimedia: DASH

- “*intelligence*” at client: client determines
  - *when* to request chunk (so that buffer starvation, or overflow does not occur)
  - *what encoding rate* to request (higher quality when more bandwidth available)
  - *where* to request chunk (can request from URL server that is “close” to client or has high available bandwidth)

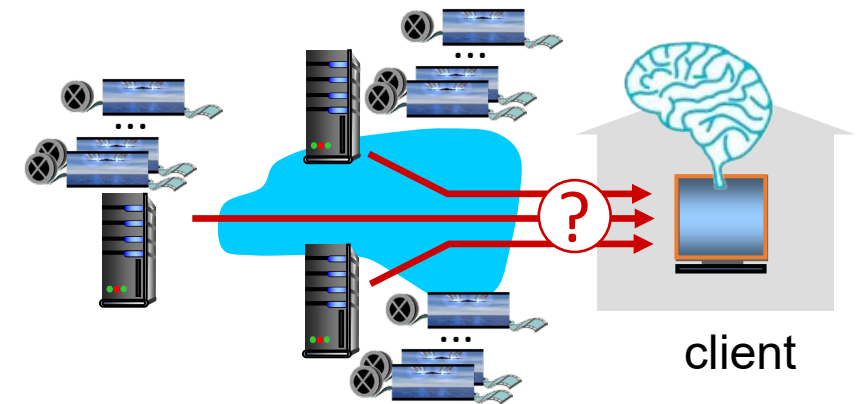

Streaming video = encoding + DASH + playout buffering

# Content distribution networks (CDNs)

*challenge:* how to stream content (selected from millions of videos) to hundreds of thousands of *simultaneous* users?

- *option 1:* single, large “mega-server”
  - single point of failure
  - point of network congestion
  - long (and possibly congested) path to distant clients

....quite simply: this solution *doesn't scale*

# Content distribution networks (CDNs)

*challenge:* how to stream content (selected from millions of videos) to hundreds of thousands of *simultaneous* users?


- *option 2:* store/serve multiple copies of videos at multiple geographically distributed sites (*CDN*)
  - *enter deep:* push CDN servers deep into many access networks
    - close to users
    - Akamai: 240,000 servers deployed in > 120 countries (2015)
  - *bring home:* smaller number (10's) of larger clusters in POPs near access nets
    - used by Limelight





# Content distribution networks (CDNs)

- CDN: stores copies of content (e.g. MADMEN) at CDN nodes
- subscriber requests content, service provider returns manifest
  - using manifest, client retrieves content at highest supportable rate
  - may choose different rate or copy if network path congested

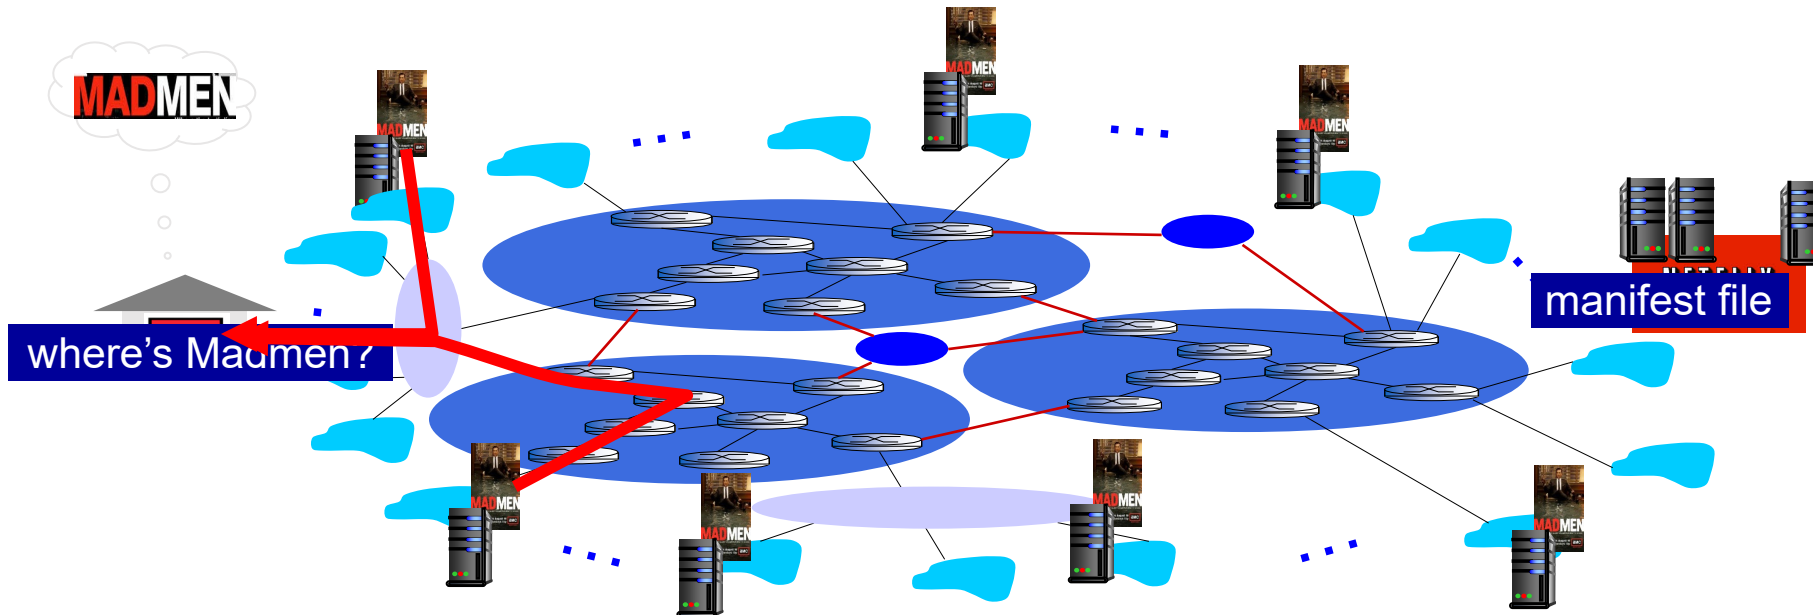

# Content distribution networks (CDNs)



*OTT challenges:* coping with a congested Internet from the “edge”

- what content to place in which CDN node?
- from which CDN node to retrieve content? At which rate?