



Asia

Taiwan Headquarters - Thermaltake Technology Co., Ltd.

5F, No. 185, Sec.2, Tiding Blvd., Neihu Dist.,
Taipei City 114, Taiwan
TEL: +886-2-8797-5788
FAX: +886-2-8797-8055
E-MAIL: info@thermaltake.com
WEBSITE: <http://www.thermaltake.com>

Thermaltake Capital Beijing Co., Ltd.

#907, HaiTai Plaza, No. 229, North 4th Ring Road,
Haidian District, Beijing, 100083, PRC
TEL: +86-10-8288-3159
FAX: +86-10-8288-3302
E-MAIL: ttchina@thermaltake.com.cn
WEBSITE: <http://www.thermaltake.com.cn>

Americas

Thermaltake USA Inc.

20420 Business Parkway, City of Industry, CA, 91789 USA
TEL: +1626-968-9189
SUPPORT: +1800-988-1088
FAX: +1626-968-7659
E-MAIL: sales@thermaltakeusa.com
WEBSITE: <http://www.thermaltakeusa.com>

Australia

Thermaltake Australia and New Zealand Pty Ltd.

63-69 Ricketts Road Mount Waverley VIC 3149 Australia
TEL: +613 9131 9827
E-MAIL: sales@thermaltake.com.au
WEBSITE: <http://www.thermaltake.com.au>

Europe

Thermaltake Germany GmbH

Oststraße 1C, 22844 Norderstedt, Germany
TEL: +49(0)40/30-85-86-0
FAX: +49(0)40/30-85-86-89
E-MAIL: info@thermaltake.de
WEBSITE: <http://de.thermaltake.com>

Thermaltake Russia Representative Office

Office 404, bld. 40/22, Nikoloyamskaya Str.,
Moscow 109004, Russia
TEL: +7(916) 726- 2888
E-MAIL: info@thermaltakerussia.ru
WEBSITE: <http://ru.thermaltake.com>

FAN COLLECTION



TT Premium

To continue achieving the corporate mission of delivering the perfect user experience, Thermaltake developed “TT Premium” with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermaltake’s desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast.

Contents:

High Static Pressure Fans	01
TT RGB Plus Controlled Fans	05
TT RGB Plus	07
NeonMaker	07,14
ARGB Sync Controlled Fans	15
Standard Fans	19

High Static Pressure Fans

Powerful and Noiseless


Thermaltake's TOUGHFAN series is our first high-speed high static pressure fans, which includes the latest TOUGHFAN 12 Turbo, TOUGHFAN 12, and TOUGHFAN 14. With high-quality metallic charcoal design, the TOUGHFAN series fans will definitely boost the look of your pc build.



Common Features for the TOUGHFAN


2nd Generation Hydraulic Bearings

Incorporating a new shaft design with inside etches allowing preservation of lubricant on both sides whilst reducing noise during operation. Lowering audible levels and extending lifespan.

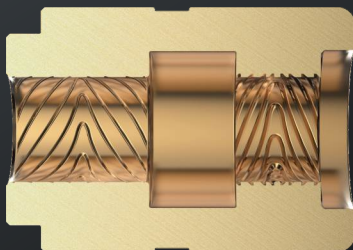

Metal-Reinforced Motor Hub

The TOUGHFAN's center is constructed with a full steel motor hub providing enhanced stability and durability.

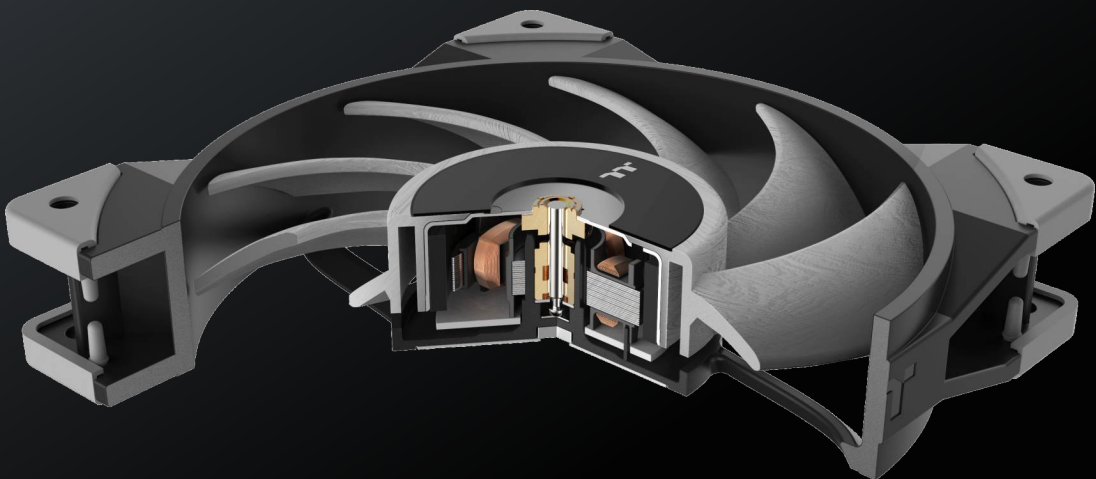


Exceptional Blade Design

Featuring high tensile strength and low thermal expansion coefficient materials, the fan blade is built with special liquid crystal polymer (LCP), a compound which minimizes vibration when the fan is operating at full speed.

TOUGHFAN
500 ~2000 RPM



TOUGHFAN Turbo
500 ~2500 RPM

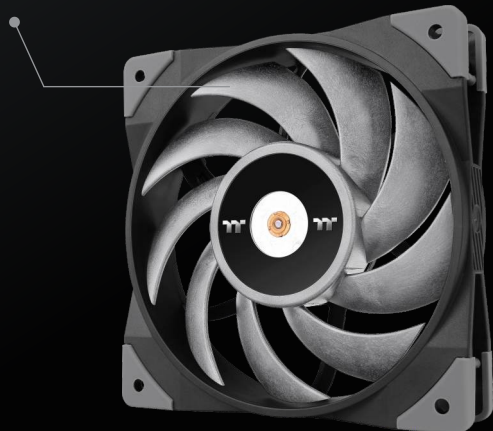

Model	TOUGHFAN		TOUGHFAN Turbo
P/N	CL-F117-PL12BL-A CL-F082-PL12BL-A	CL-F118-PL14BL-A CL-F085-PL14BL-A	CL-F121-PL12GM-A
Size(mm)	120 x 120 x 25	140 x 140 x 25	120 x 120 x 25
Max Airflow (CFM)	58.35	119.1	72.69
Max Static Pressure(mm-H2O)	2.41	3.54	3.78
Max Noise Level (dBA)	22.3	33.2	28.1
Speed(R.P.M)	500-2000	500-2000	500-2500
PWM Support	V	V	V
Connector	4 PIN PWM	4 PIN PWM	4 PIN PWM
Software Support	X	X	X


TT RGB Plus Controlled Fans



TT RGB Plus Controlled Fans are different series compared to the 1st Generation hydraulic bearing fans that associate with different software that Thermaltake had developed. The TT RGB Plus are all part of Thermaltake's TT RGB Plus Ecosystem, allowing users to connect all their TT RGB Plus Fans with other ecosystem products.


* NeonMaker currently only supports Riing Quad and Riing Trio
ARTT currently only supports Riing Quad



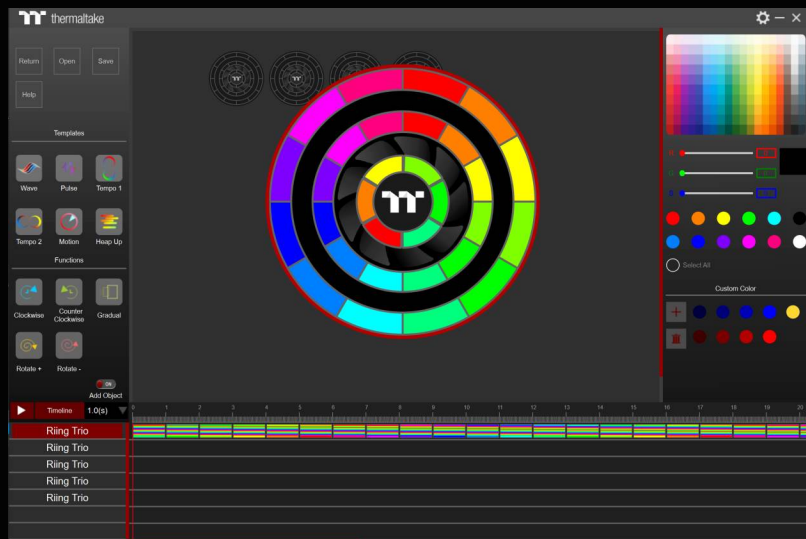

NeonMaker Software

NeonMaker is Thermaltake's latest light editing software currently supporting both Riing Quad and Riing Trio, allowing users to edit their lighting effects as they wish, creating the best light show you can showoff on your PC. For more information, please visit: <https://www.thermaltake.com/neonmaker>

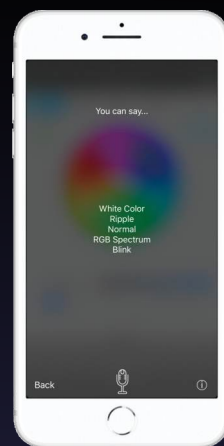


TT RGB Plus Software

Monitor the fan performance, adjust the fan speeds, and customize the lighting effects for Thermaltake Plus RGB liquid cooling products with the patented TT RGB PLUS Software and an exclusively designed mobile app. TT RGB Plus 2.0 will be available for download in the second half of 2021.



LED Rings

TT RGB Plus Controlled Fans are all equipped with high lumen addressable LEDs, guarantee users to get the best lighting effects associating with our lighting software. With Riing Quad having 54 LEDs, and Riing Trio 20 having 60 LEDs, the TT RGB Plus Controlled Fans can surely fulfill the needs of RGB enthusiasts.

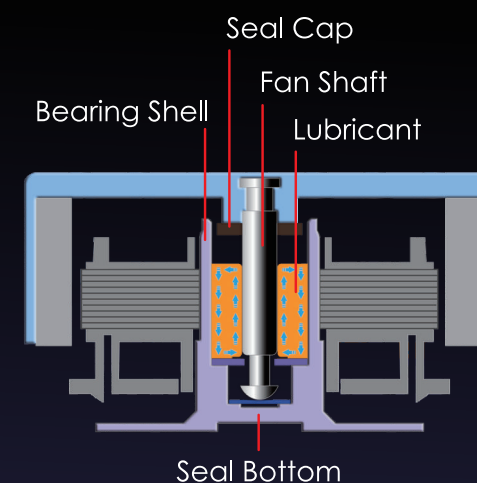

1st Generation Hydraulic Bearings

The hydraulic bearing self-lubricates with a high-quality, friction-reducing substance, which lowers operation noise while improving thermal efficiency. The seal cap prevents lubricant leakage and extends the lifespan of the unit.

1st Riing 18 LEDs

2nd Riing 18 LEDs

3rd Riing 9 LEDs

4th Riing 9 LEDs



NEW

1st Riing 12 LEDs

2nd Riing 12 LEDs

3rd Riing 6 LEDs



Model	Riing Quad RGB	
LED Rings	4	
LEDs	54	
P/N	CL-F088-PL12SW-A CL-F088-PL12SW-C CL-F100-PL12SW-A CL-F100-PL12SW-C	CL-F089-PL14SW-A CL-F089-PL14SW-C CL-F101-PL14SW-A CL-F101-PL14SW-C
Size(mm)	120 x 120 x 25	140 x 140 x 25
Max Airflow(CFM)	40.9	60.17
Max Static Pressure(mm-H2O)	1.4	1.71
Max Noise Level (dBA)	25	26.1
Speed(R.P.M)	500-1500	500-1400
Connector	USB 2.0 connector (9 pin)	
PWM Support	V	
Neonmaker Support	V	
TT RGB Plus Support	V	
ARTT Support	V	
Amazon Alexa Support	V	
RAZER CHROMA Support	V	

Model	Riing Trio RGB		
LED Rings	3		
LEDs	30		60
P/N	CL-F072-PL12SW-A CL-F126-PL12SW-A	CL-F077-PL14SW-A	CL-F077-PL14SW-A
Size(mm)	120 x 120 x 25	140 x 140 x 25	200 x 200 x 30
Max Airflow(CFM)	41.13	60.68	123.53
Max Static Pressure(mm-H2O)	1.4	1.72	1.71
Max Noise Level (dBA)	25.2	26.5	28
Speed(R.P.M)	500-1500	500-1400	500-1000
Connector	USB 2.0 connector (9 pin)		
PWM Support	V		
Neonmaker Support	V		
TT RGB Plus Support	V		
ARTT Support	X		
Amazon Alexa Support	V		
RAZER CHROMA Support	V		

1st Riing 12 LEDs

2nd Riing 6 LEDs



Model	Riing Duo RGB	
LED Rings	2	
LEDs	18	
P/N	CL-F073-PL12SW-A	CL-F078-PL14SW-A
Size(mm)	120 x 120 x 25	140 x 140 x 25
Max Airflow(CFM)	42.45	60.87
Max Static Pressure(mm-H2O)	1.45	1.74
Max Noise Level (dBA)	23.9	26.2
Speed(R.P.M)	500-1500	500-1400
Connector	USB 2.0 connector (9 pin)	
PWM Support	V	
Neonmaker Support	X	
TT RGB Plus Support	V	
ARTT Support	X	
Amazon Alexa Support	V	
RAZER CHROMA Support	V	

12 LEDs



Model	Riing Plus RGB		
LED Rings	1		
LEDs	12	24	
P/N	CL-F053-PL12SW-A CL-F054-PL12SW-A	CL-F056-PL14SW-A CL-F057-PL14SW-A	CL-F069-PL20SW-A CL-F070-PL20SW-A
Size(mm)	120 x 120 x 25	140 x 140 x 25	200 x 200 x 30
Max Airflow(CFM)	48.34	63.19	117.96
Max Static Pressure(mm-H2O)	1.54	1.53	1.68
Max Noise Level (dBA)	24.7	27.2	29.2
Speed(R.P.M)	500-1500	500-1400	500-1000
Connector	USB 2.0 connector (9 pin)		
PWM Support	V		
Neonmaker Support	X		
TT RGB Plus Support	V		
ARTT Support	X		
Amazon Alexa Support	V		
RAZER CHROMA Support	V		

9 LEDs



Model	Pure Plus RGB	
LED Rings	1	
LEDs	9	
P/N	CL-F063-PL12SW-A	CL-F064-PL14SW-A
Size(mm)	120 x 120 x 25	140 x 140 x 25
Max Airflow(CFM)	56.45	70.32
Max Static Pressure(mm-H2O)	1.59	1.62
Max Noise Level (dBA)	25.8	30.4
Speed(R.P.M)	500-1500	600-1500
Connector	USB 2.0 connector (9 pin)	
PWM Support	V	
Neonmaker Support	X	
TT RGB Plus Support	V	
ARTT Support	X	
Amazon Alexa Support	V	
RAZER CHROMA Support	V	



NeonMaker

NeonMaker is the new advanced editing software for RGB lighting customization. NeonMaker provides various stunning pre-set lighting effects, but also allows users to edit their lighting effects on every single LED light bulb, granting access to further customizable lighting options.




To download profiles, please visit:
<https://neonmaker.thermaltake.com/download.php>

ARGB Sync Controlled Fan



ARGB Sync Control Fans are 1st Generation hydraulic bearing fans that can synchronize with motherboards that have a 5V addressable RGB header, allowing users to control the lights directly from the above-mentioned software without installing any extra lighting software or controllers.



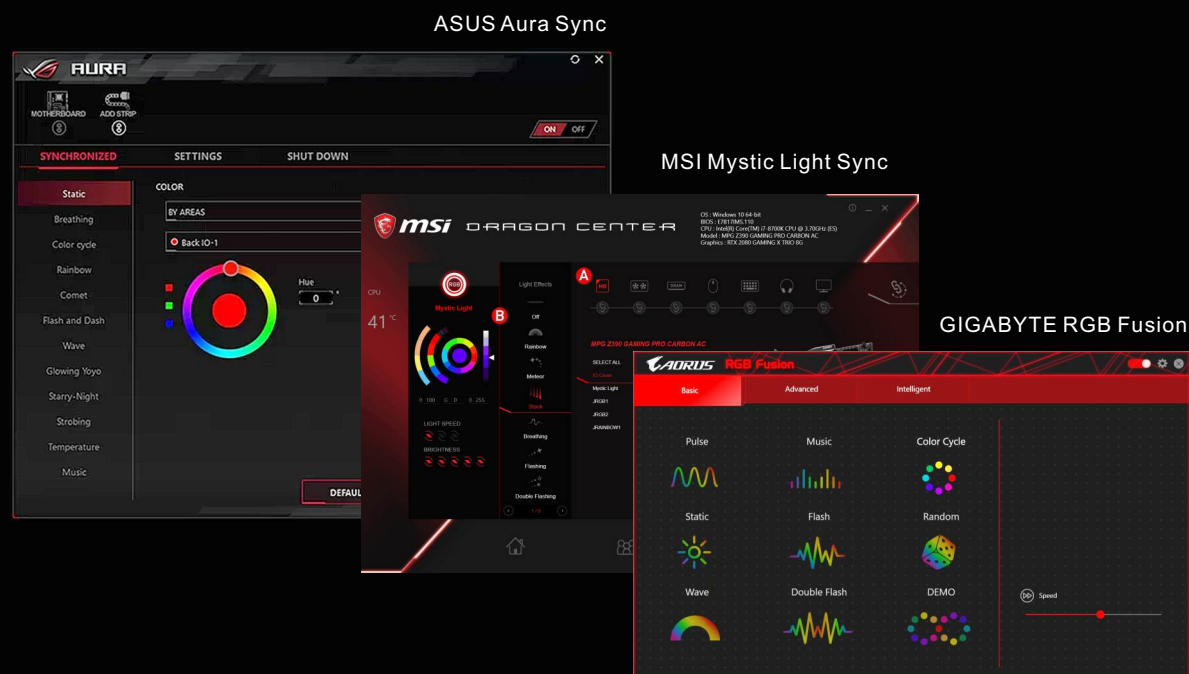


Synchronize with Motherboards

ARGB Sync Controlled Fans allow users to connect their fans with ASUS Aura Sync, GIGABYTE RGB Fusion, MSI Mystic Light Sync and ASRock Polychrome. It supports ASUS Aura Sync, MSI Mystic Light Sync, and GIGABYTE RGB Fusion, etc.



Switch Lighting with the Preset Controller

The controller comprises of 7 preset lighting modes: wave, full light, RGB spectrum, flow, ripple, pulse and blink modes, users may switch modes, colors, and lighting speeds with the controller.

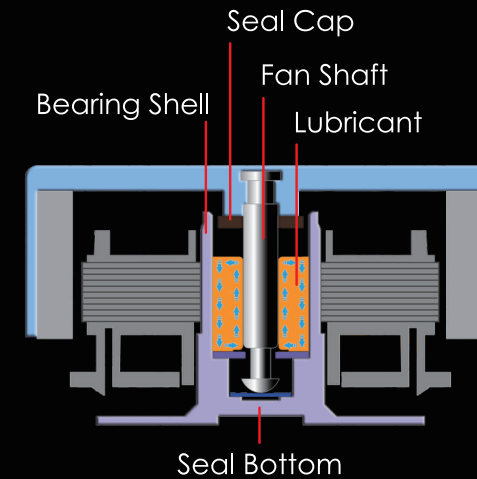

1st Generation Hydraulic Bearing

The hydraulic bearing self-lubricates with a high-quality, friction-reducing substance, which lowers operation noise while improving thermal efficiency. The seal cap prevents lubricant leakage and extends the lifespan of the unit.



LED Lighting

ARGB Sync Controlled Fans are all equipped with high lumen addressable LEDs, which guarantees users to obtain the best lighting effects associating with our lighting software. With Pure Duo having 18 LEDs in two rings and Pure ARGB with 9 LEDs, users can enjoy RGB lighting with motherboard associated software.

1st Riing 9 LEDs
2nd Riing 9 LEDs



NEW

9 LEDs




Model	Pure Duo ARGB	
LED Rings	2	
LEDs	18	
P/N	CL-F097-PL12SW-A CL-F115-PL12SW-A	CL-F098-PL14SW-A CL-F116-PL14SW-A
Size (mm)	120 x 120 x 25	140 x 140 x 25
Max Airflow (CFM)	56.51	82.23
Max Static Pressure (mm-H ₂ O)	1.72	2.24
Max Noise Level (dBA)	28	33.5
Speed (R.P.M)	500-1500	500-1500
Connector	Fan-2510 4P, LED 5V RGB Header	
PWM Support	V	
Smart FAN Controller	V	
ASUS Aura	V	
GIGABYTE RGB Fusion	V	
MSI Mystic Light Sync	V	
ASRock Polychrome	V	

Model	Pure ARGB		
LED Rings	1		
LEDs	9		
P/N	CL-F079-PL12SW-A CL-F127-PL12SW-A	CL-F080-PL14SW-A	CL-F081-PL14SW-A
Size (mm)	120 x 120 x 25	140 x 140 x 25	200 x 200 x 30
Max Airflow (CFM)	56.45	70.32	129.54
Max Static Pressure (mm-H ₂ O)	1.59	1.62	1.72
Max Noise Level (dBA)	25.8	30.4	31.2
Speed (R.P.M)	500-1500	600-1500	500-1000
Connector	Fan-2510 4P, LED 5V RGB Header		
PWM Support	V		
Smart FAN Controller	V		
ASUS Aura	V		
GIGABYTE RGB Fusion	V		
MSI Mystic Light Sync	V		
ASRock Polychrome	V		

Standard Fans



Standard fans are for those who like neat and simple designed fans with a budget friendly and energy saving approach. Thermaltake's standard fans are also made with 1st Generation hydraulic bearings which ensures the fans' quality and lifespan.



1st Generation Hydraulic Bearings

The hydraulic bearing self-lubricates with a high-quality, friction-reducing substance, which lowers operation noise while improving thermal efficiency. The seal cap prevents lubricant leakage and extends the lifespan of the unit.



Pure A has a robust structure with a soft single color glow that shines through the users build.

Model	Pure A LED	
LEDs	9	
Colors	Red / Blue / White / Green	
P/N	CL-F109-PL12BU-A CL-F109-PL12RE-A CL-F109-PL12WT-A CL-F109-PL12GR-A	CL-F110-PL14BU-A CL-F110-PL14RE-A CL-F110-PL14WT-A CL-F110-PL14GR-A
Size (mm)	120 x 120 x 25	140 x 140 x 25
Max Airflow (CFM)	56.45	93.15
Max Static Pressure (mm-H2O)	1.59	2.05
Max Noise Level (dBA)	25.8	32
Speed (R.P.M)	500-1500	500-1500
Connector	4 PIN PWM	
PWM Support	V	
Software Support	N/A	



Riing LEDs are patented color LED fans with a single ring of LED lighting; there are six different colors to choose from

Model	Riing LED	
LEDs	2	
Colors	Red / Blue / White / Green / Orange / Yellow	
P/N	CL-F038-PL12RE-A CL-F038-PL12BU-A CL-F038-PL12WT-A CL-F038-PL12GR-A CL-F038-PL12OR-A CL-F038-PL12YL-A	CL-F039-PL14RE-A CL-F039-PL14BU-A CL-F039-PL14WT-A CL-F039-PL14GR-A CL-F039-PL14OR-A CL-F039-PL14YL-A
Size (mm)	120 x 120 x 25	140 x 140 x 25
Max Airflow (CFM)	40.6	51.15
Max Static Pressure (mm-H2O)	2.01	1.58
Max Noise Level (dBA)	24.6	28.1
Speed (R.P.M)	1500/1000 (with LNC)	1400/1000 (with LNC)
Connector	3 PIN+LNC (Low Noise Cable)	
PWM Support	X	
Software Support	N/A	