

DRAWING KEY

FOLD TYPES



A - FOLD (ABOVE)





B - FOLD (BESIDE)





C - FOLD (COVER)




LINE TYPE/COLOR




CUT






50% SCORE






CREASE






45° DOUBLE BEVEL






45° SINGLE BEVEL






EDGE BEVEL






CAVITY





REMOVE PAPER





REFERENCE/OPTIONAL



SYMBOLS



PART NUMBER

NAME

MODEL VERSION




QUANTITY

MIRRORED PART



MIRRORED PART

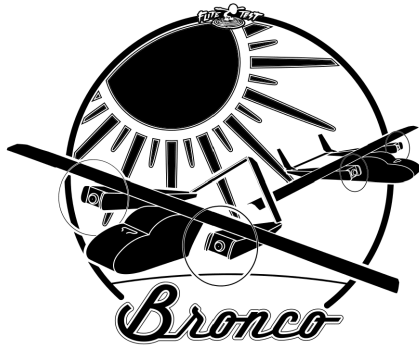

WEIGHT W/O BATTERY:

22.4 oz 640 g

RECOMMENDED SETUP:









THROW EXPO
AILERON: 12° 30%
ELEVATOR: 12° 30%
RUDDER: 12° 30%


RECOMMENDED EQUIPMENT:

MOTOR: Park 370-425, 1000 kv (min)
ESC: 20-30 amp
BATTERY: 2200 mAh 3s (min)
SERVOS: 9 gram X4
PROP: 8 X 4.5 Slow Fly / 9 X 6 APC

AIRCRAFT SPECIFICATIONS:

LENGTH: 36 in 927 mm
WING SPAN: 42.75 in 1086 mm
WING AREA: 323 in² 20.8 dm²
CG: 2 in 51 mm
AUW: 29.3 oz 830 g
WL: 13.1 oz./ft² 40 g/dm²
WCL: 8.7

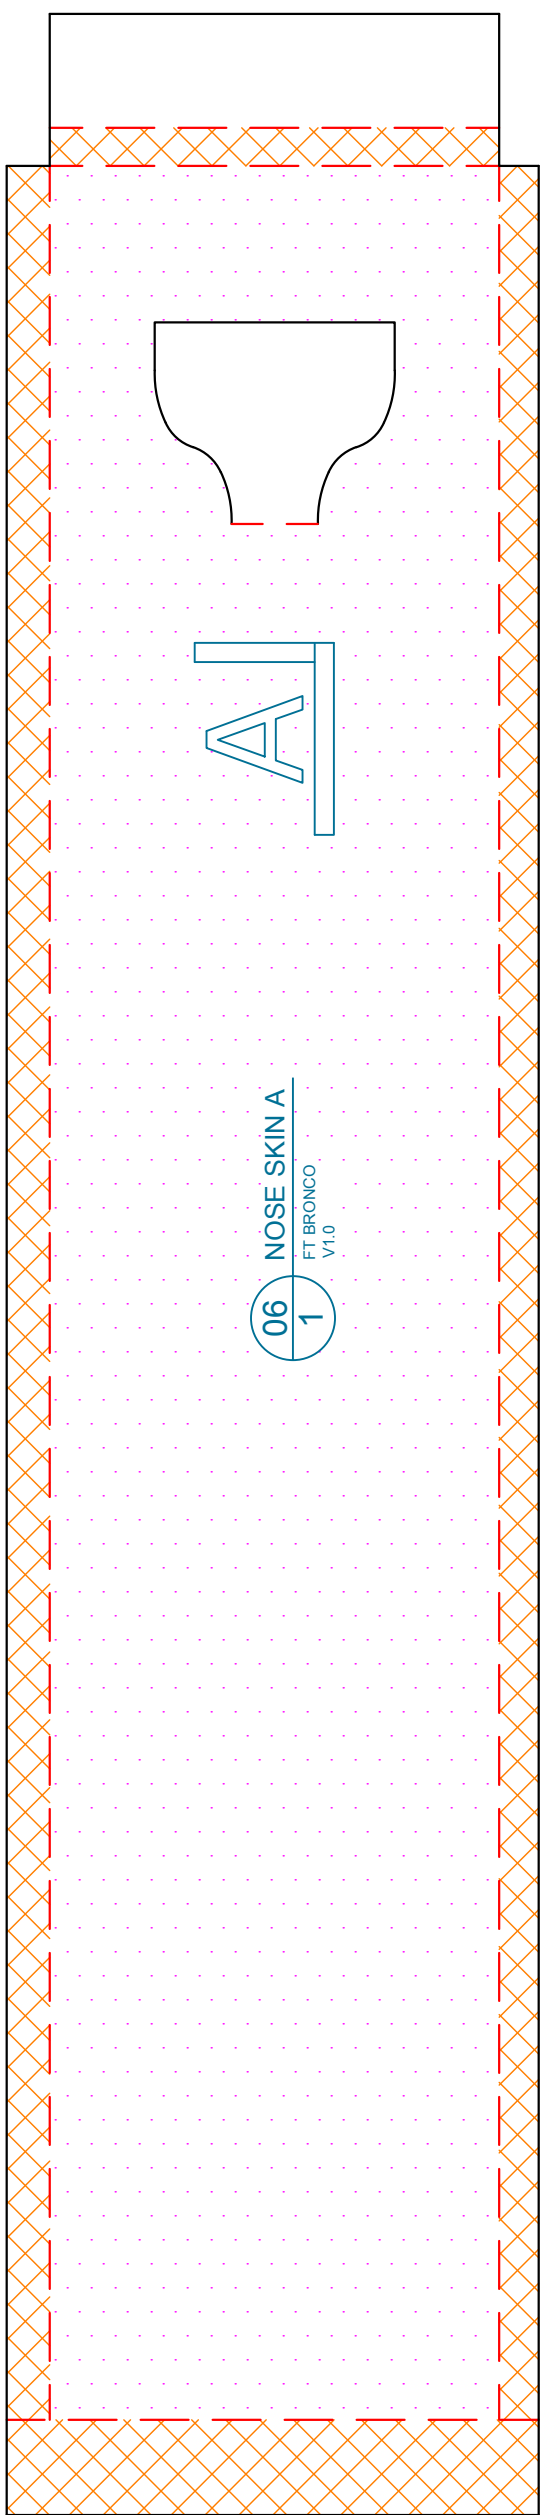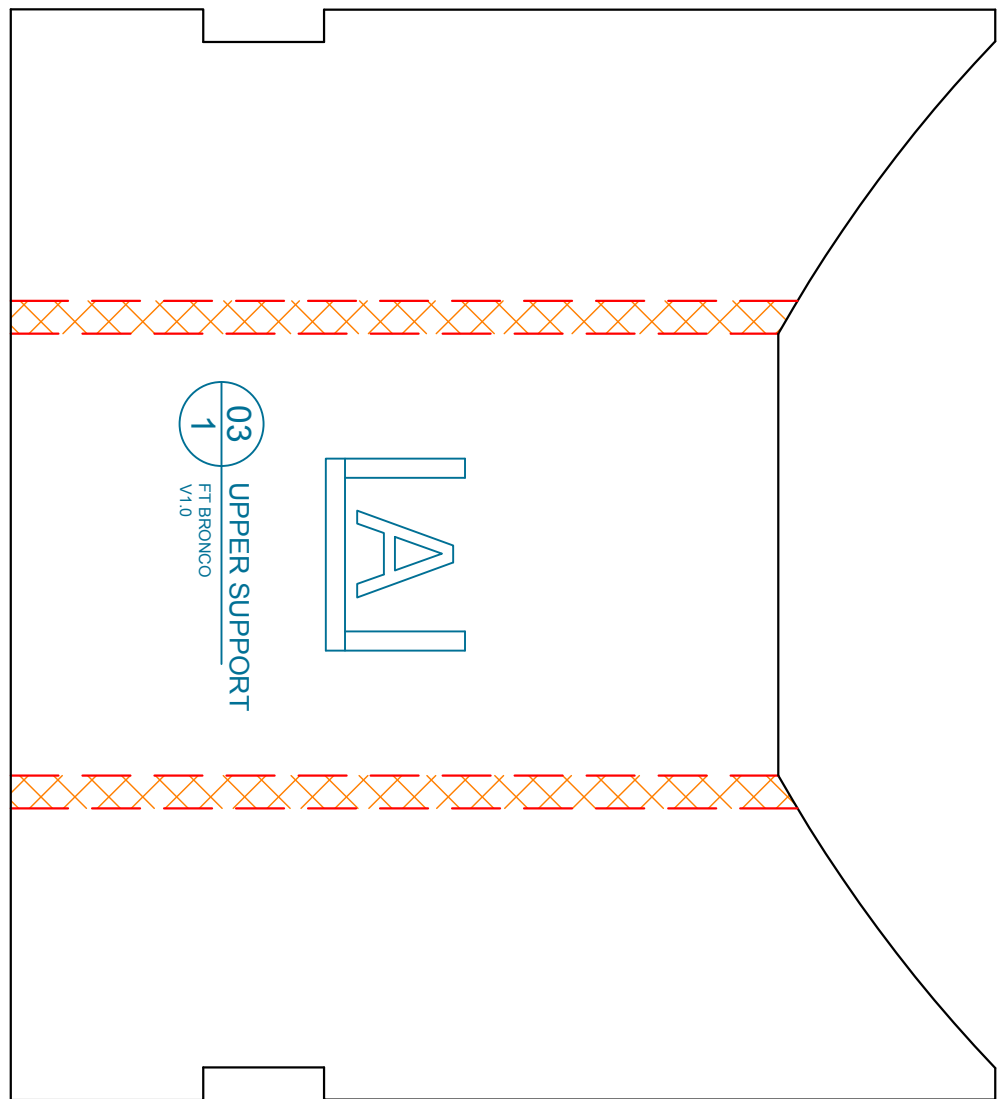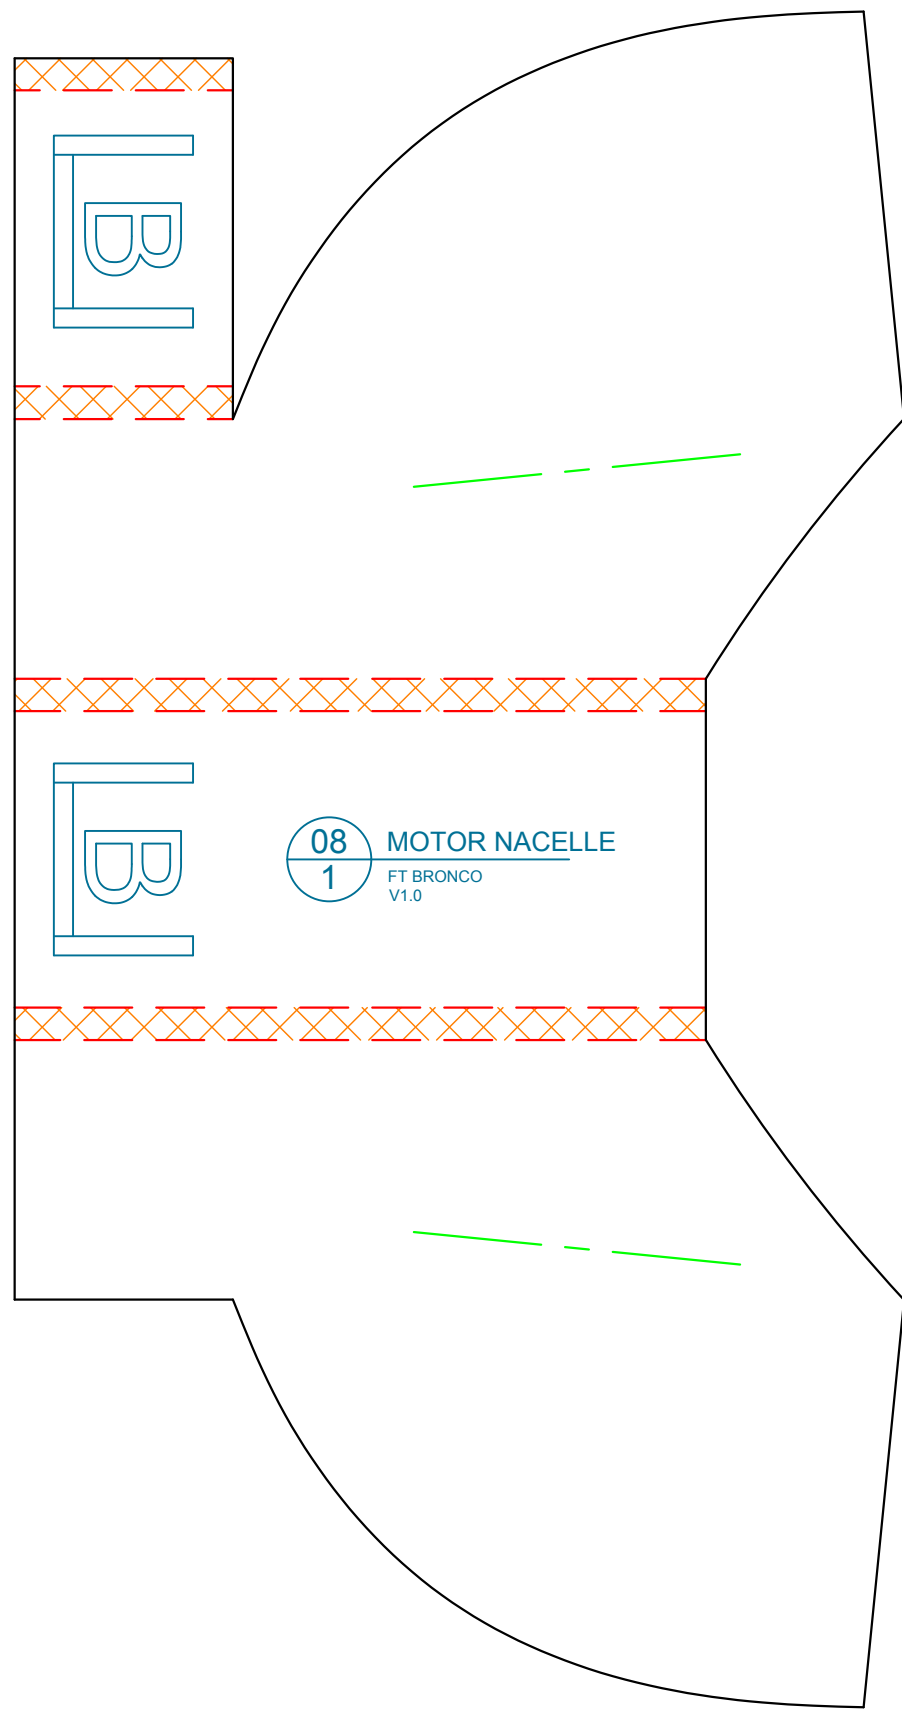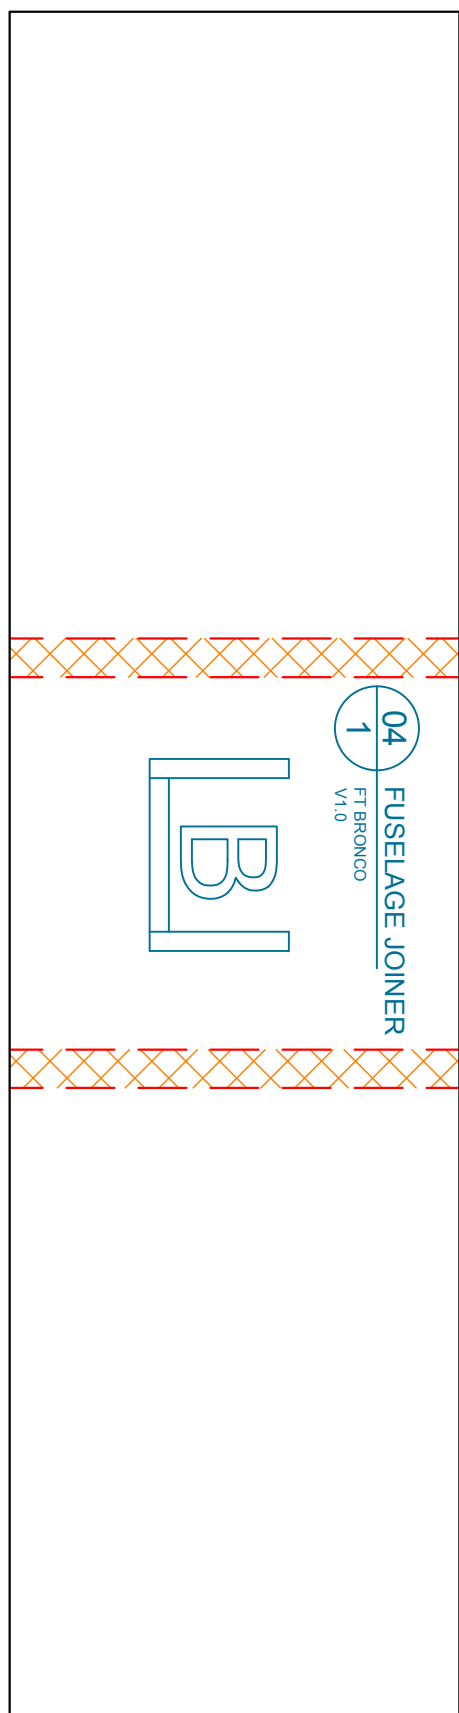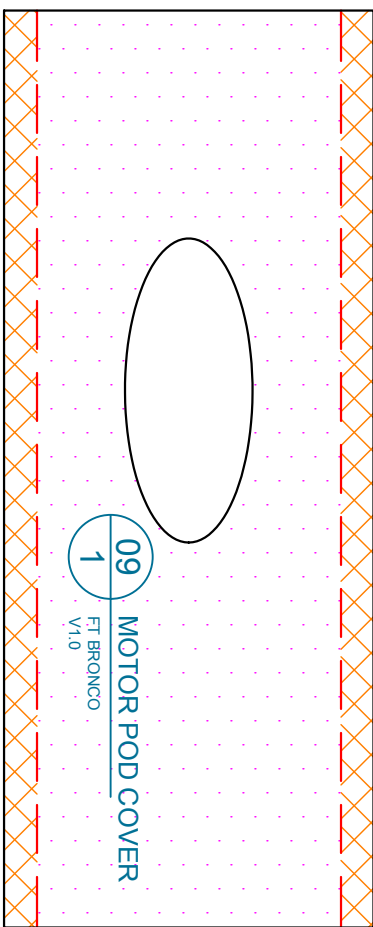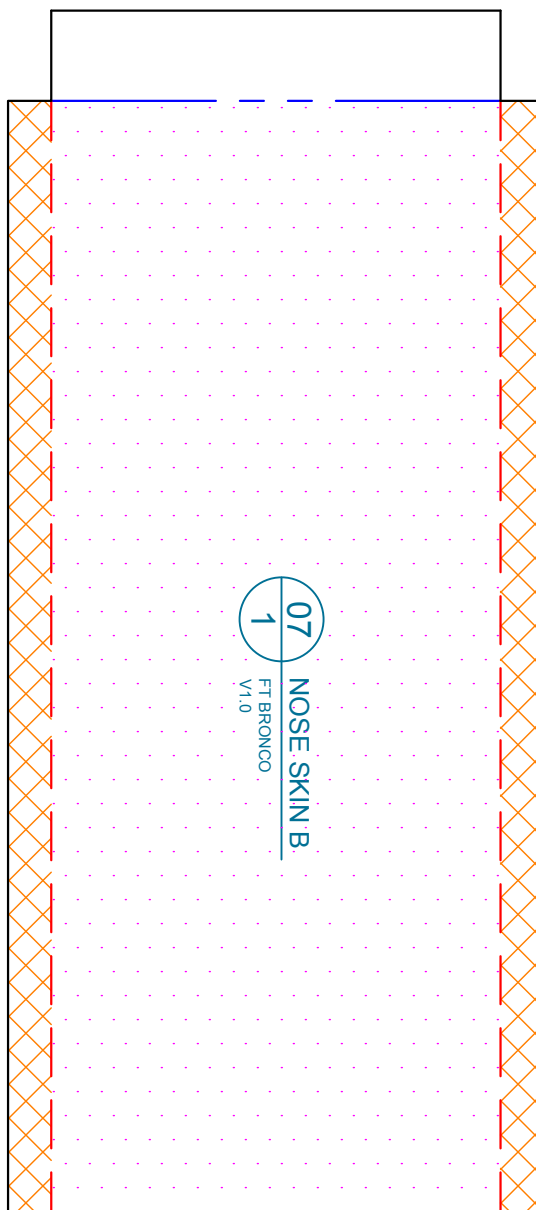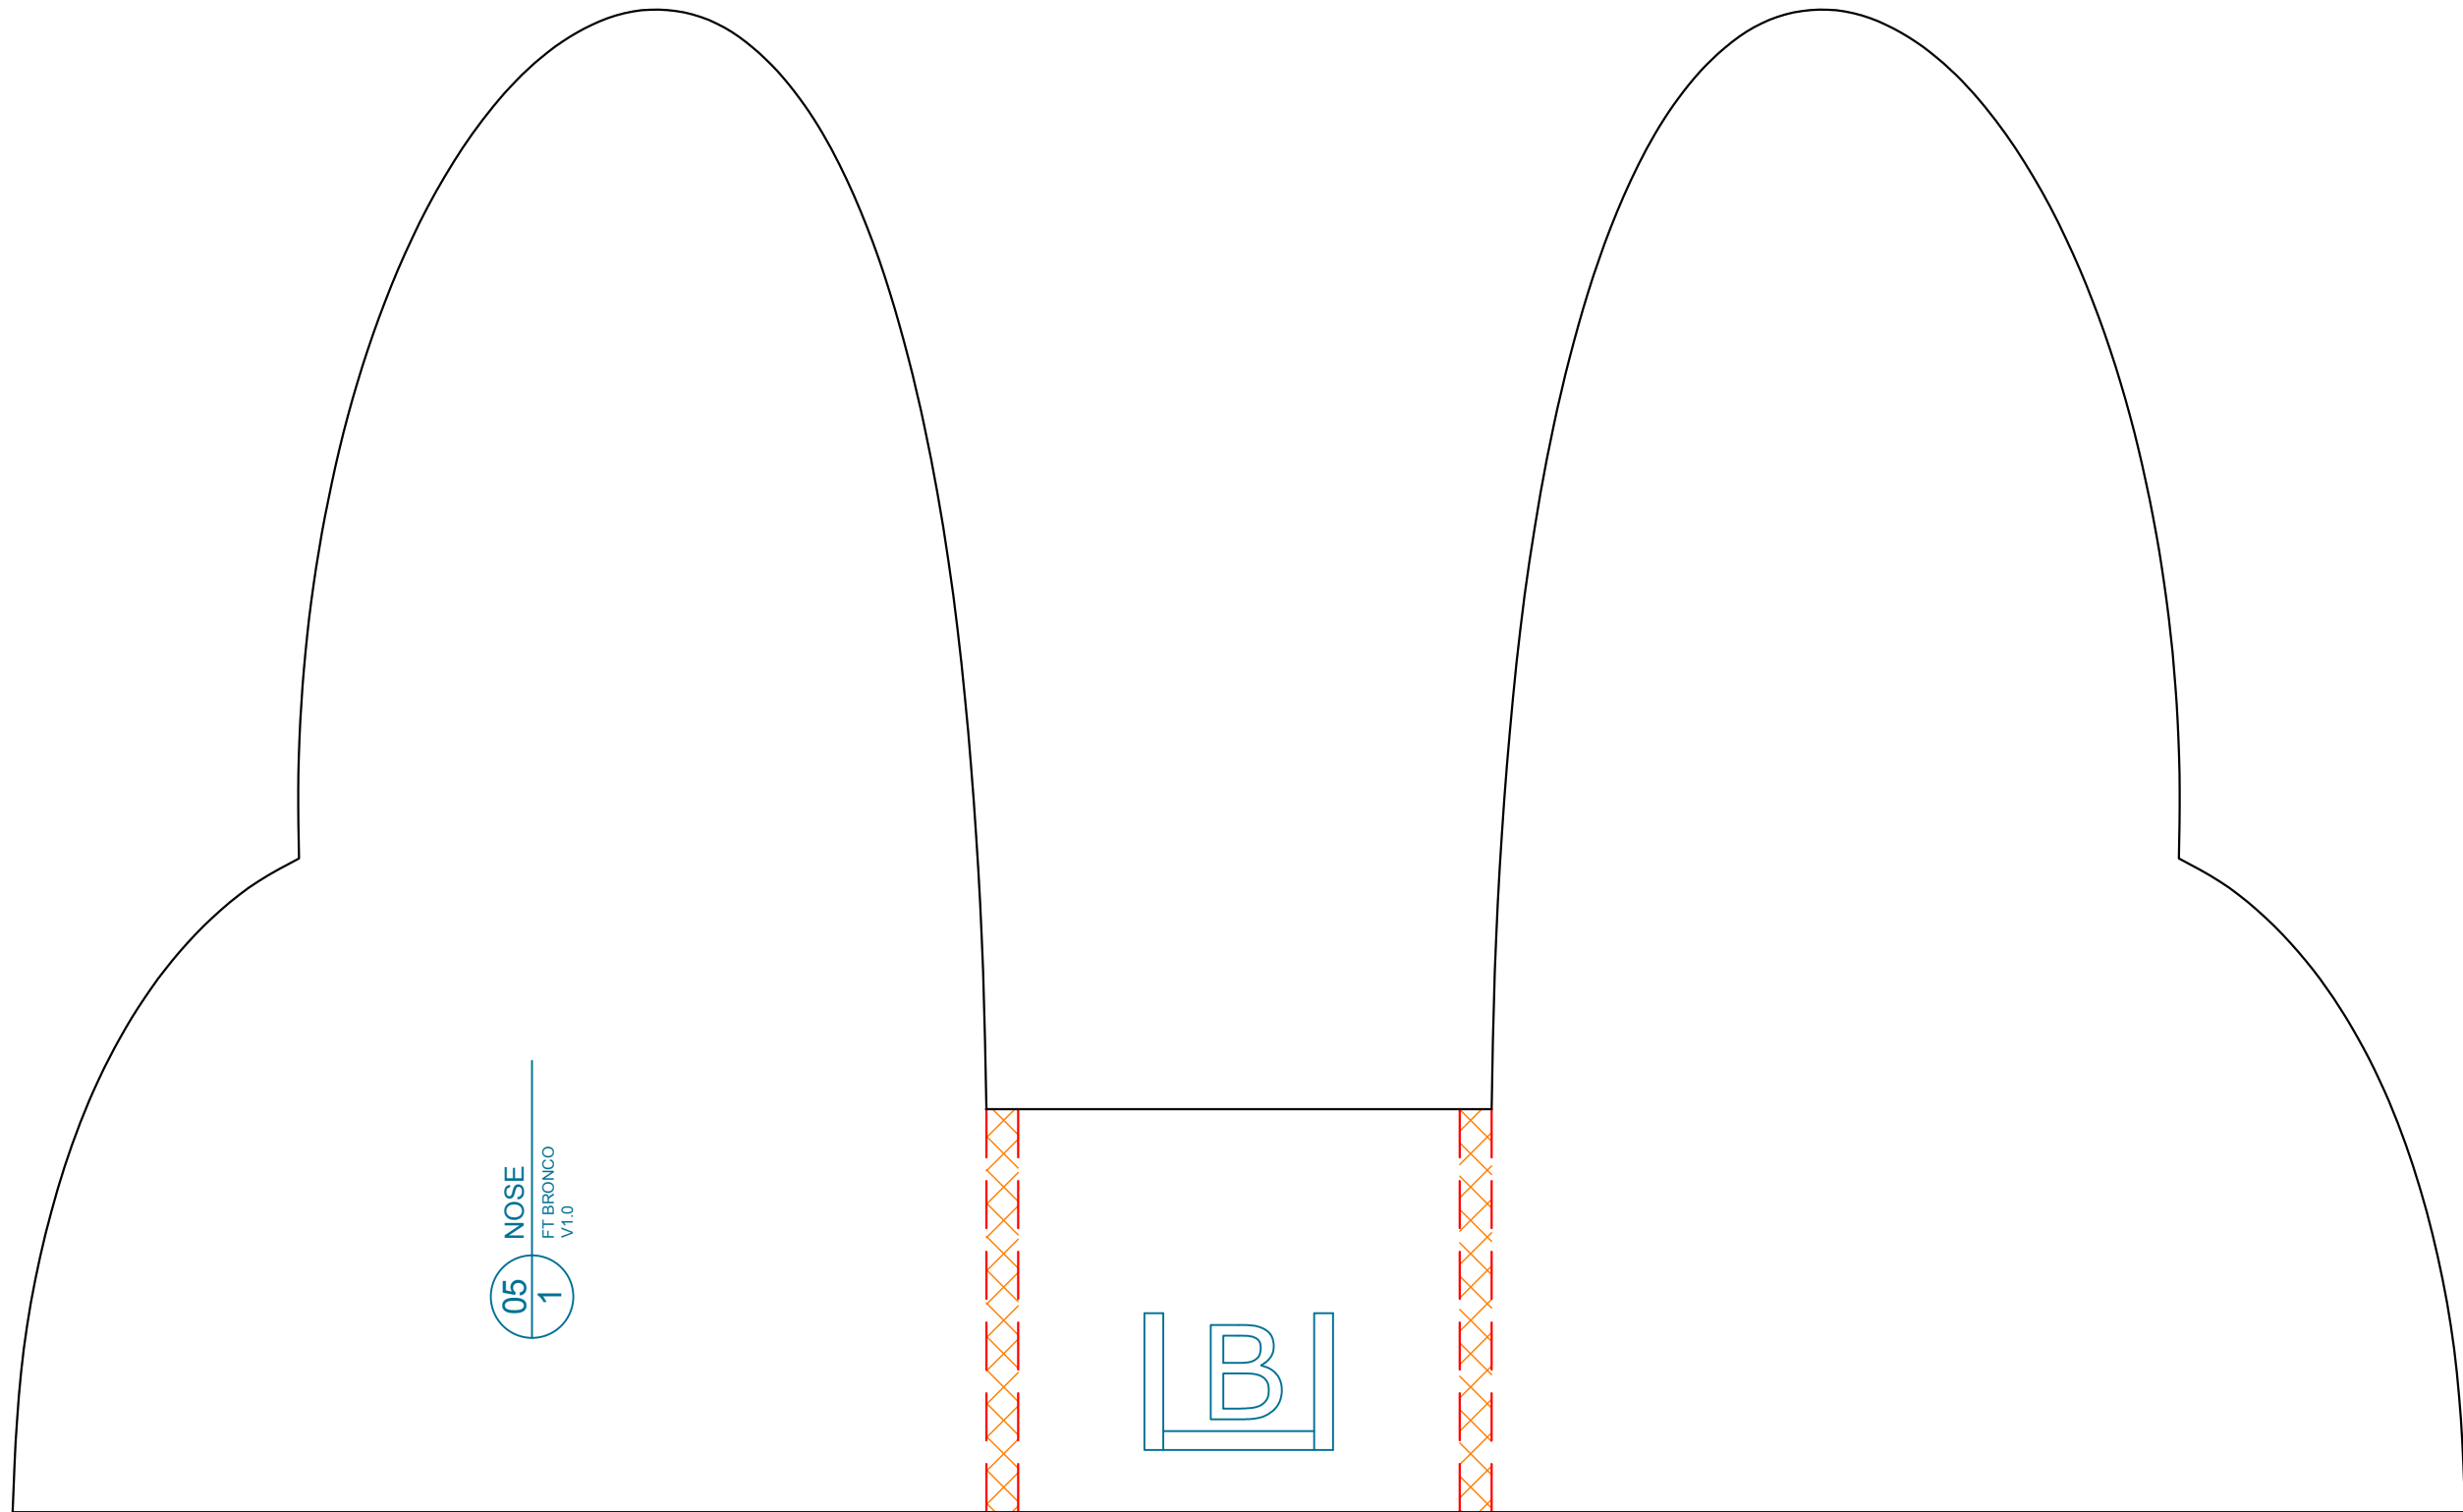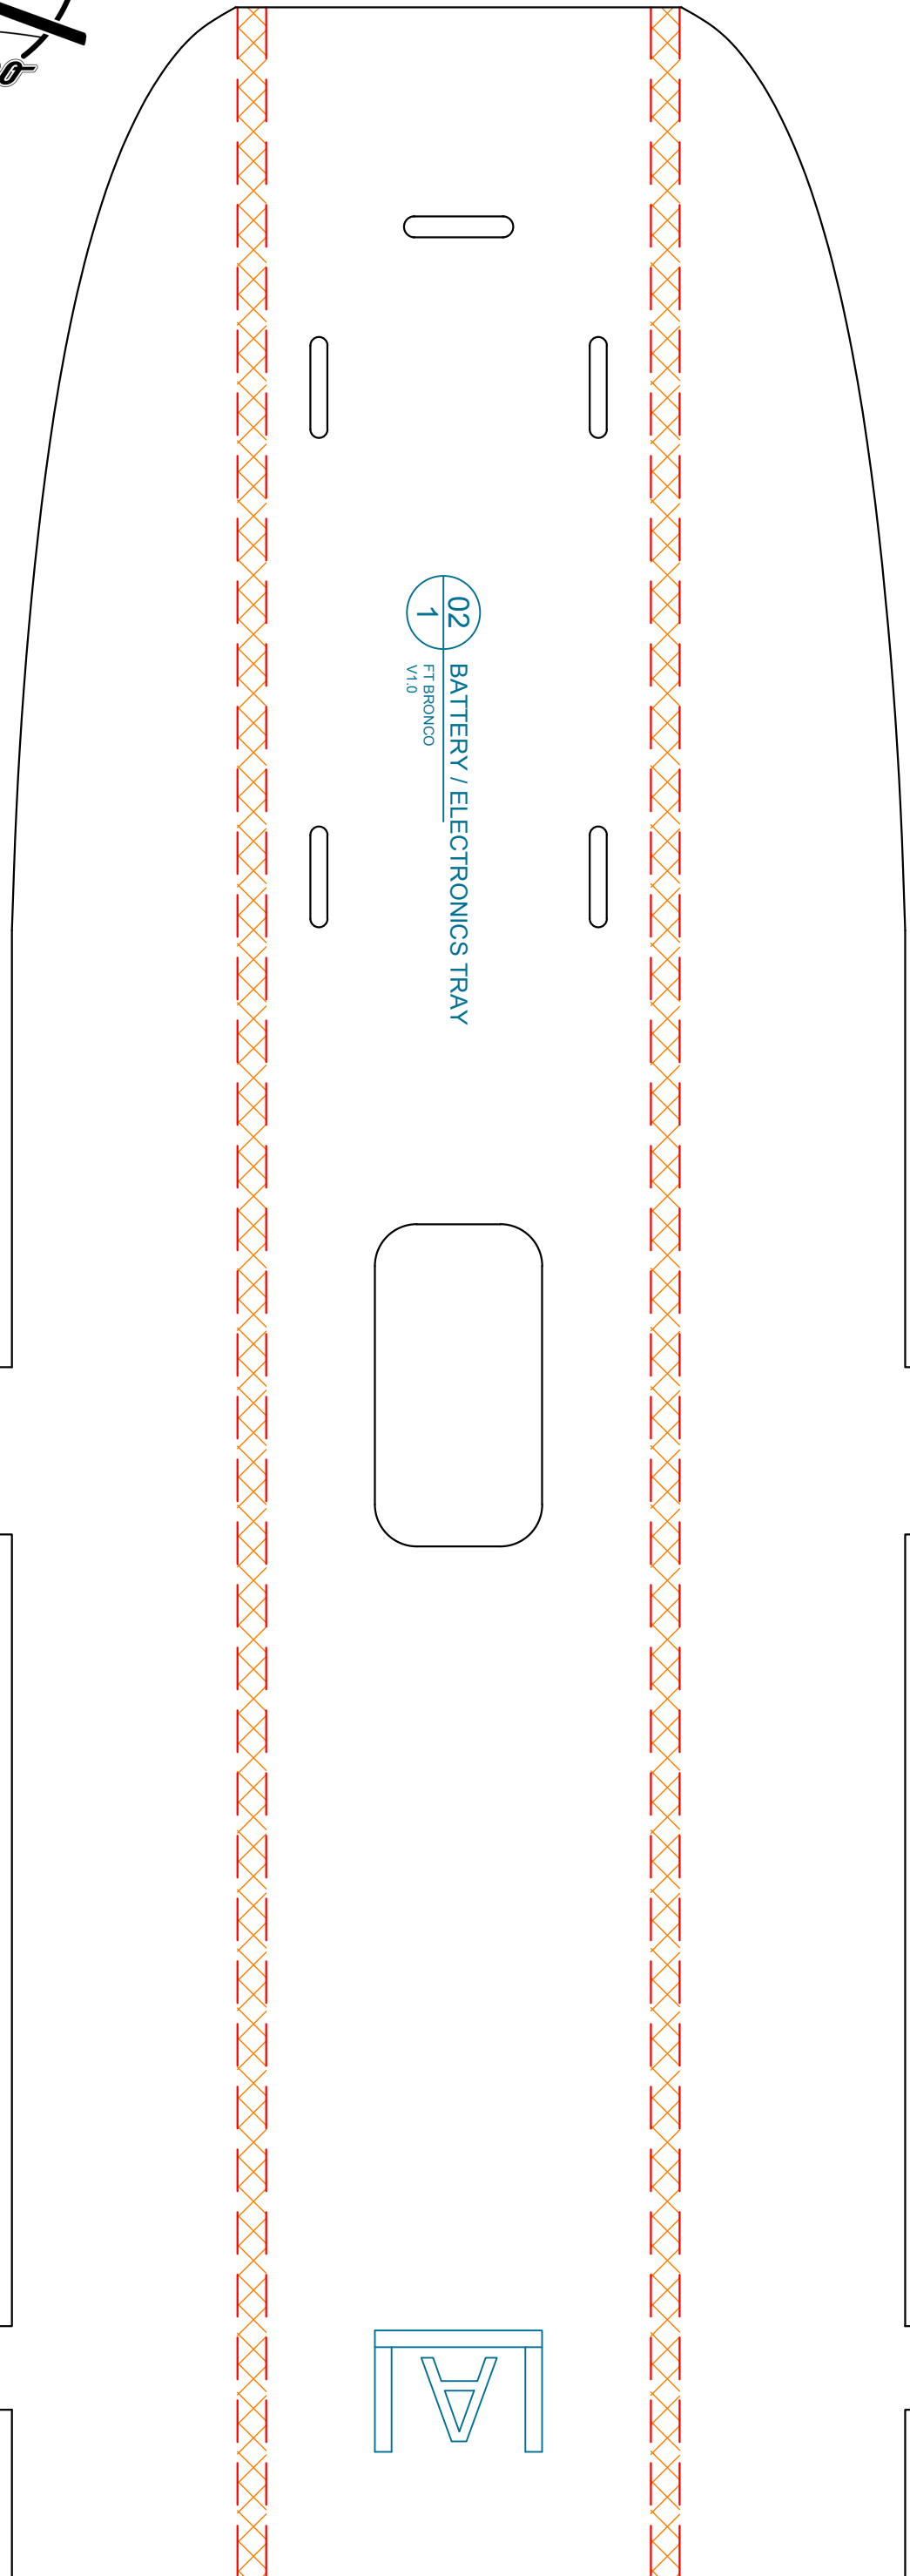

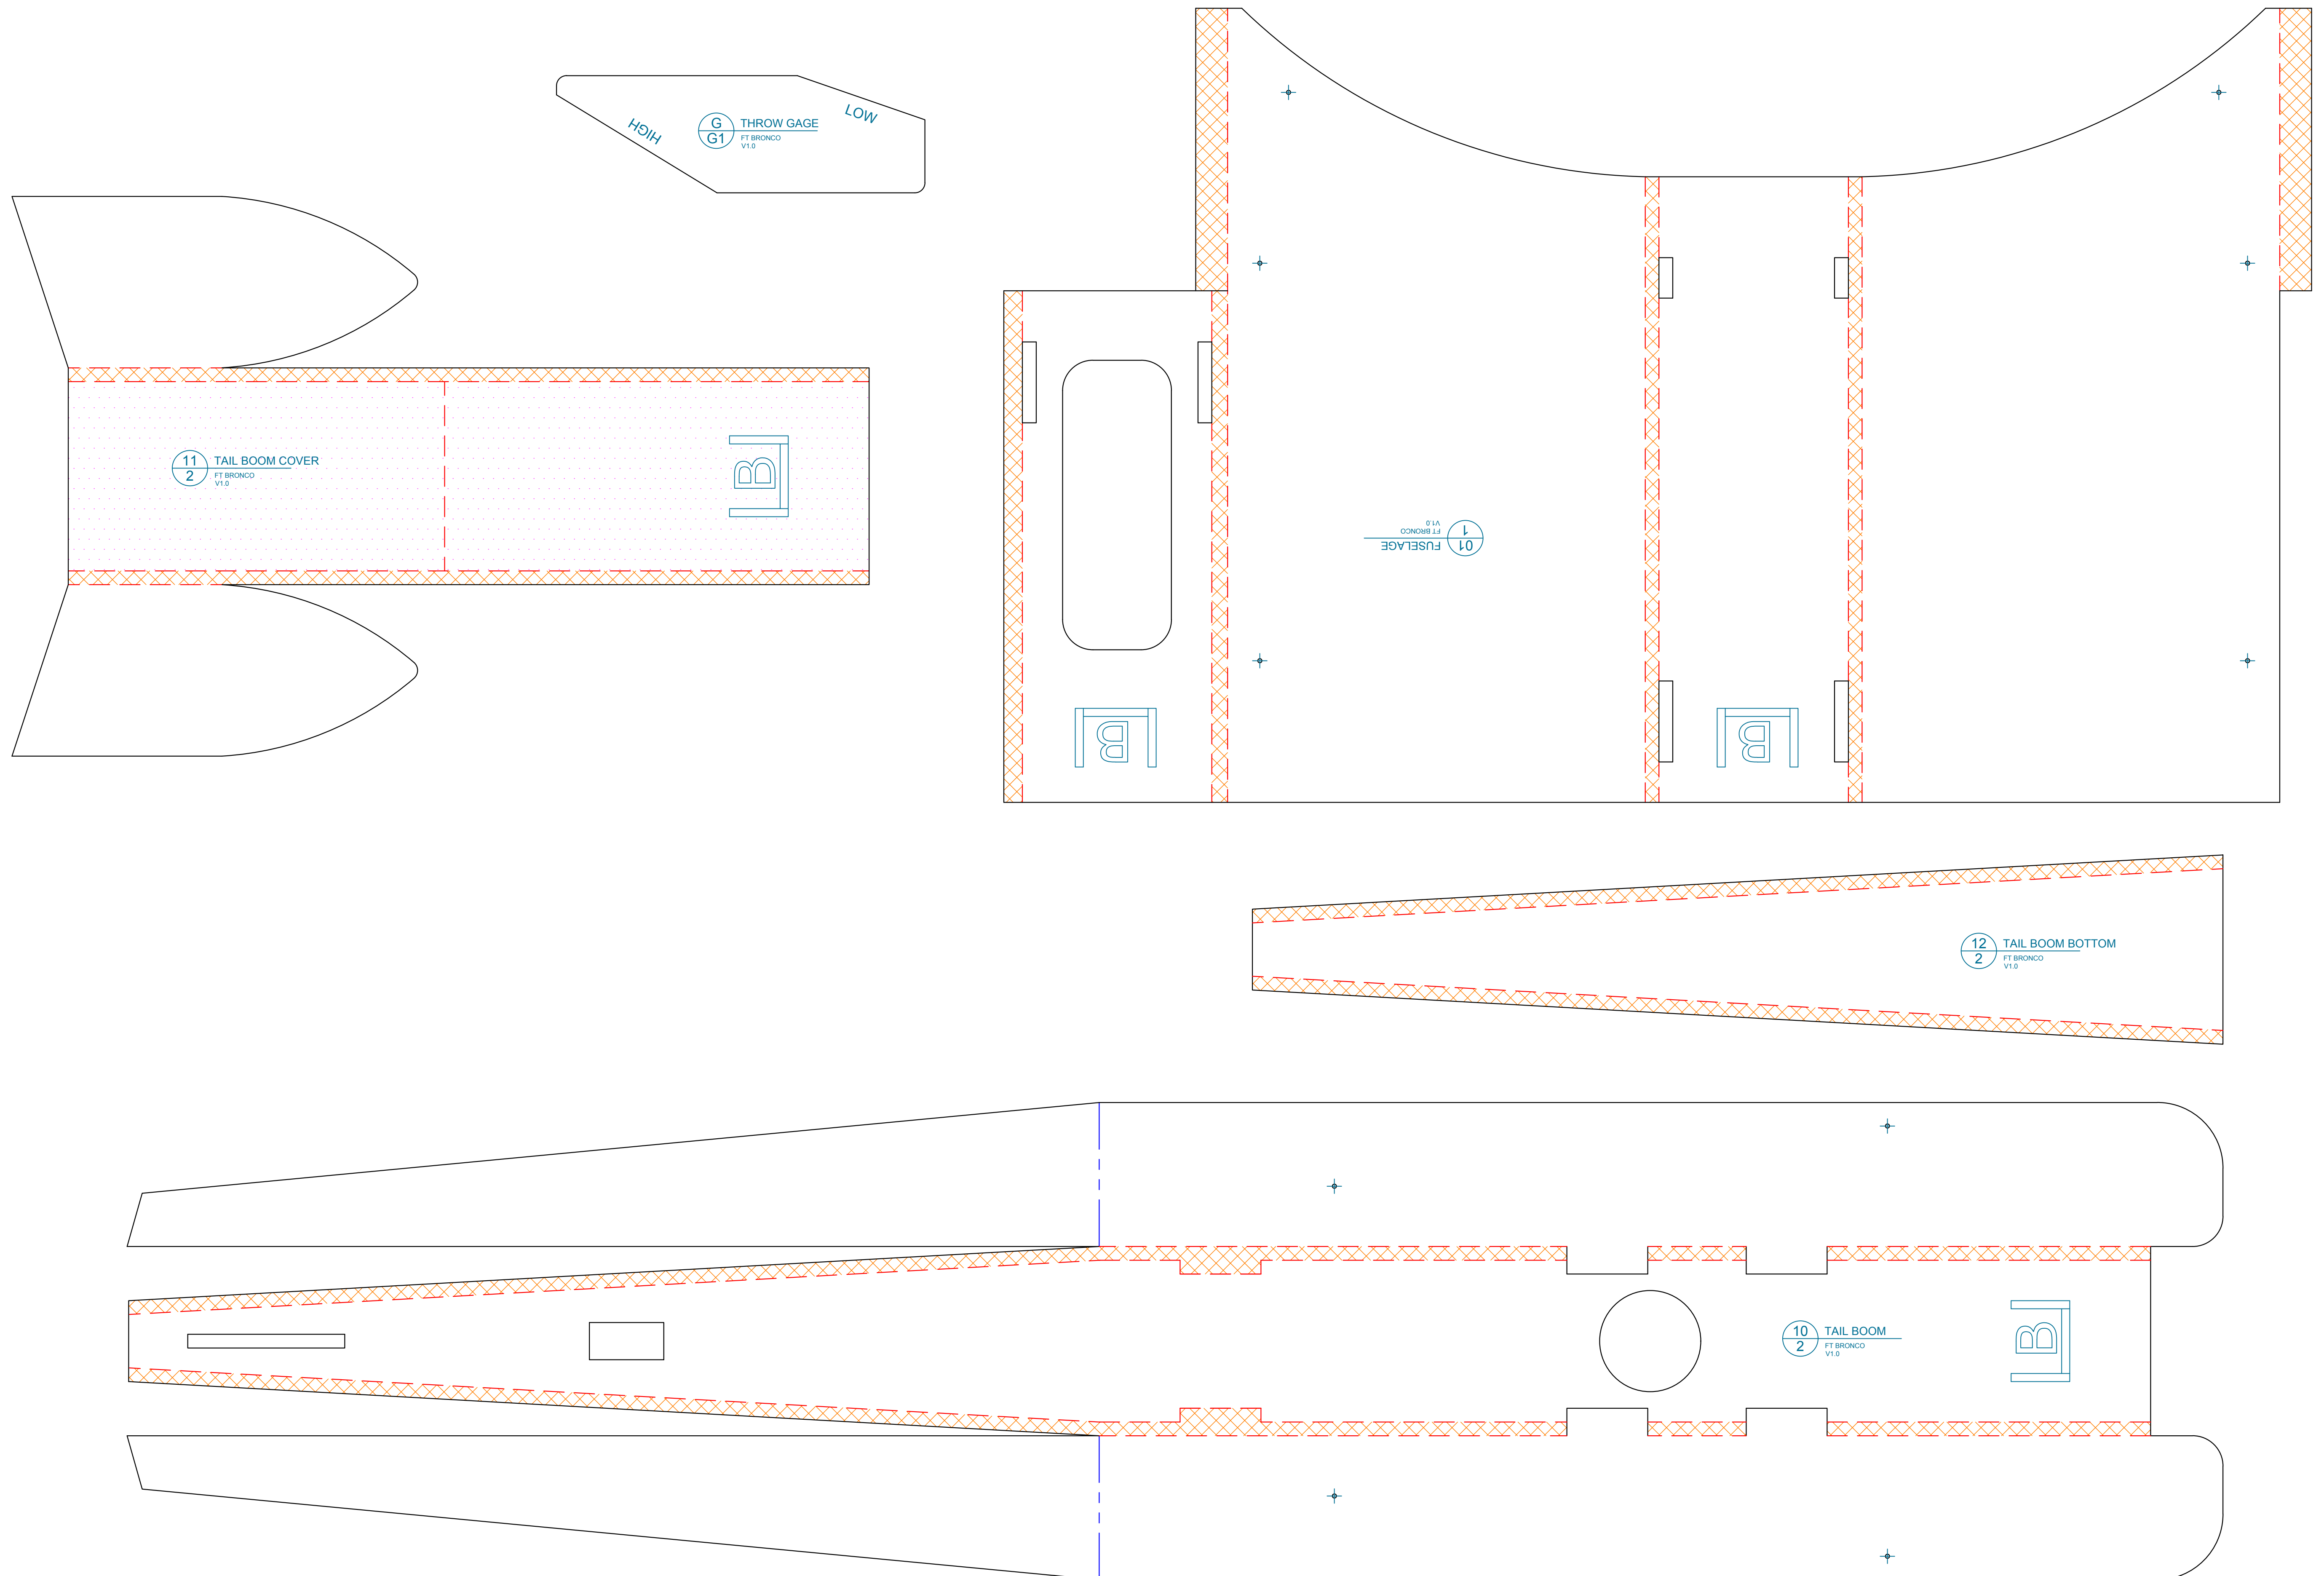



14 H-TAIL HORIZONTAL STABILIZER

