

DRAWING KEY

FOLD TYPES

A

A - FOLD (ABOVE)

A - FOLD (ABOVE)

B

B - FOLD (BESIDE)

B - FOLD (BESIDE)

C

C - FOLD (COVER)

C - FOLD (COVER)

LINE TYPE/COLOR

CUT

CUT

50% SCORE

50% SCORE

CREASE

CREASE

45° DOUBLE BEVEL

45° DOUBLE BEVEL

45° SINGLE BEVEL

45° SINGLE BEVEL

EDGE BEVEL

EDGE BEVEL

CAVITY

CAVITY

REMOVE PAPER

REMOVE PAPER

REFERENCE/
OPTIONAL

REFERENCE/
OPTIONAL

SYMBOLS

PART
NUMBER

NAME


MODEL
VERSION

QUANTITY

1L | 1R

MIRRORED
PART

Designed By: Josh Bixler

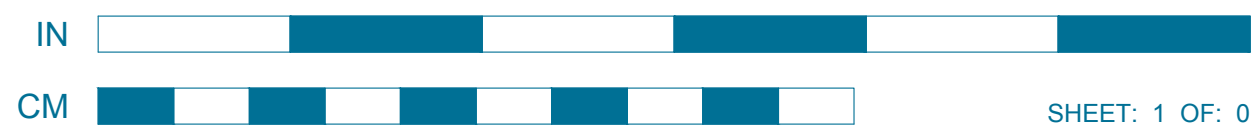

SHEET: 1 OF: 0

WEIGHT W/O BATTERY:

27 oz
766 g

RECOMMENDED SETUP:








	THROW	EXPO
AILERON:	19°	30%
ELEVATOR:	10°	30%
RUDDER:	19°	30%

RECOMMENDED EQUIPMENT:

MOTOR: Park 400 810kv Minimum
ESC: 18 - 30 amp
BATTERY: 2200 mAh 3s
SERVOS: 9 gram X 4 - 6
PROP: 8 X 6 - 9 X 4.7 Slow fly

AIRCRAFT SPECIFICATIONS:

LENGTH:	31.5 in	800 mm
WING SPAN:	49.75 in	1264 mm
WING AREA:	374 in ²	24.1 dm ²
CG:	2.9 in	74 mm
AUW:	33.9 oz	960 g
WL:	13.1 oz/ft ²	39.9 g/dm ²
WCL:	8:1	

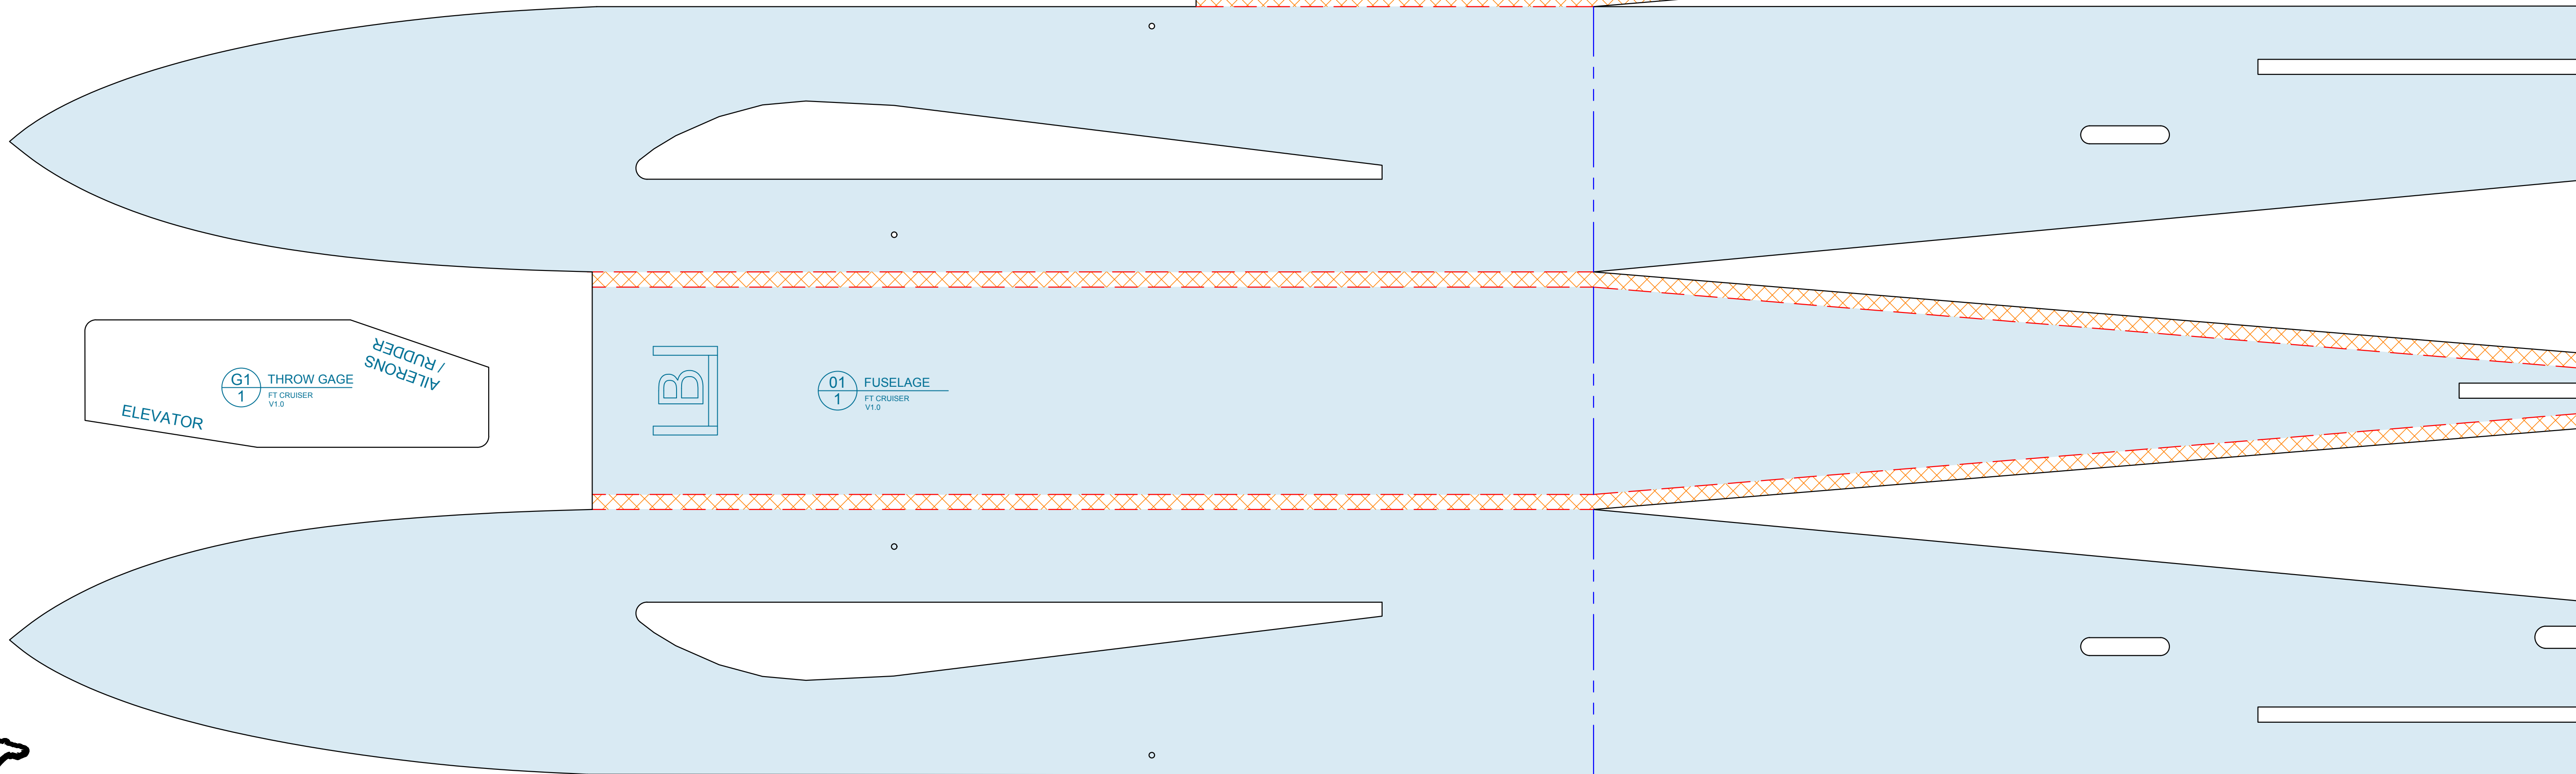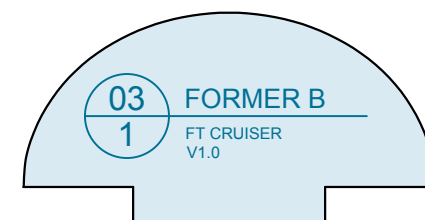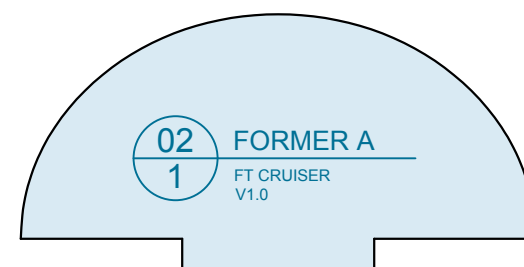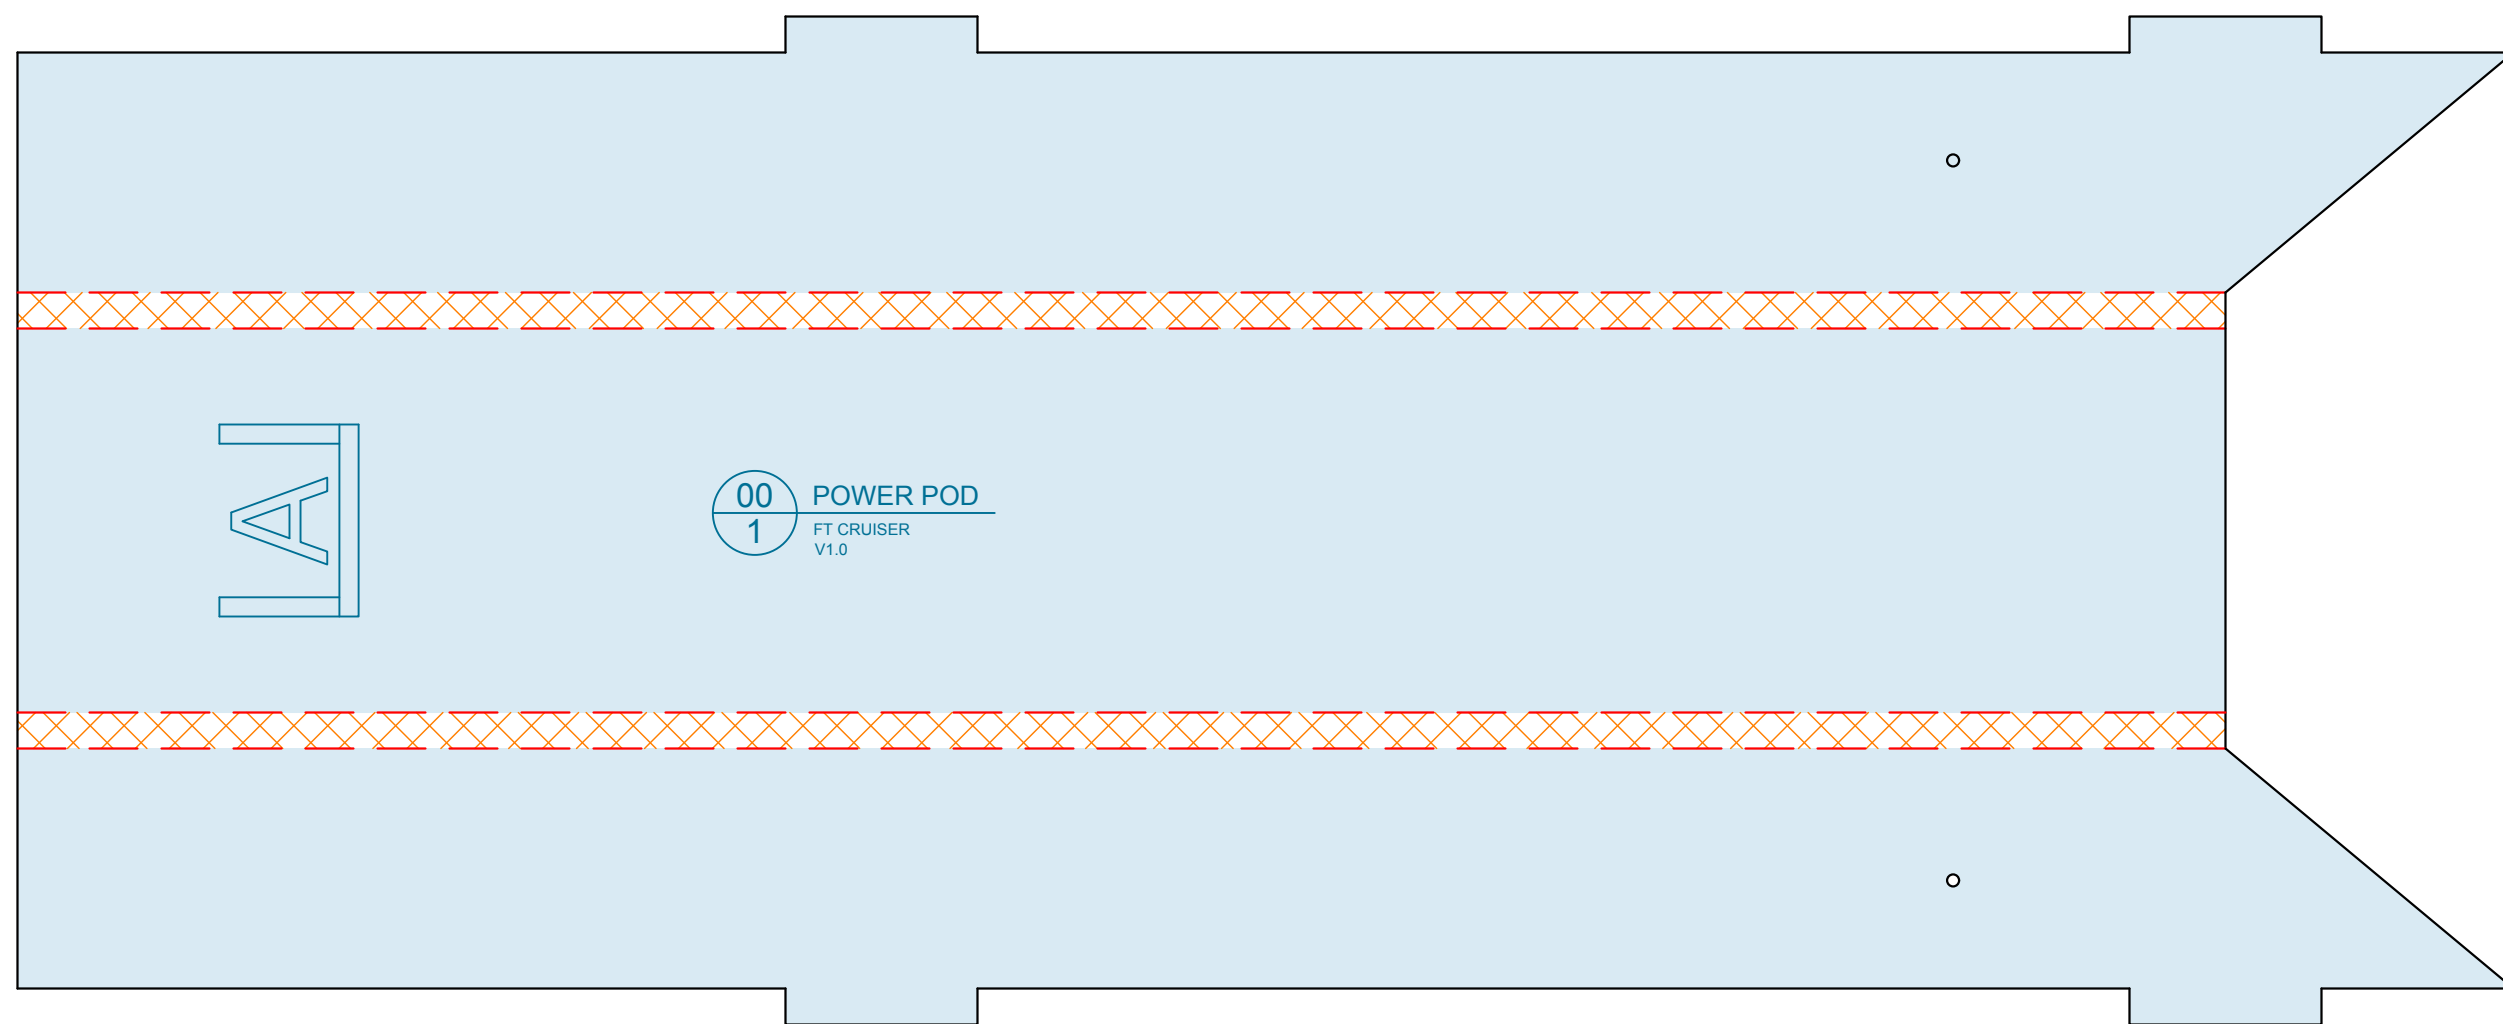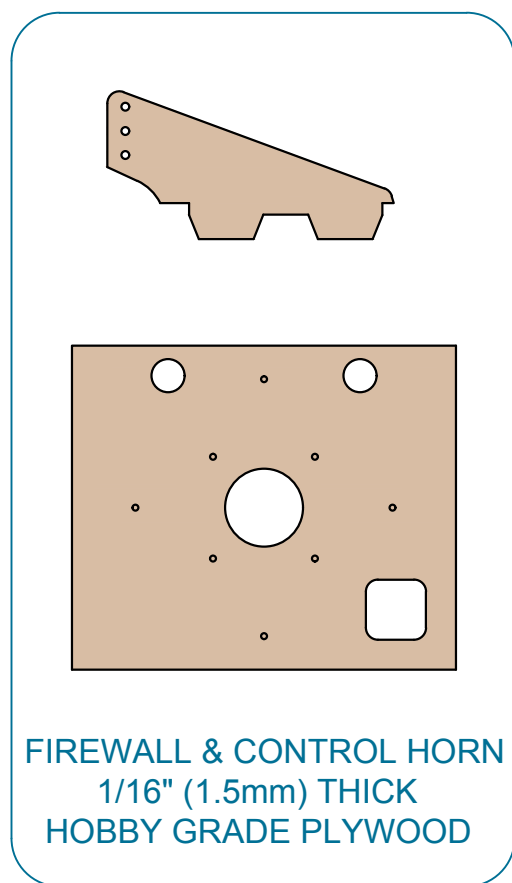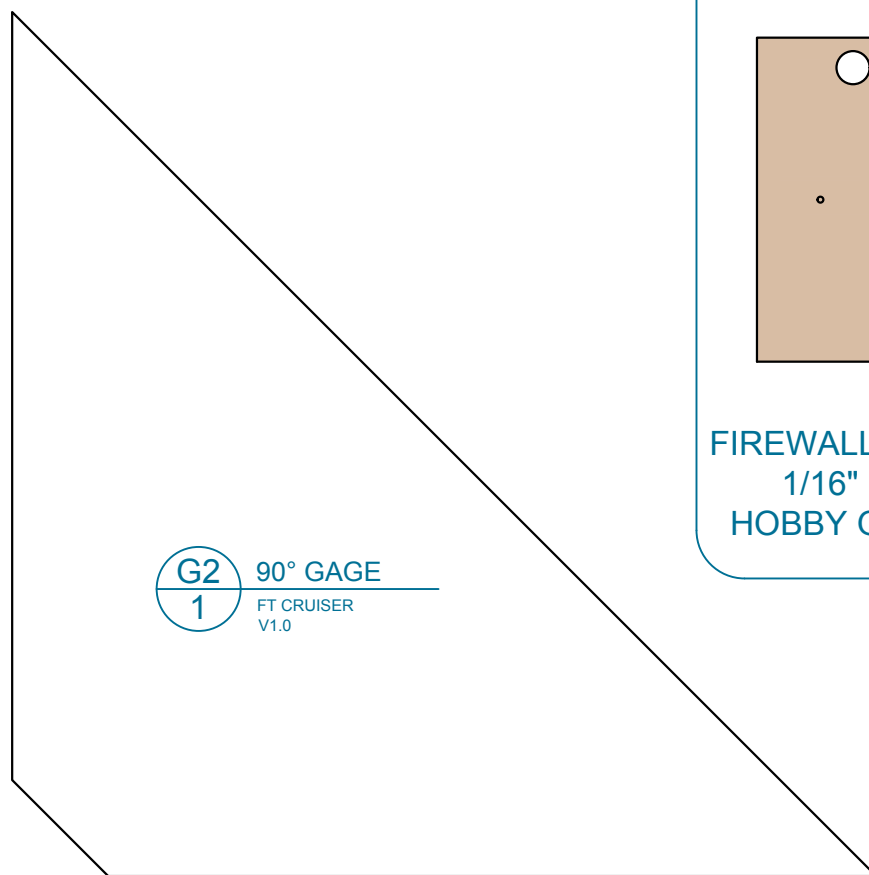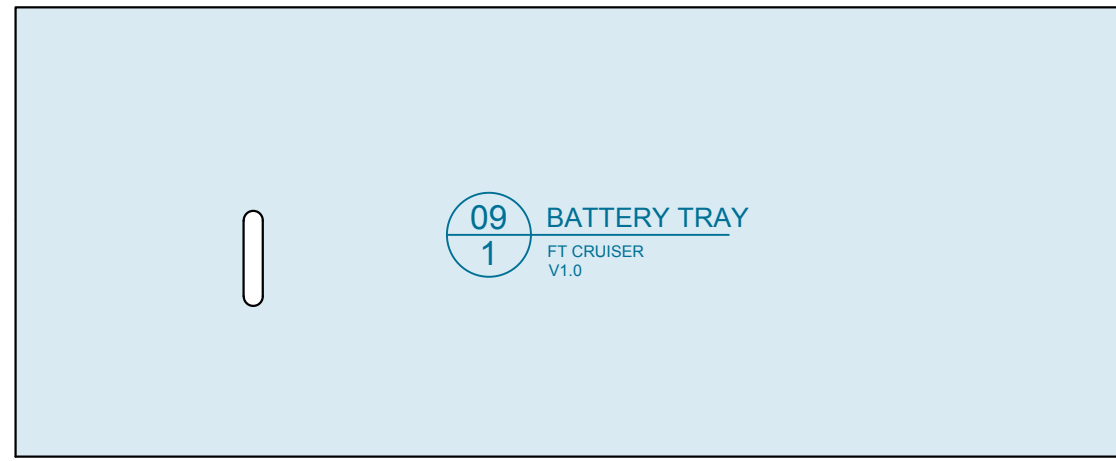

www.flitetest.com



