


R1 is used to set battery charging current.
The resistor must be selected according to the battery used and equation below.
The maximum charging current must be 0.8C.


$$R1 = 1000/I_c$$

I_c in mA

R1 in K ohms

Circuit maximum output = 500mA

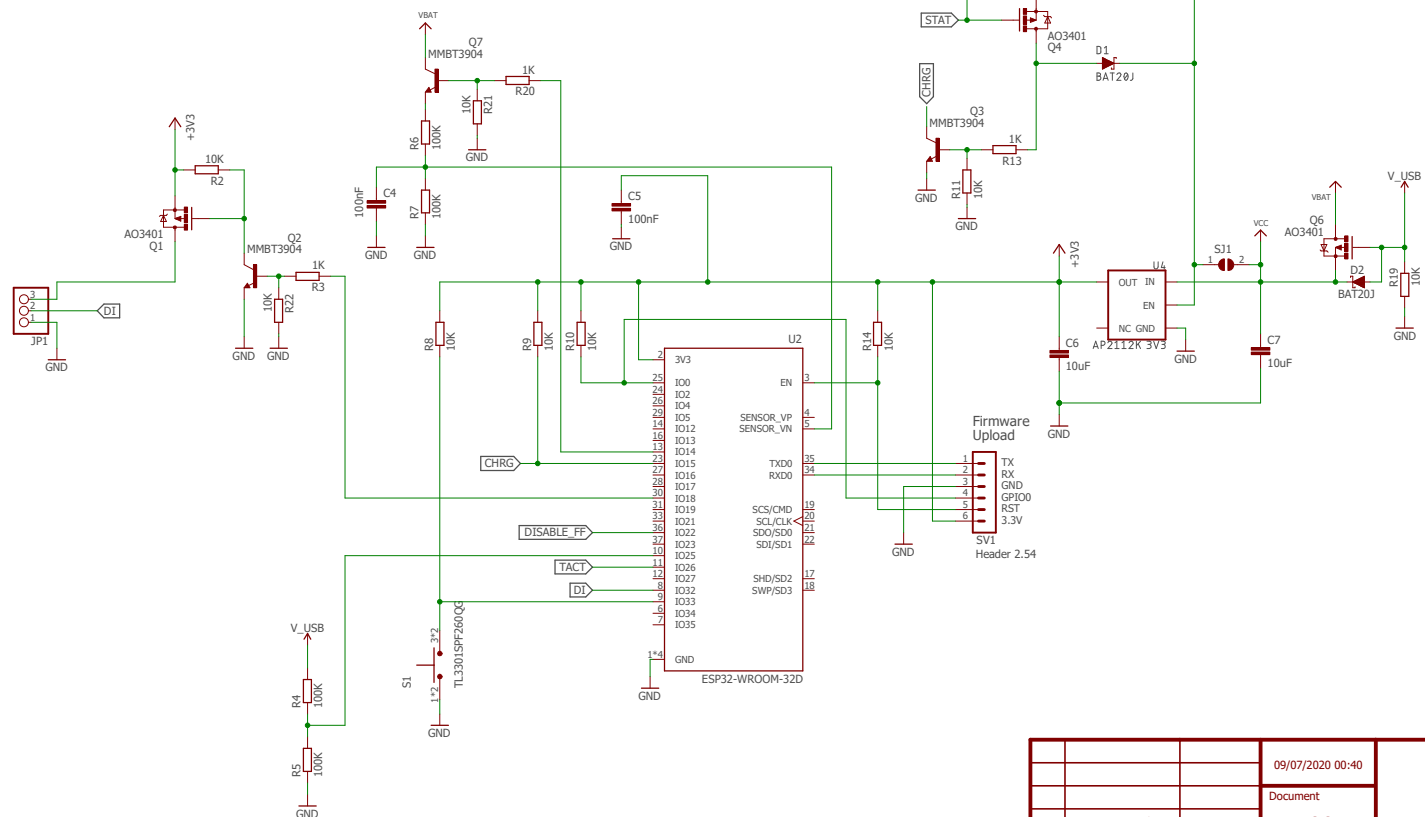

			09/07/2020 00:40	 NearTech
			Document	
1	Button strategy change	01/07/20	LF-001	
0	Release	23/04/20		
Rev	Description	Date	1/1	
				ESP32 led flasher 3