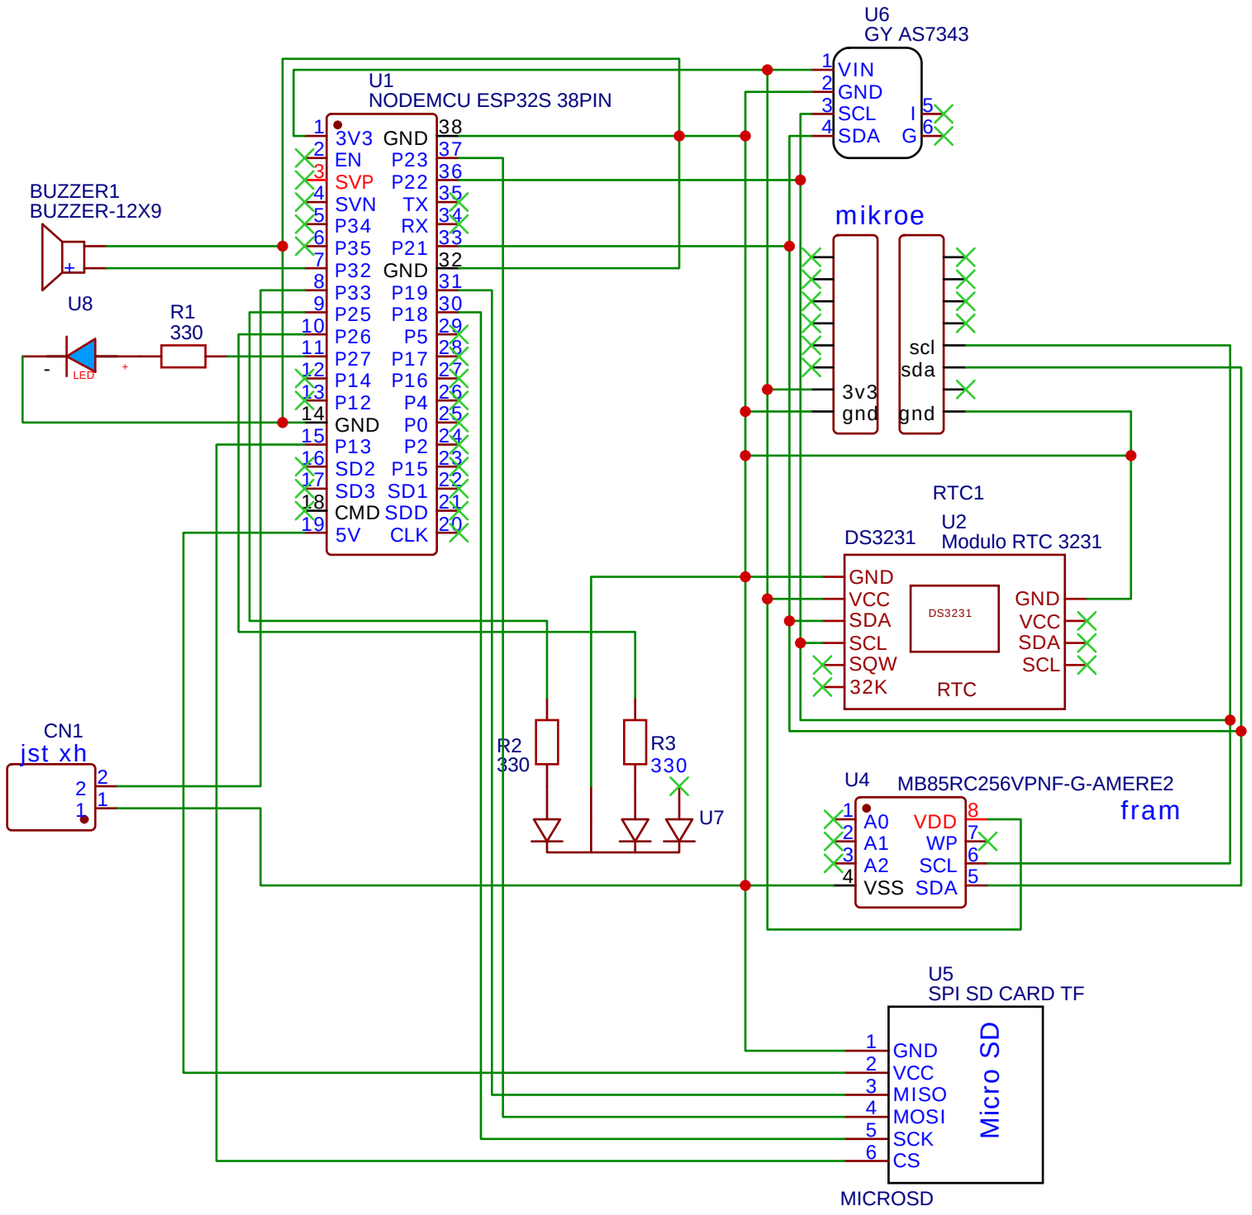

NOTES

Consider an off-board button connected through JST XH.
Consider placing both optical sensors on the back and all other parts on the front.
Consider protected external 5 V power for the ESP32 instead of its USB connector.

TITLE: Sheet_1		REV: 1.0
EasyEDA	Company: Your Company	Sheet: 1/1
	Date: 2026-09-25 Drawn By:	