


Packet flow Test

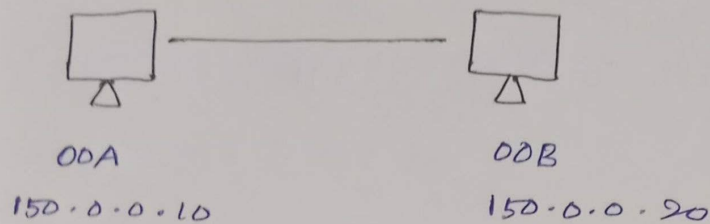

Ping 150.0.0.20


Write Packet flow of 150.0.0.10 to 150.0.0.20

ARP REQ

Sender IP	150.0.0.10
Sender mac	00A
Target IP	150.0.0.20
Target mac	00B

SMAC : 00A

DMAC : 00B




ARP RPY



Sender IP	150.0.0.20
Sender mac	00B
Target IP	150.0.0.10
Target mac	00A

SMAC : 00B

DMAC : 00A



ECHO	SIP: 150.0.0.10	SMAC: 00A
	DIP: 150.0.0.20	DMAC: 00B



ECHO	SIP: 150.0.0.20	SMAC: 00B
	DIP: 150.0.0.10	DMAC: 00A