CS5222 Computer Networks and Internets

Network Layer (Data Plane)

Prof Weifa Liang

Weifa.liang@cityu.edu.hk

Slides based on book *Computer Networking: A Top-Down Approach.*

Network layer: "data plane" roadmap

- Network layer: overview
  - data plane
  - control plane
- What's inside a router
  - input ports, switching, output ports
  - buffer management, scheduling
- IP: the Internet Protocol
  - datagram format
  - addressing
  - network address translation

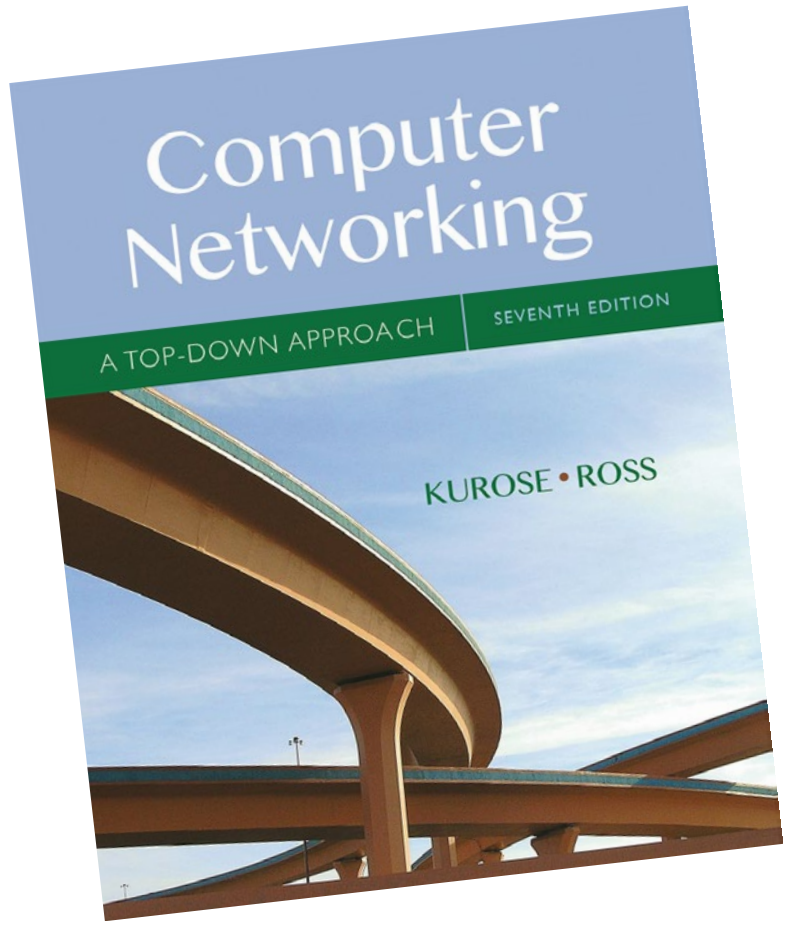

Chapter 4

- Generalized Forwarding, SDN
  - Match+action
  - OpenFlow: match+action in action

Network-layer services and protocols

- transport segment from sending to receiving host
  - sender: encapsulates segments into datagrams, passes to link layer
  - receiver: delivers segments to transport layer protocol
- network layer protocols in *every Internet device*: hosts, routers
- routers:
  - examines header fields in all IP datagrams passing through it
  - moves datagrams from input ports to output ports to transfer datagrams along end-end path

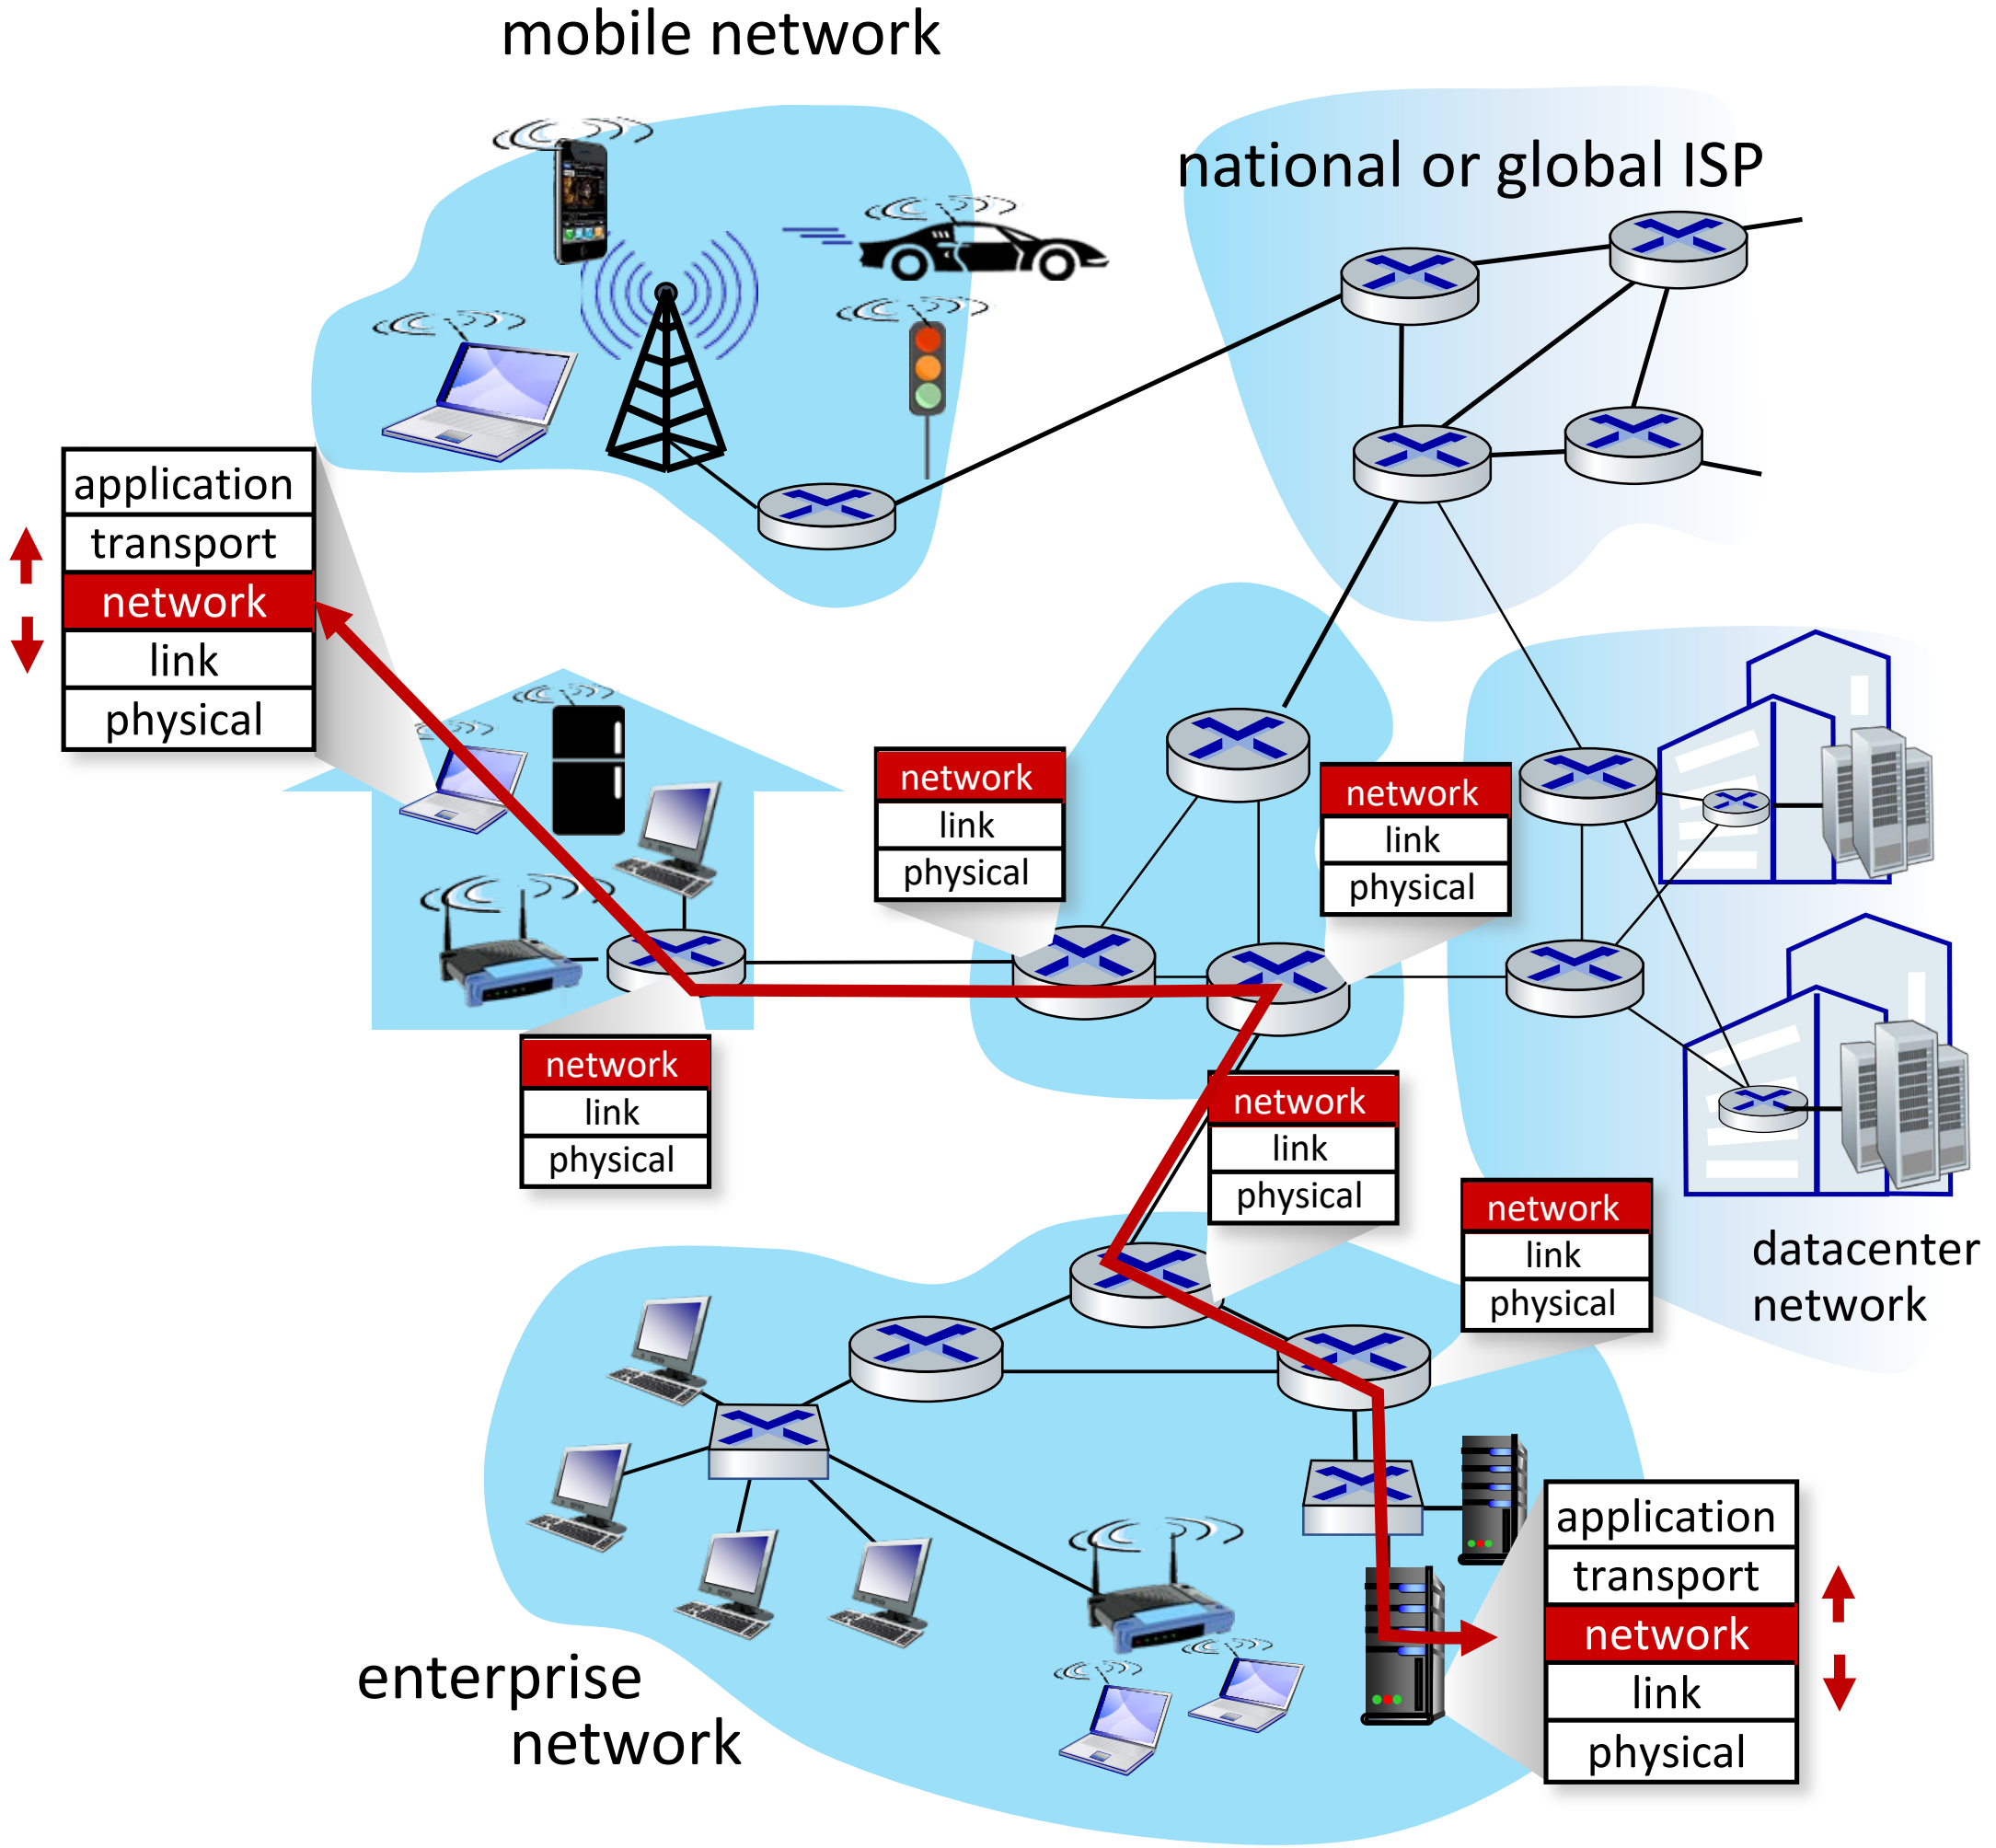

Two key network-layer functions

network-layer functions:

- *forwarding:* move packets from a router's input link to one of its output links
- *routing:* determine route taken by packets from source to destination
  - *routing algorithms*

analogy: taking a trip

- *forwarding:* process of getting through single interchange
- *routing:* process of planning trip from source to destination

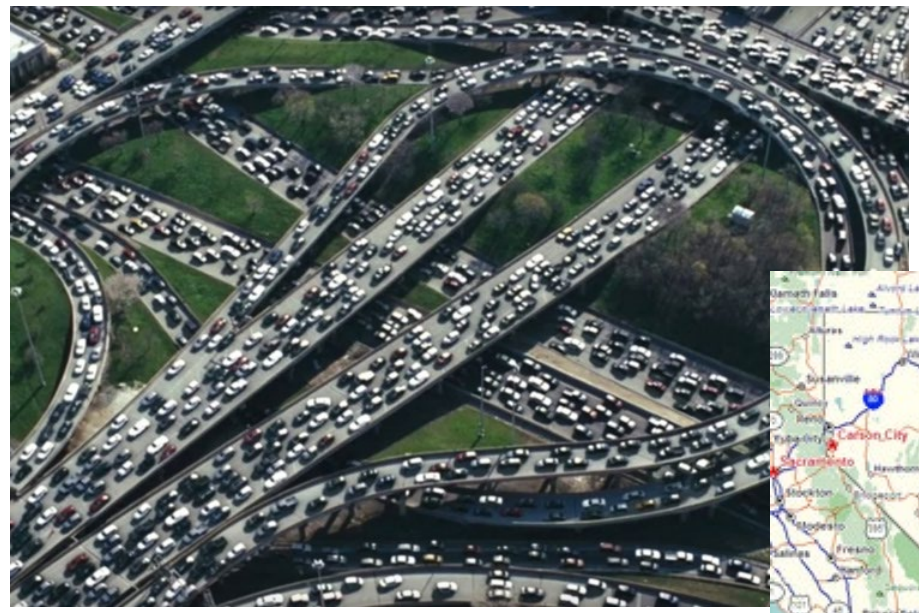

forwarding

routing

Network layer: data plane, control plane

Data plane:

- *local*, per-router function
- determines how datagram arriving on router input port is forwarded to router output port

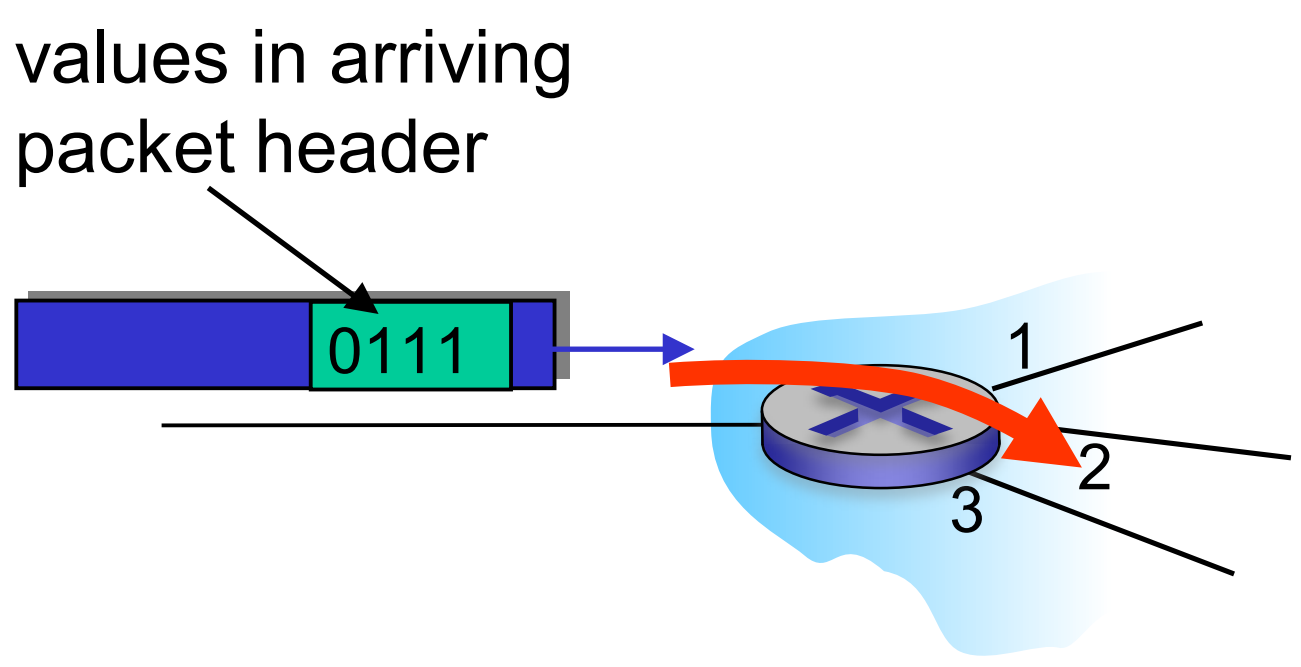

Control plane

- *network-wide* logic
- determines how datagram is routed among routers along end-end path from source host to destination host
- two control-plane approaches:
  - *traditional routing algorithms:* implemented in routers
  - *software-defined networking (SDN)*: implemented in (remote) servers

Per-router control plane

Individual routing algorithm components *in each and every router* interact in the control plane

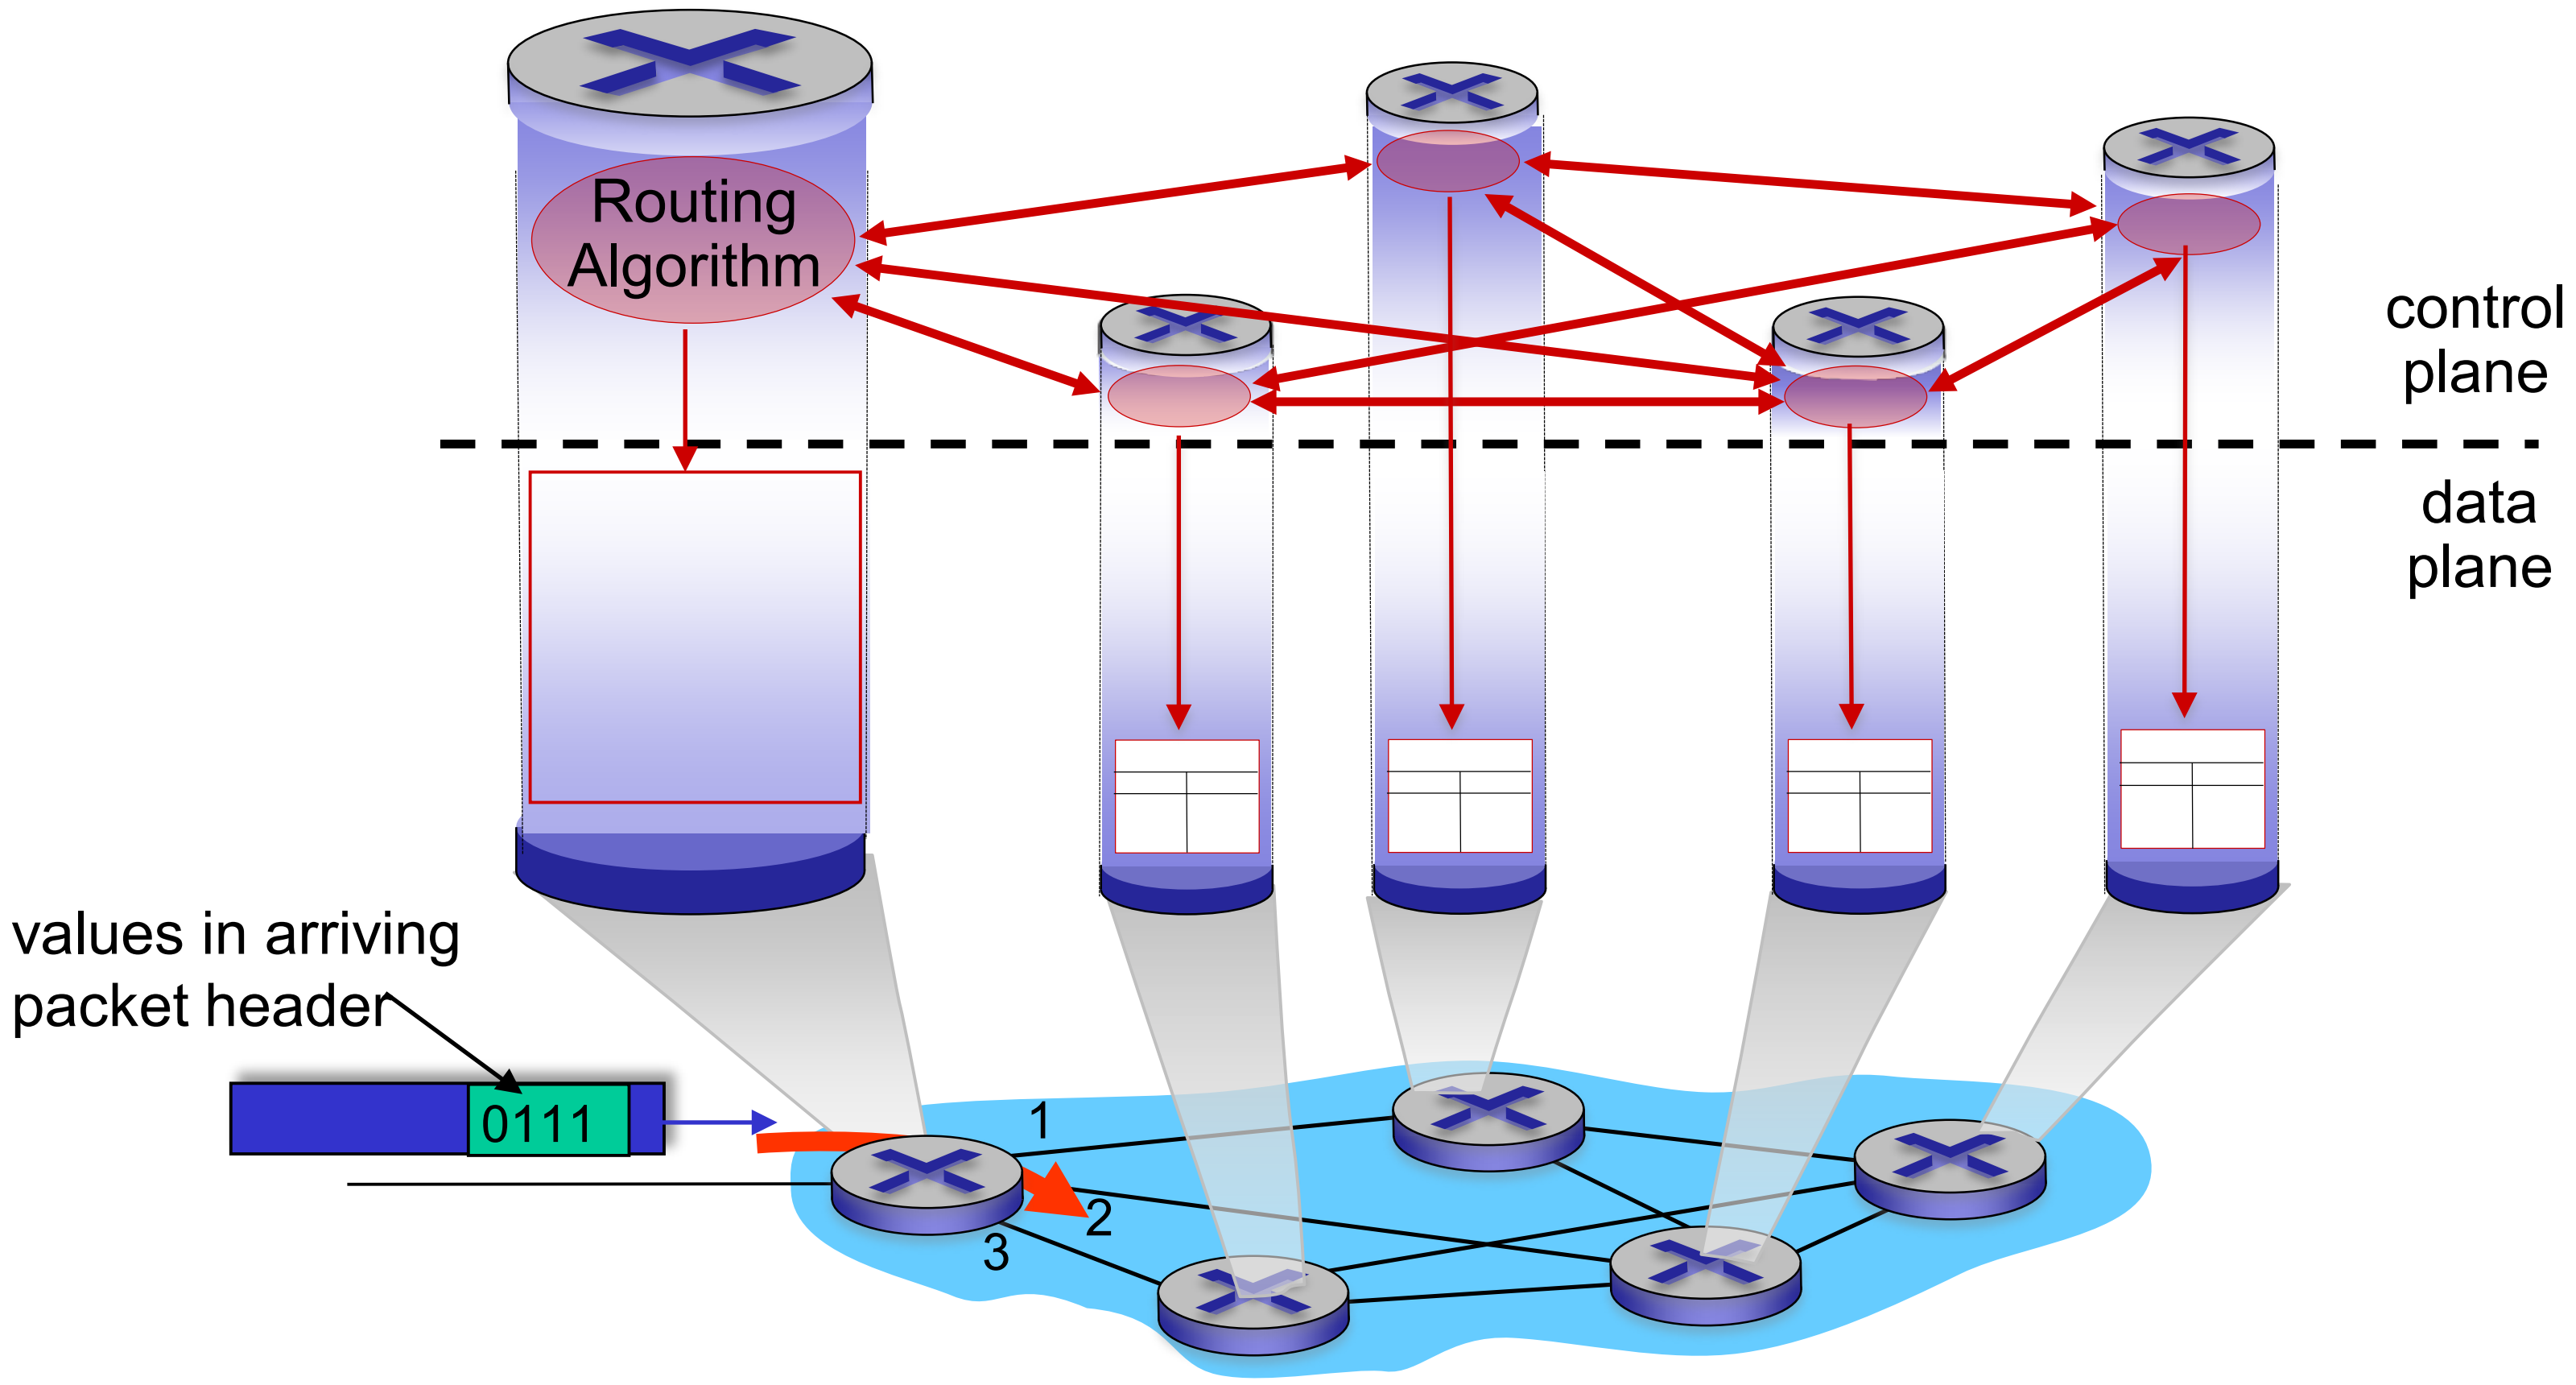

Software-Defined Networking (SDN) control plane

Remote controller computes, installs forwarding tables in routers

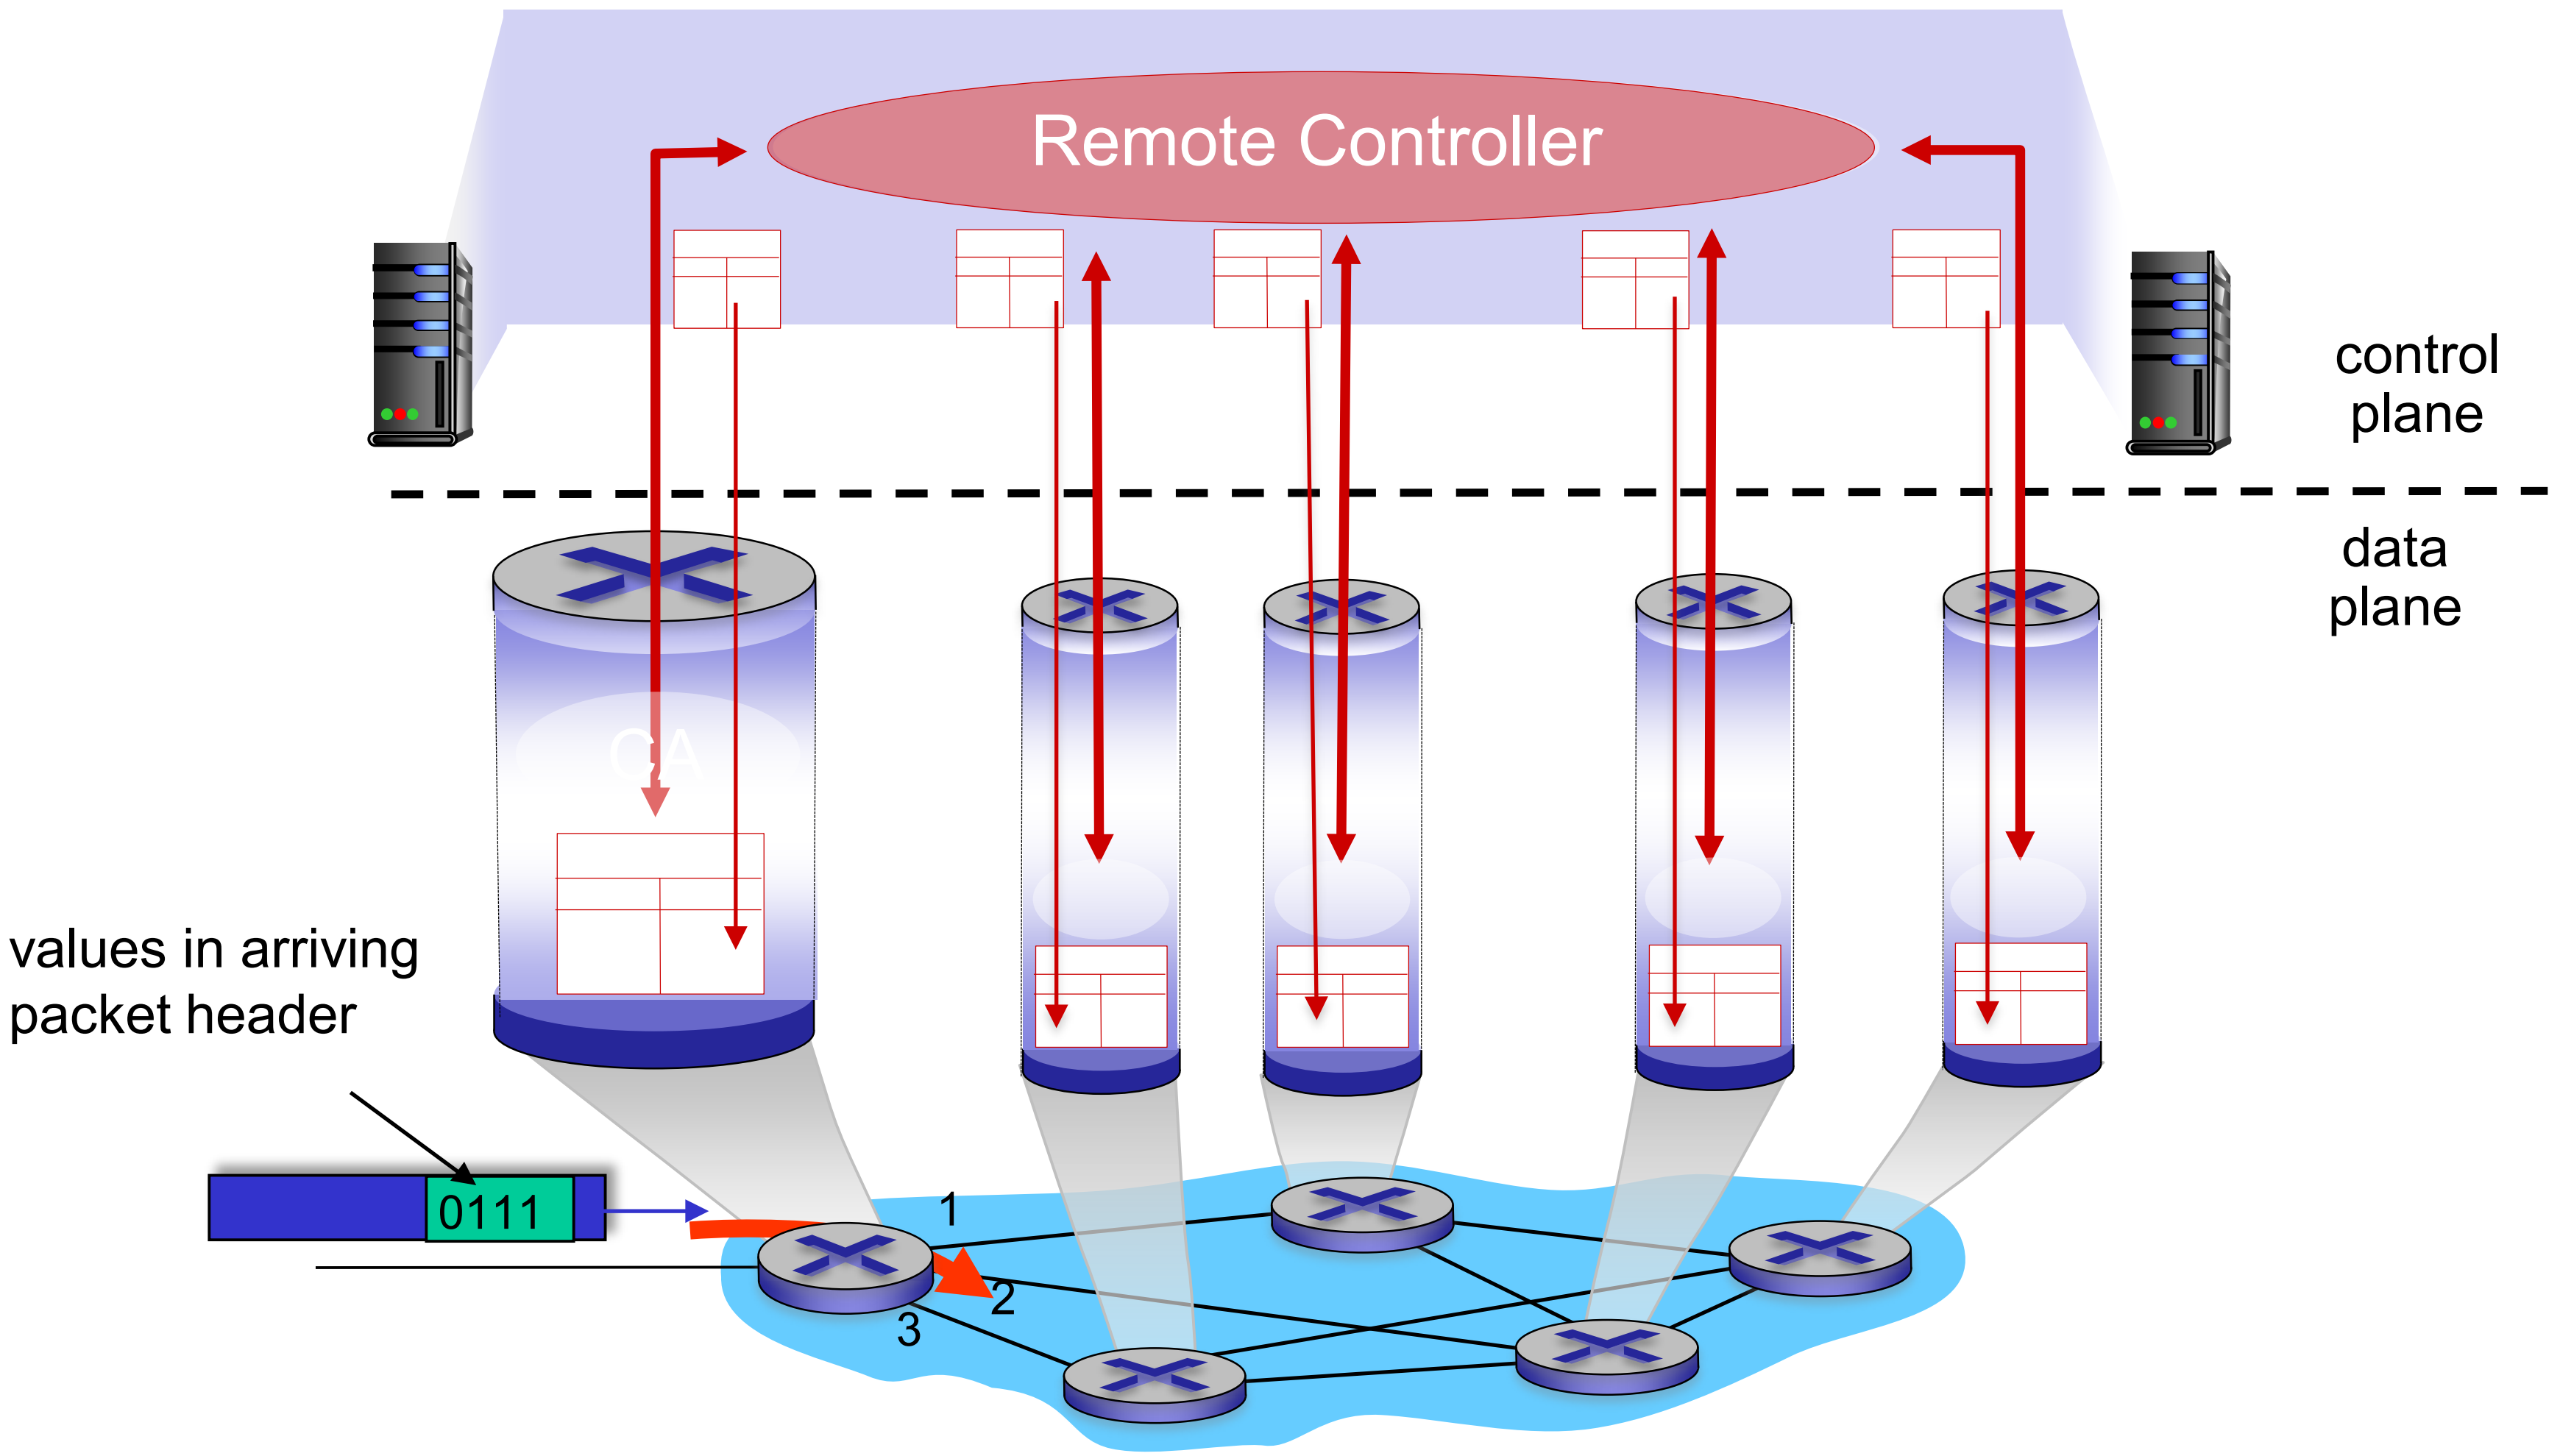

Network service model

Q: What *service model* for "channel" transporting datagrams from sender to receiver?

example services for *individual* datagrams:

- guaranteed delivery
- guaranteed delivery with less than 40 msec delay

example services for a *flow* of datagrams:

- in-order datagram delivery
- guaranteed minimum bandwidth to flow
- restrictions on changes in inter-packet spacing

Network-layer service model

Network Architecture	Service Model	Quality of Service (QoS) Guarantees ?			
		Bandwidth	Loss	Order	Timing
Internet	best effort	none	no	no	no

Internet "best effort" service model

No guarantees on*:*

i. successful datagram delivery to destination
ii. timing or order of delivery
iii. bandwidth available to end-end flow

Network layer: “data plane” roadmap

- Network layer: overview
  - data plane
  - control plane
- What’s inside a router
  - input ports, switching, output ports
  - buffer management, scheduling
- IP: the Internet Protocol
  - datagram format
  - addressing
  - network address translation
- Generalized Forwarding, SDN
  - Match+action
  - OpenFlow: match+action in action

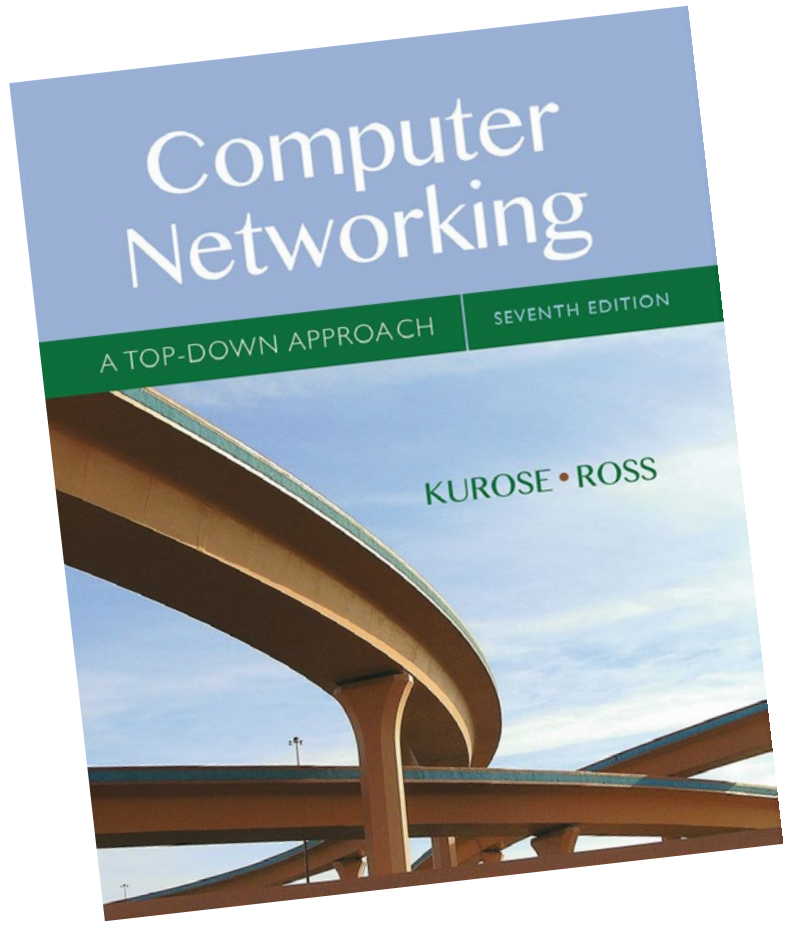

Chapter 4

Router architecture overview

high-level view of generic router architecture:

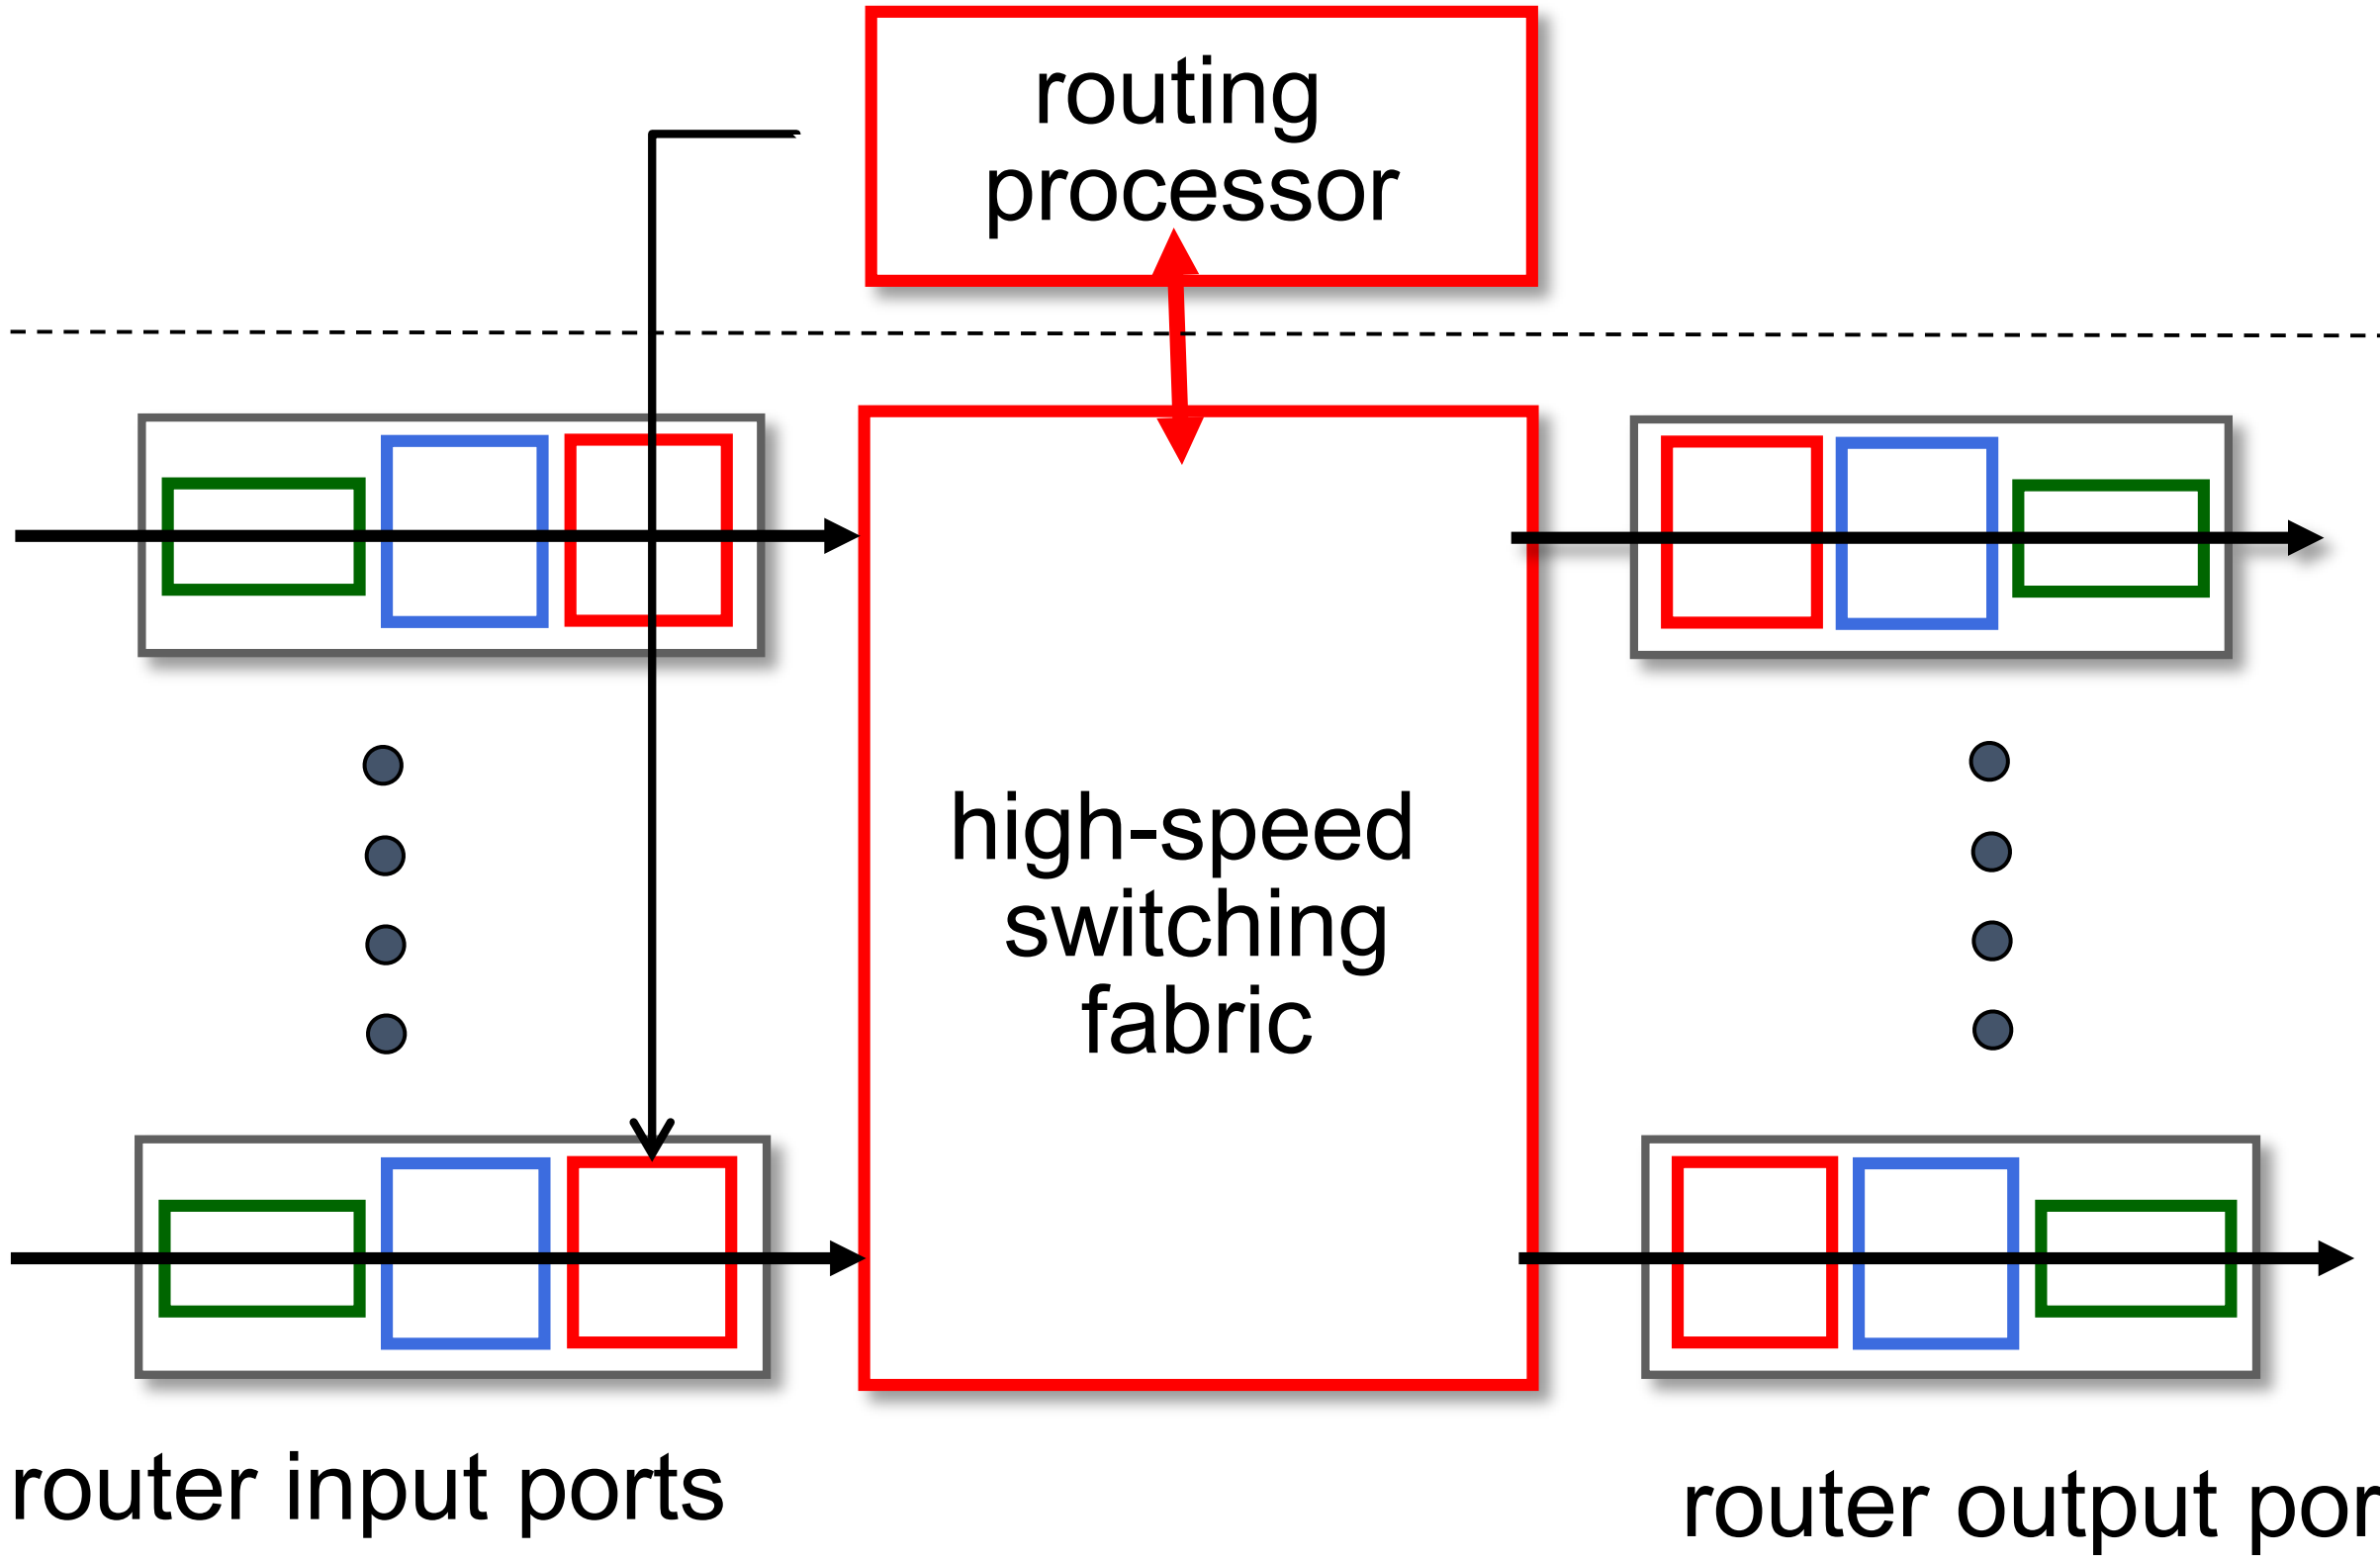

routing, management control plane (software) operates in millisecond time frame

forwarding data plane (hardware) operates in nanosecond timeframe

Input port functions

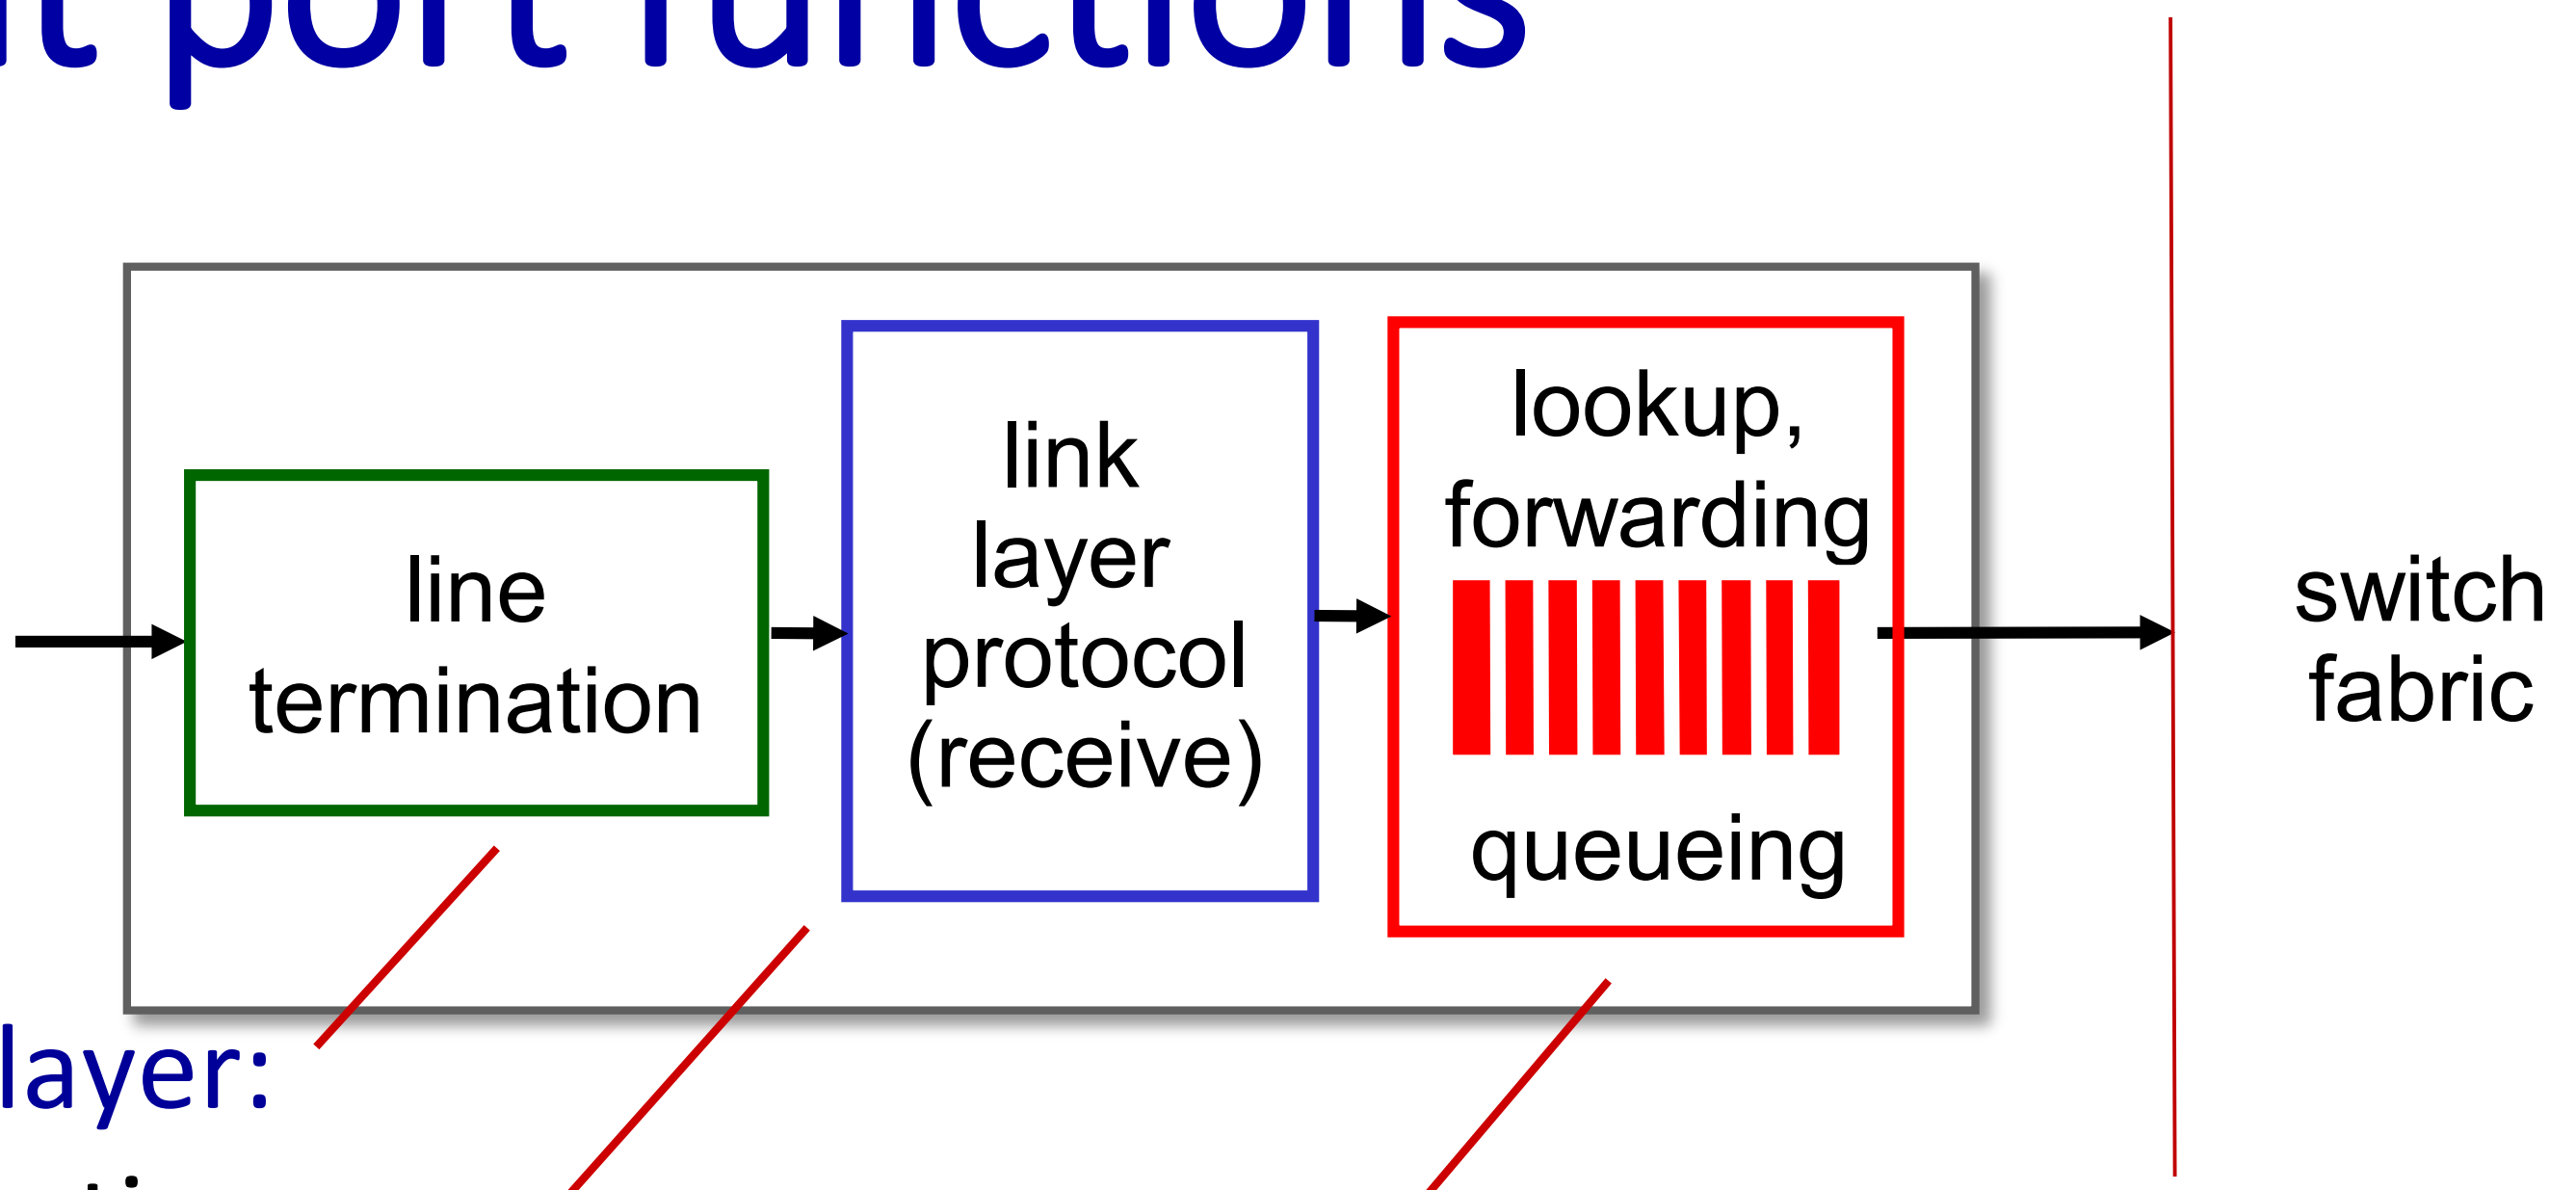

physical layer:
bit-level reception

link layer:
e.g., Ethernet

decentralized switching:

- using header field values, lookup output port using forwarding table in input port memory *("match plus action")*
- goal: complete input port processing at 'line speed'
- input port queuing: if datagrams arrive faster than forwarding rate into switch fabric

Input port functions

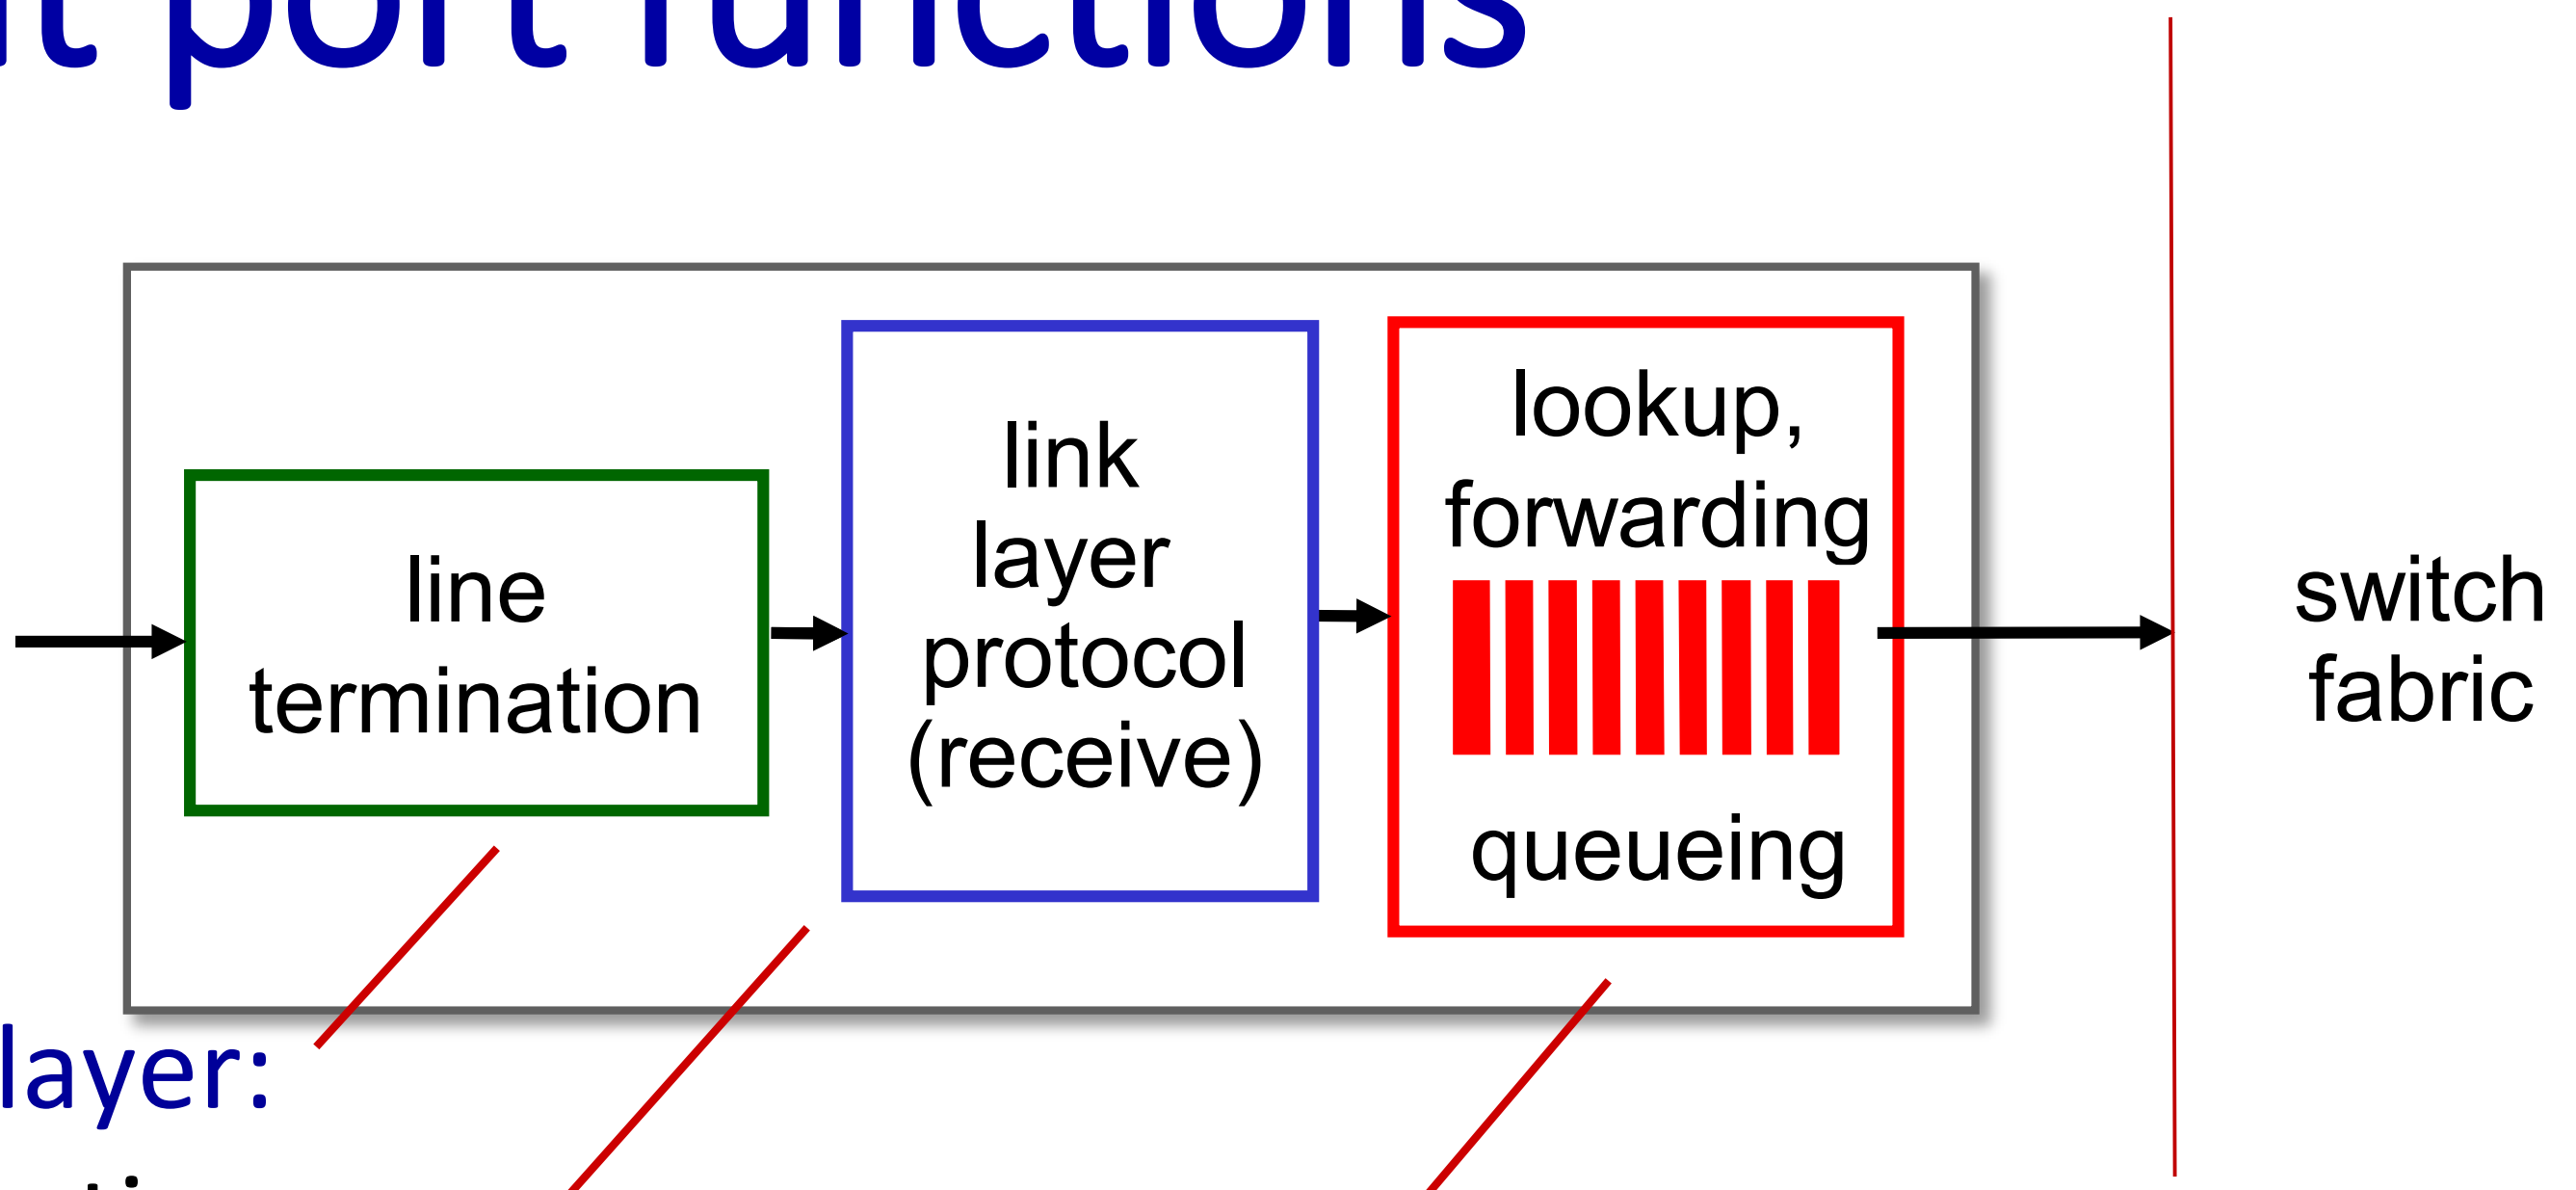

physical layer: bit-level reception

link layer: e.g., Ethernet

decentralized switching:

- using header field values, lookup output port using forwarding table in input port memory *("match plus action")*
- destination-based forwarding: forward based only on destination IP address (traditional)
- generalized forwarding: forward based on any set of header field values

Destination-based forwarding

forwarding table

Destination Address Range	Link Interface
11001000 00010111 00010000 00000000 through 11001000 00010111 00010111 11111111	0
11001000 00010111 00011000 00000000 through 11001000 00010111 00011000 11111111	1
11001000 00010111 00011001 00000000 through 11001000 00010111 00011111 11111111	2
otherwise	3

Q: but what happens if ranges don't divide up so nicely?

Longest prefix matching

longest prefix match

when looking for forwarding table entry for given destination address, use the *longest* address prefix that matches destination address.

Destination Address Range	Link interface
11001000 00010111 00010*** ********	0
11001000 00010111 00011000 ********	1
11001000 00010111 00011*** ********	2
otherwise	3

examples:

11001000 00010111 00010110 10100001 which interface?

11001000 00010111 00011000 10101010 which interface?

Longest prefix matching

longest prefix match

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range	Link interface
11001000 00010111 00010*** ********	0
11001000 00010111 00011000 ********	1
11001000 00010111 00011*** ********	2
otherwise	3

match!

examples:

11001000 00010111 00010110 10100001 which interface?

11001000 00010111 00011000 10101010 which interface?

Longest prefix matching

longest prefix match

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range	Link interface
11001000 00010111 00010*** ********	0
11001000 00010111 00011000 ********	1
11001000 00010111 00011*** ********	2
otherwise	3

match!

examples:

11001000 00010111 00010110 10100001	which interface?
11001000 00010111 00011000 10101010	which interface?

Longest prefix matching

longest prefix match

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range				Link interface
11001000	00010111	00010***	********	0
11001000	00010111	00011000	********	1
11001000	00010111	00011***	********	2
otherwise				3

match!

examples:

11001000	00010111	00010110	10100001	which interface?
11001000	00010111	00011000	10101010	which interface?

Switching fabrics

- transfer packet from an input link to an appropriate output link
- switching rate: the rate at which can be transferred from input ports to output ports
  - often measured as multiple of input/output line rate
  - N inputs: switching rate N times line rate desirable

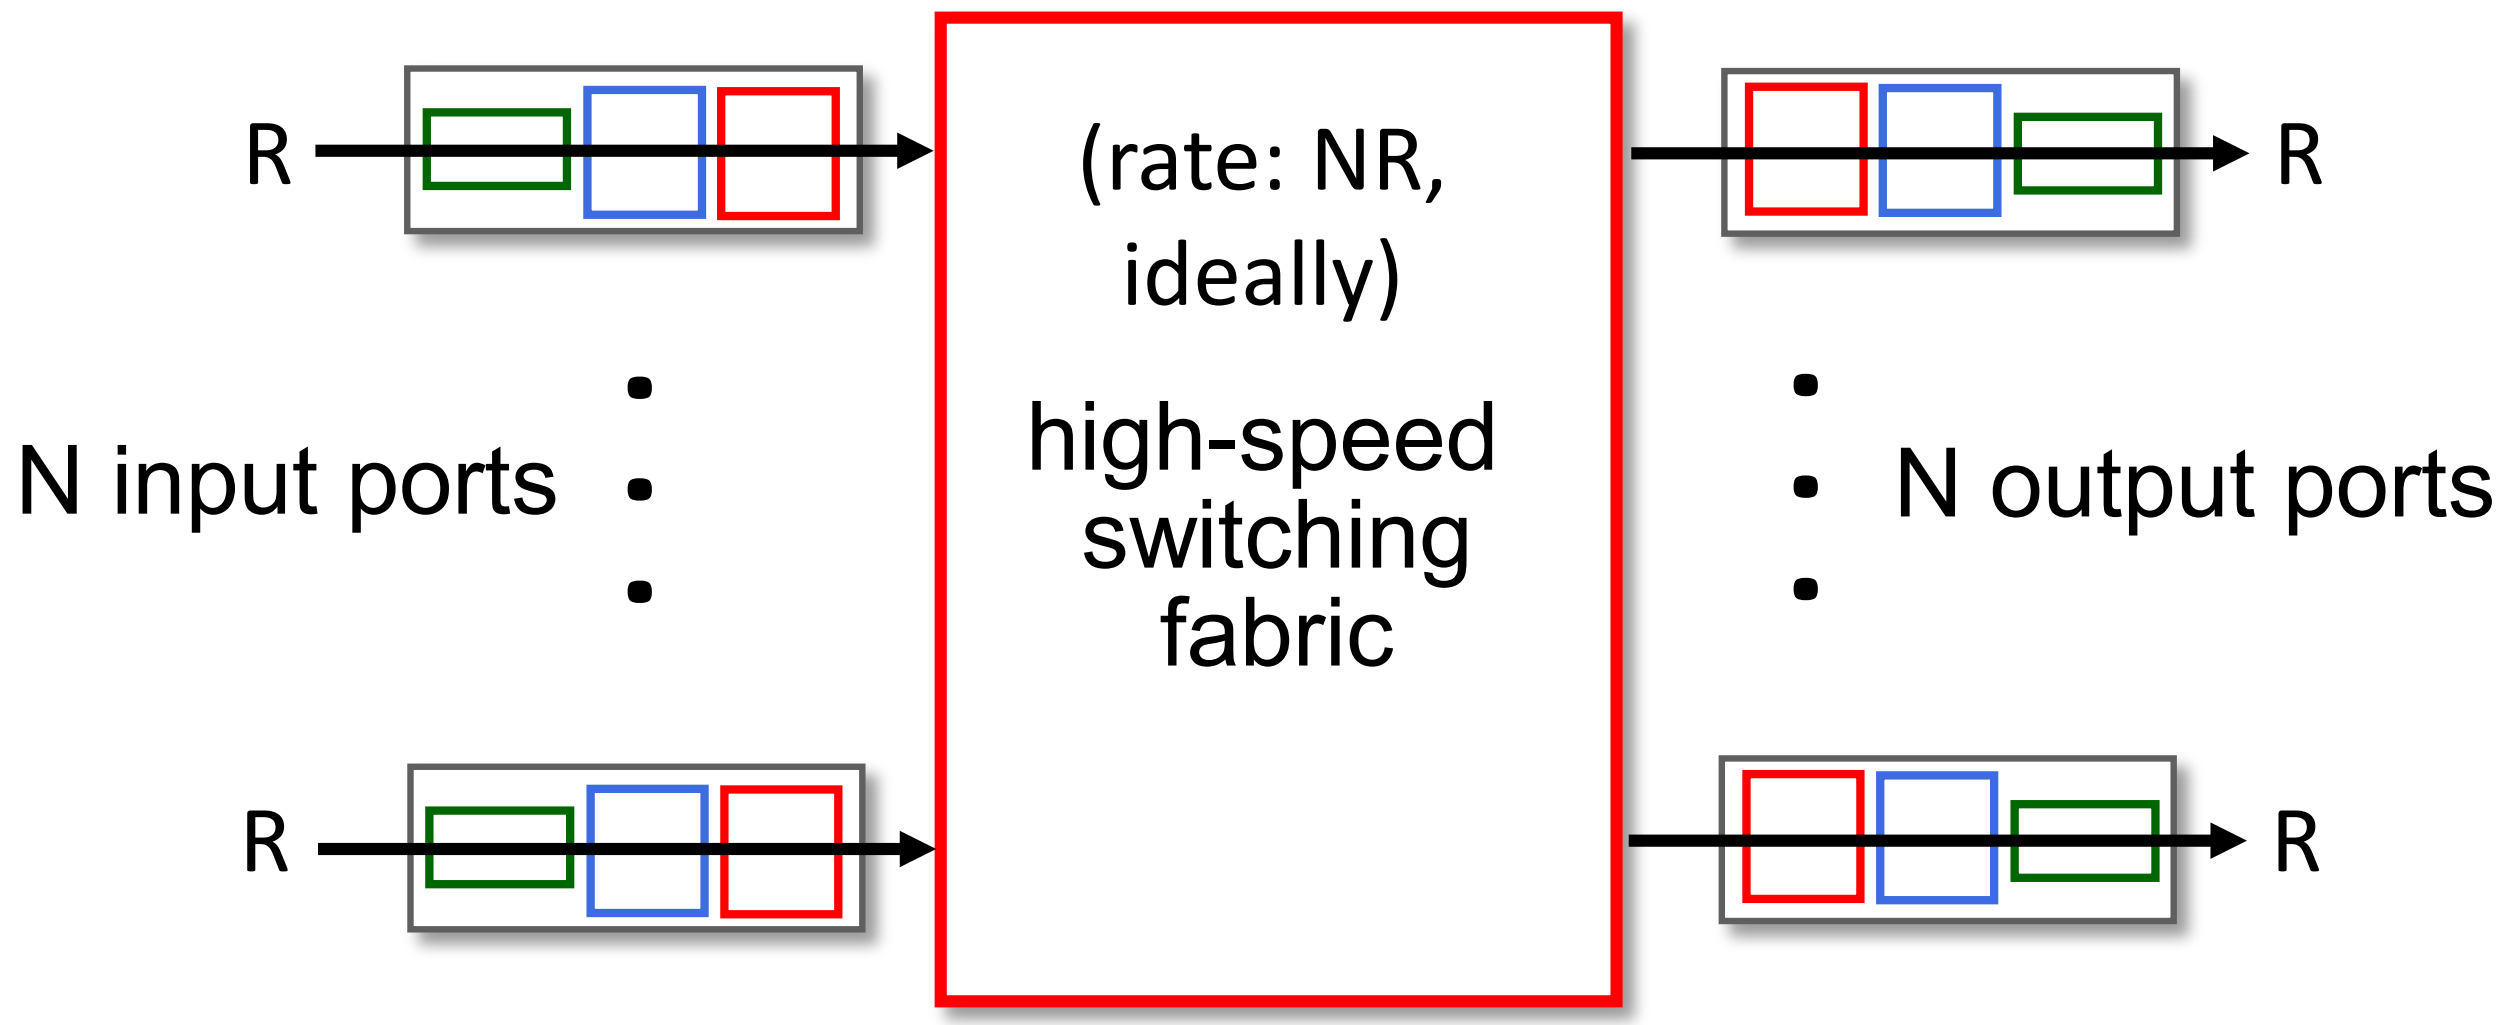

Input port queuing

- If switch fabric slower than input ports combined -> queueing may occur at input queues
  - queueing delay and loss due to input buffer overflow!
- Head-of-the-Line (HOL) blocking: queued datagram at front of queue prevents others in queue from moving forward

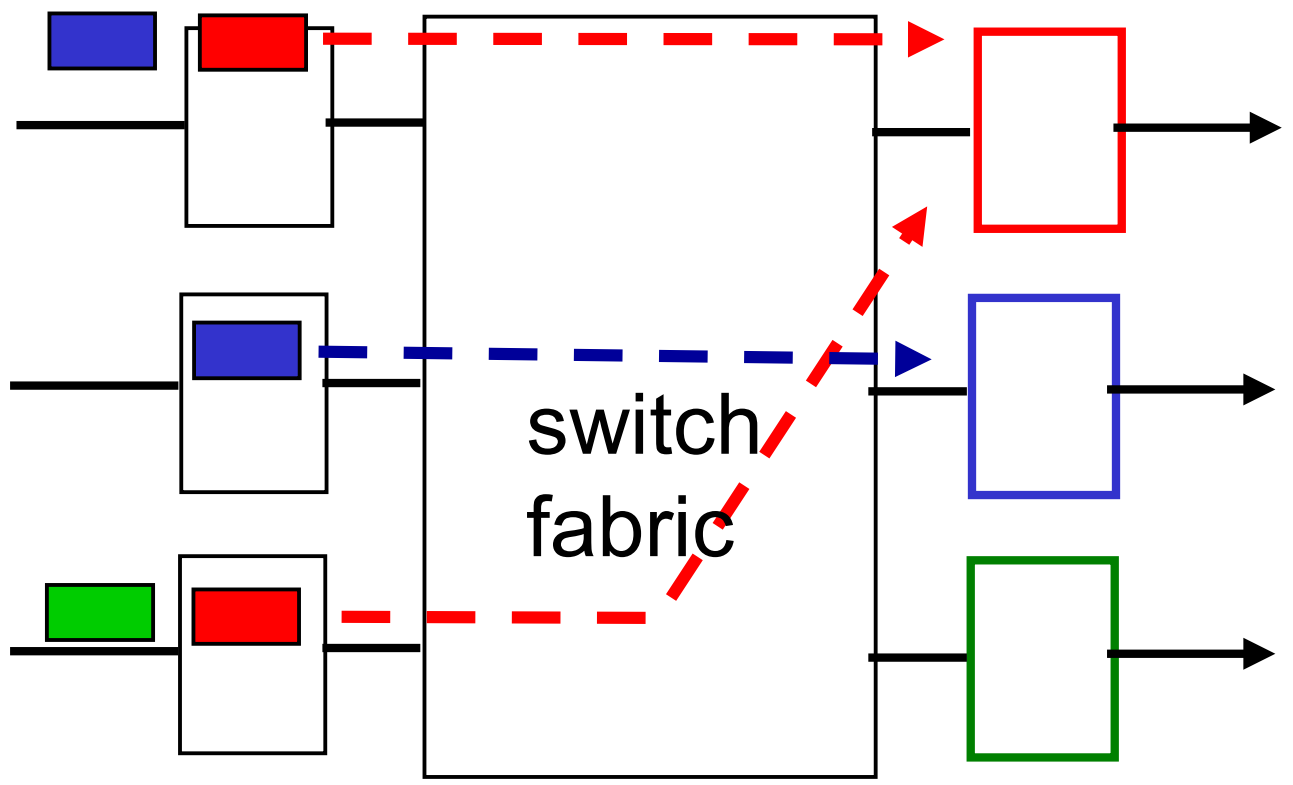

output port contention: only one red datagram can be transferred. lower red packet is *blocked*

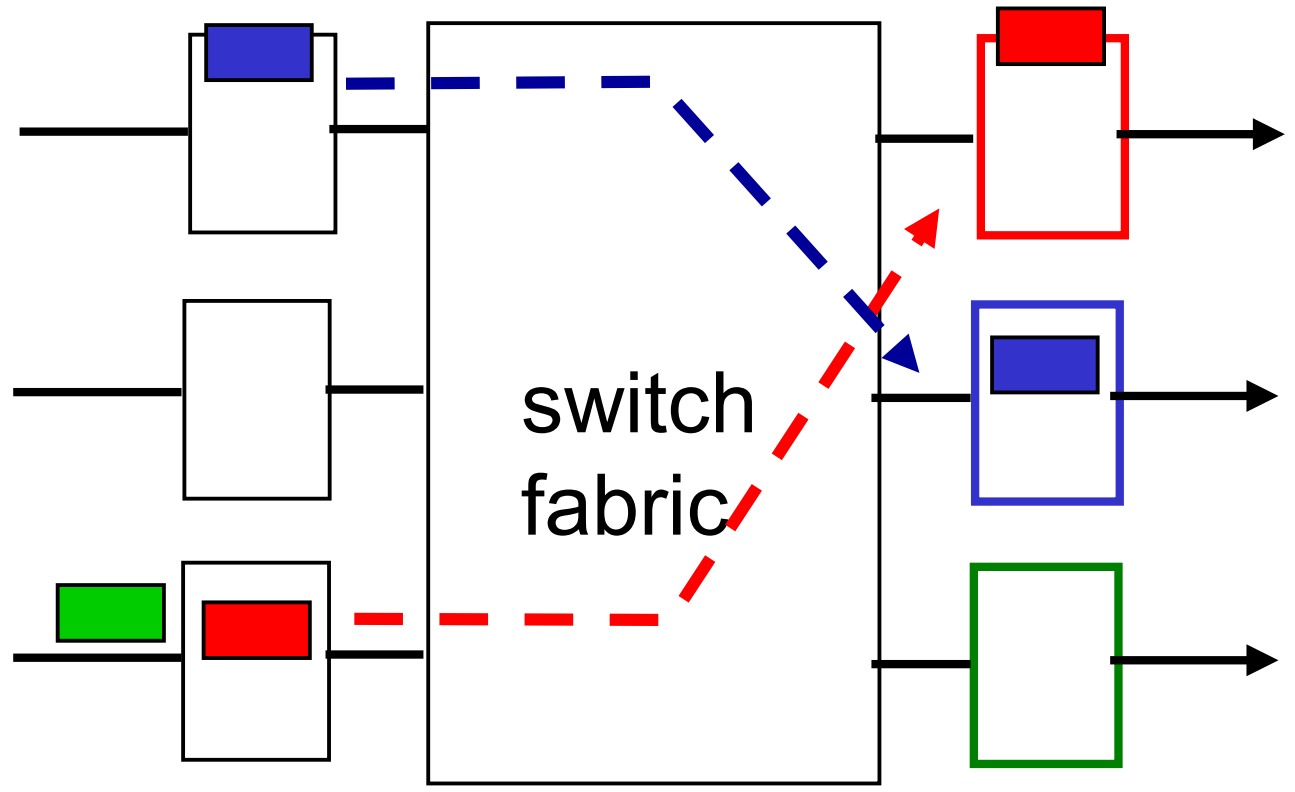

one packet time later: green packet experiences HOL blocking

Output port queuing

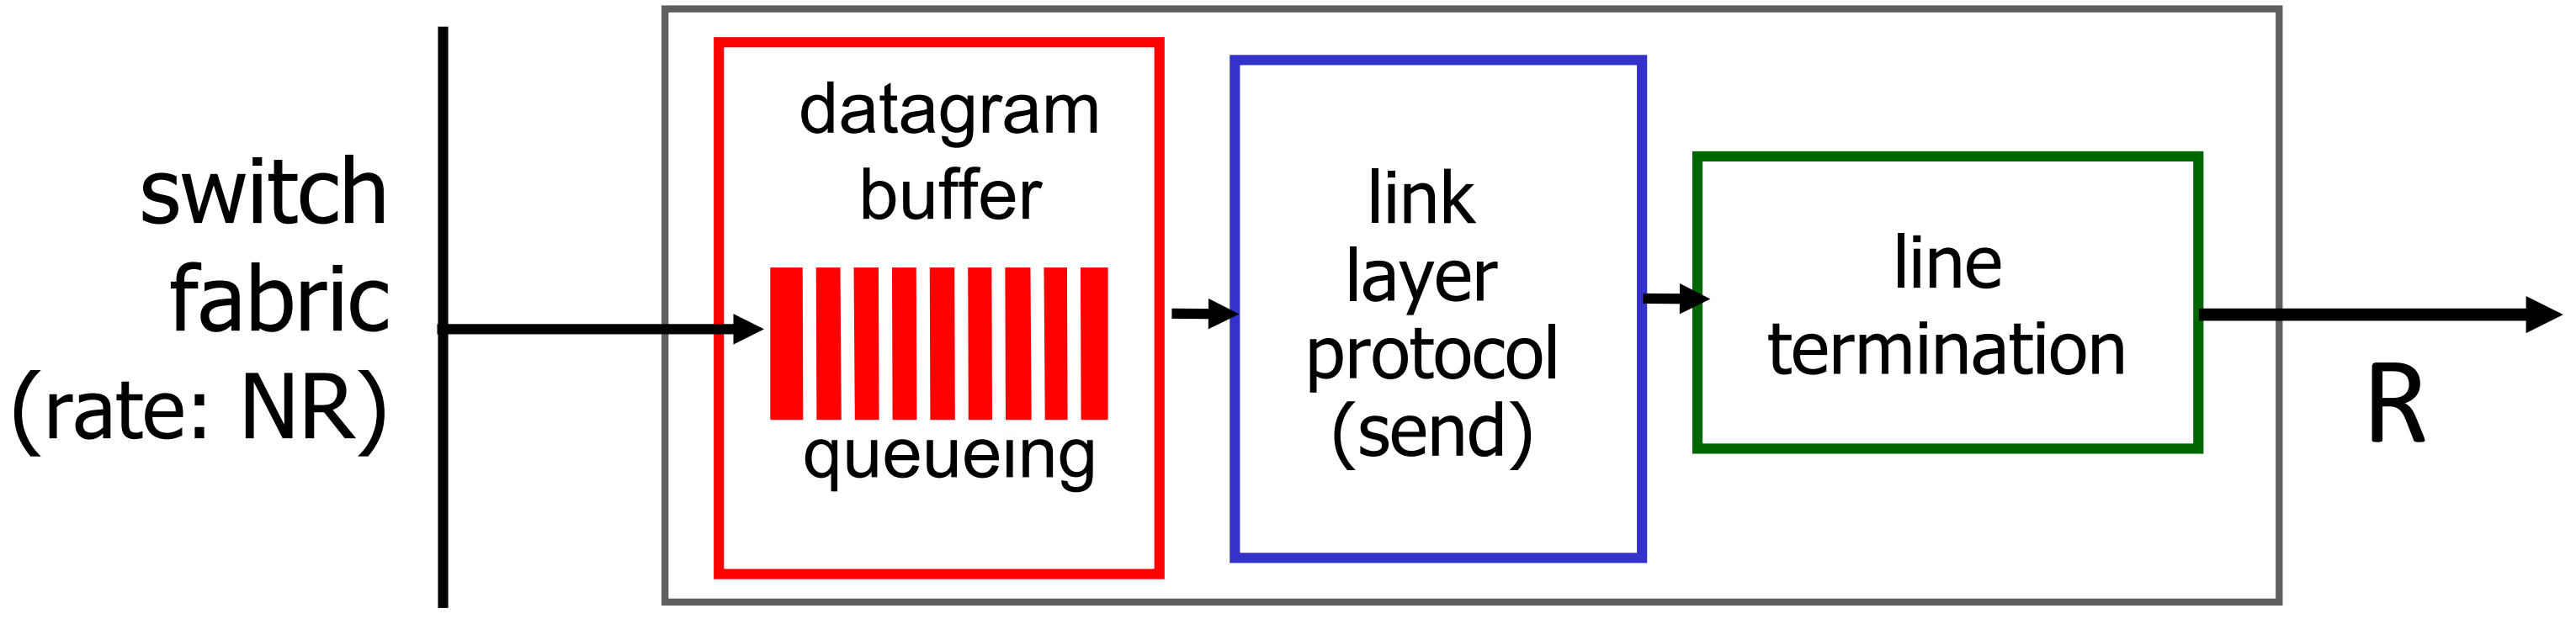

- *Buffering* required when datagrams arrive from fabric faster than link transmission rate. *Drop policy:* which datagrams to drop if no free buffers?

Datagrams can be lost due to congestion, lack of buffers

- *Scheduling discipline* chooses among queued datagrams for transmission

Priority scheduling – who gets best performance, network neutrality

Output port queuing

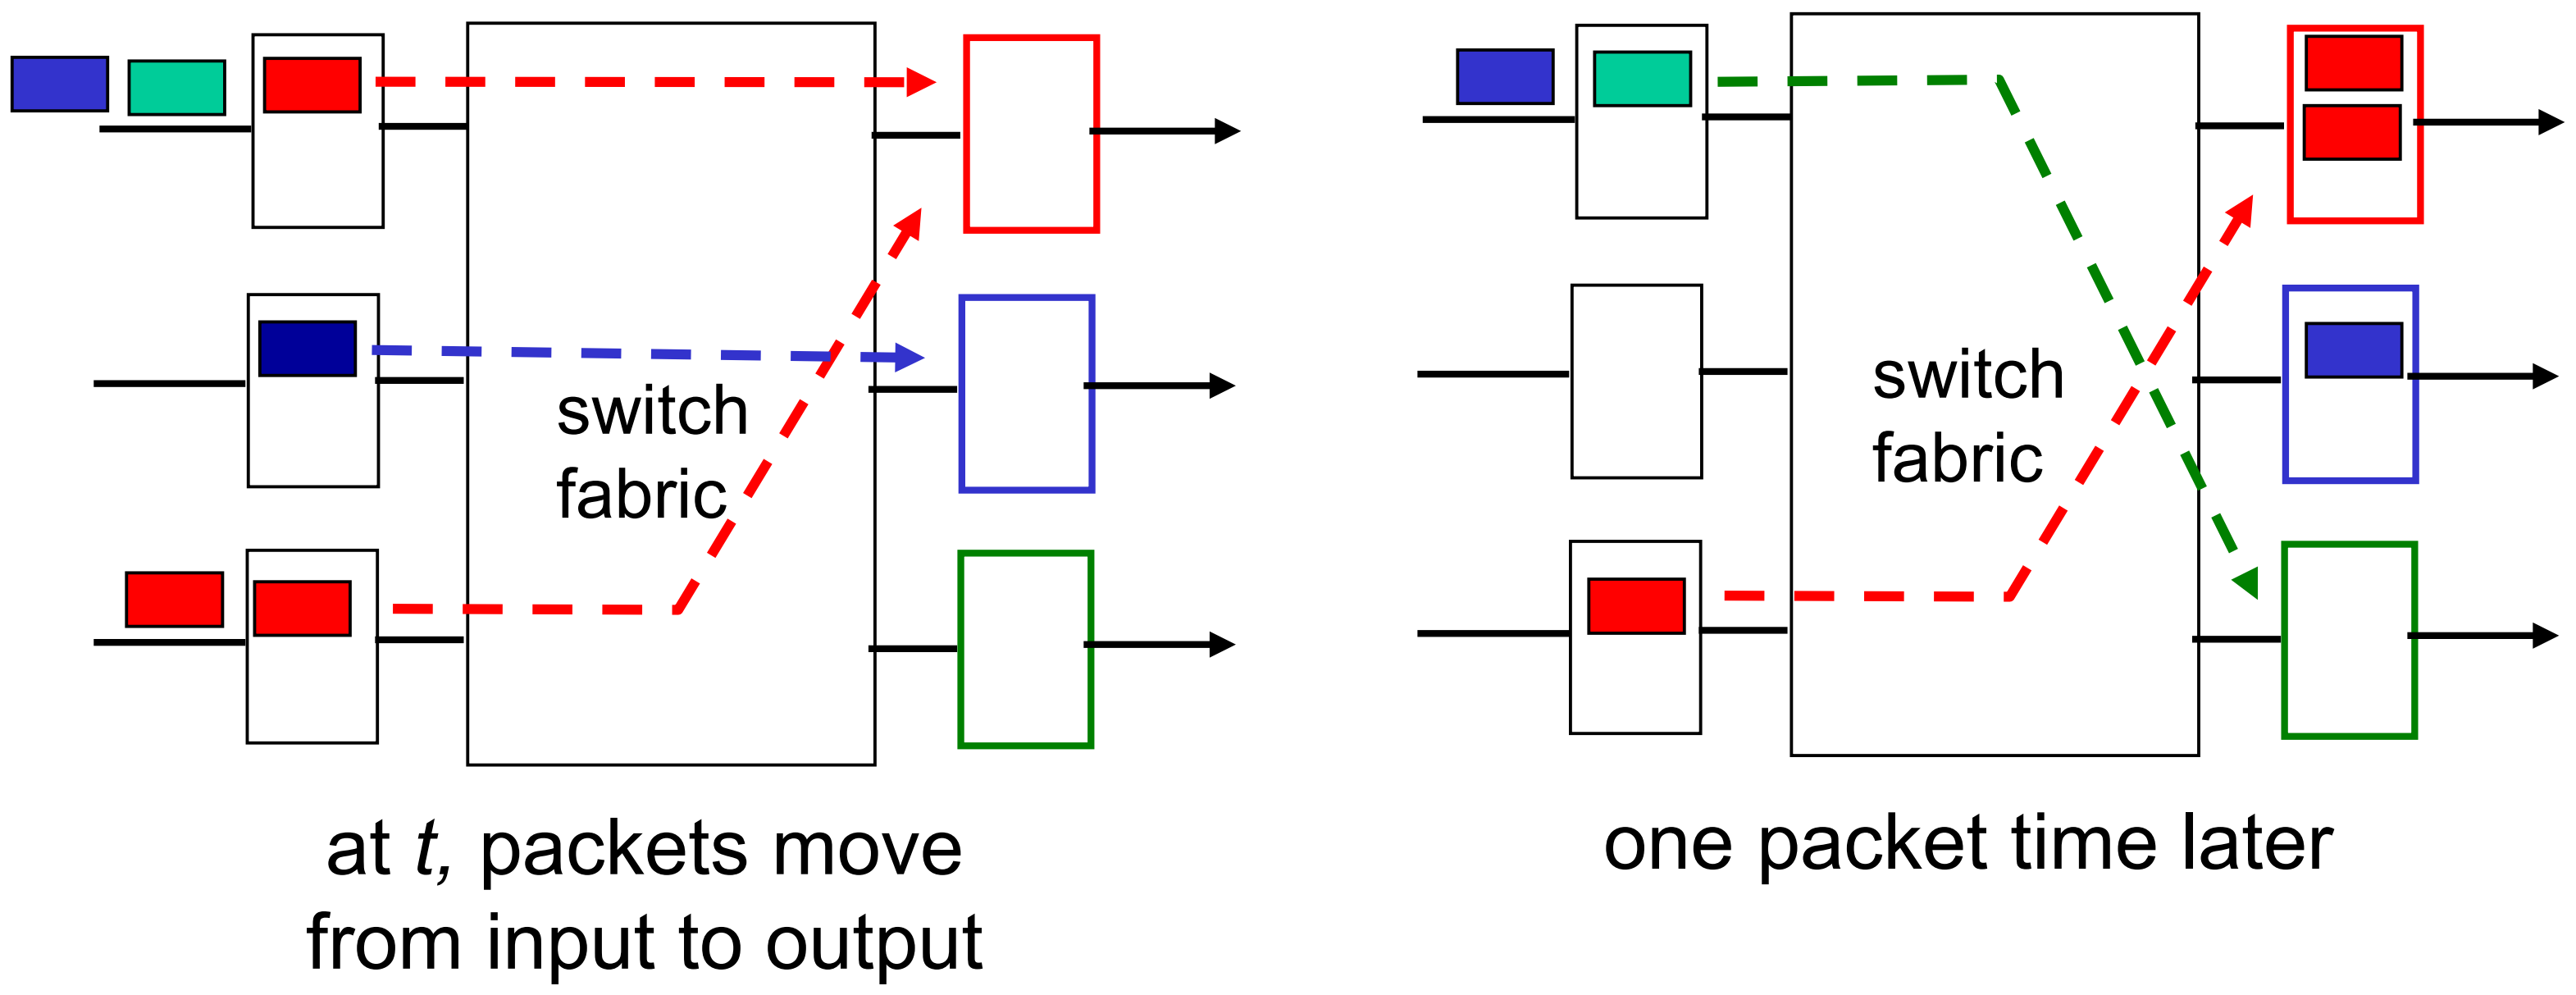

- buffering when arrival rate via switch exceeds output line speed
- *queueing (delay) and loss due to output port buffer overflow!*

Packet Scheduling: FCFS

packet scheduling: deciding which packet to send next on link

- first come, first served
- priority
- round robin
- weighted fair queueing

Abstraction: queue

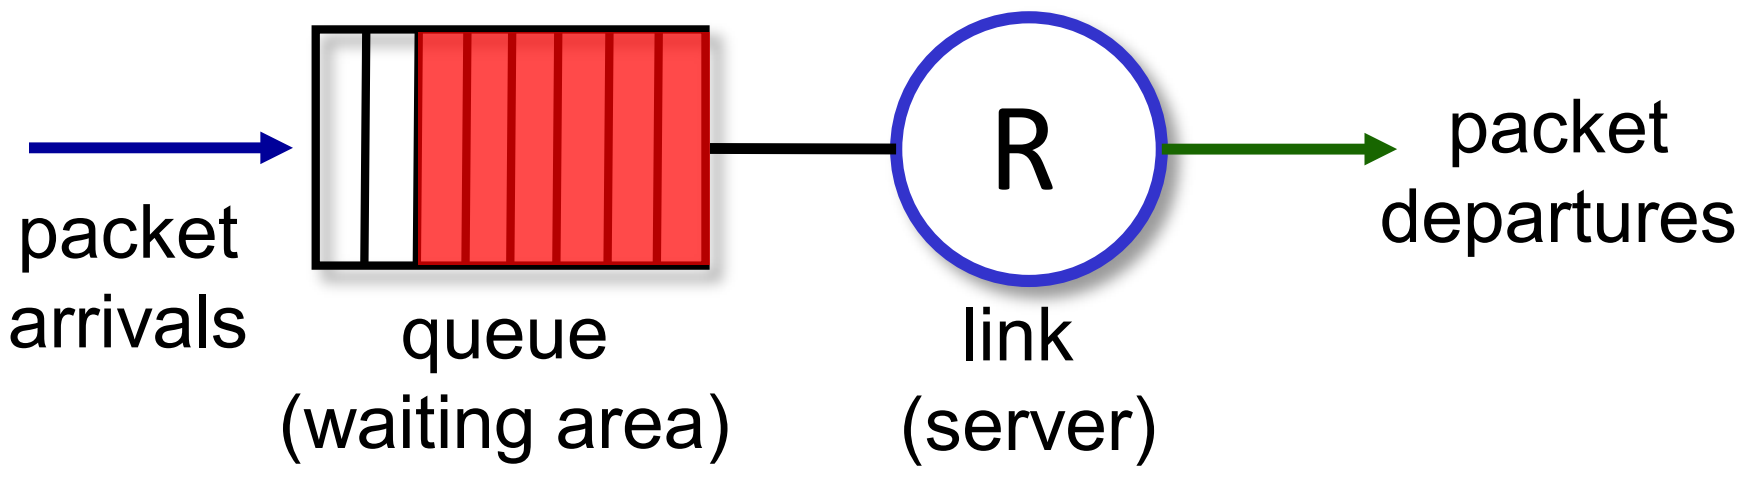

FCFS: packets transmitted in order of arrival to output port

- also known as: First-in-first-out (FIFO)
- Many real world examples

Scheduling policies: priority

- arriving traffic classified, queued by class
  - any header fields can be used for classification
- send packet from highest priority queue that has buffered packets
  - FCFS within priority class

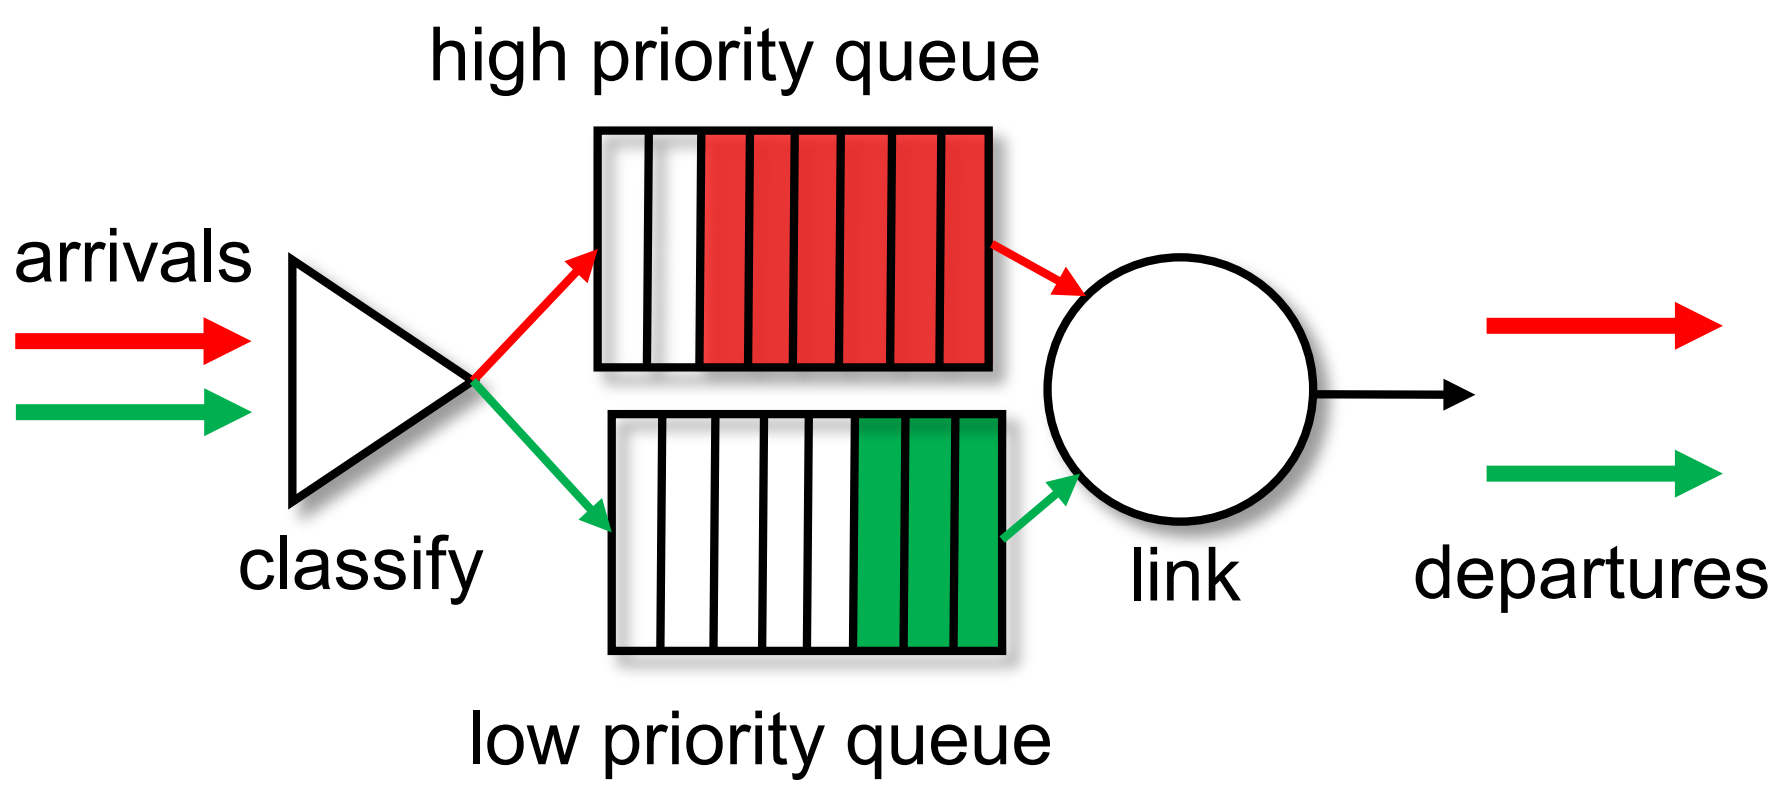

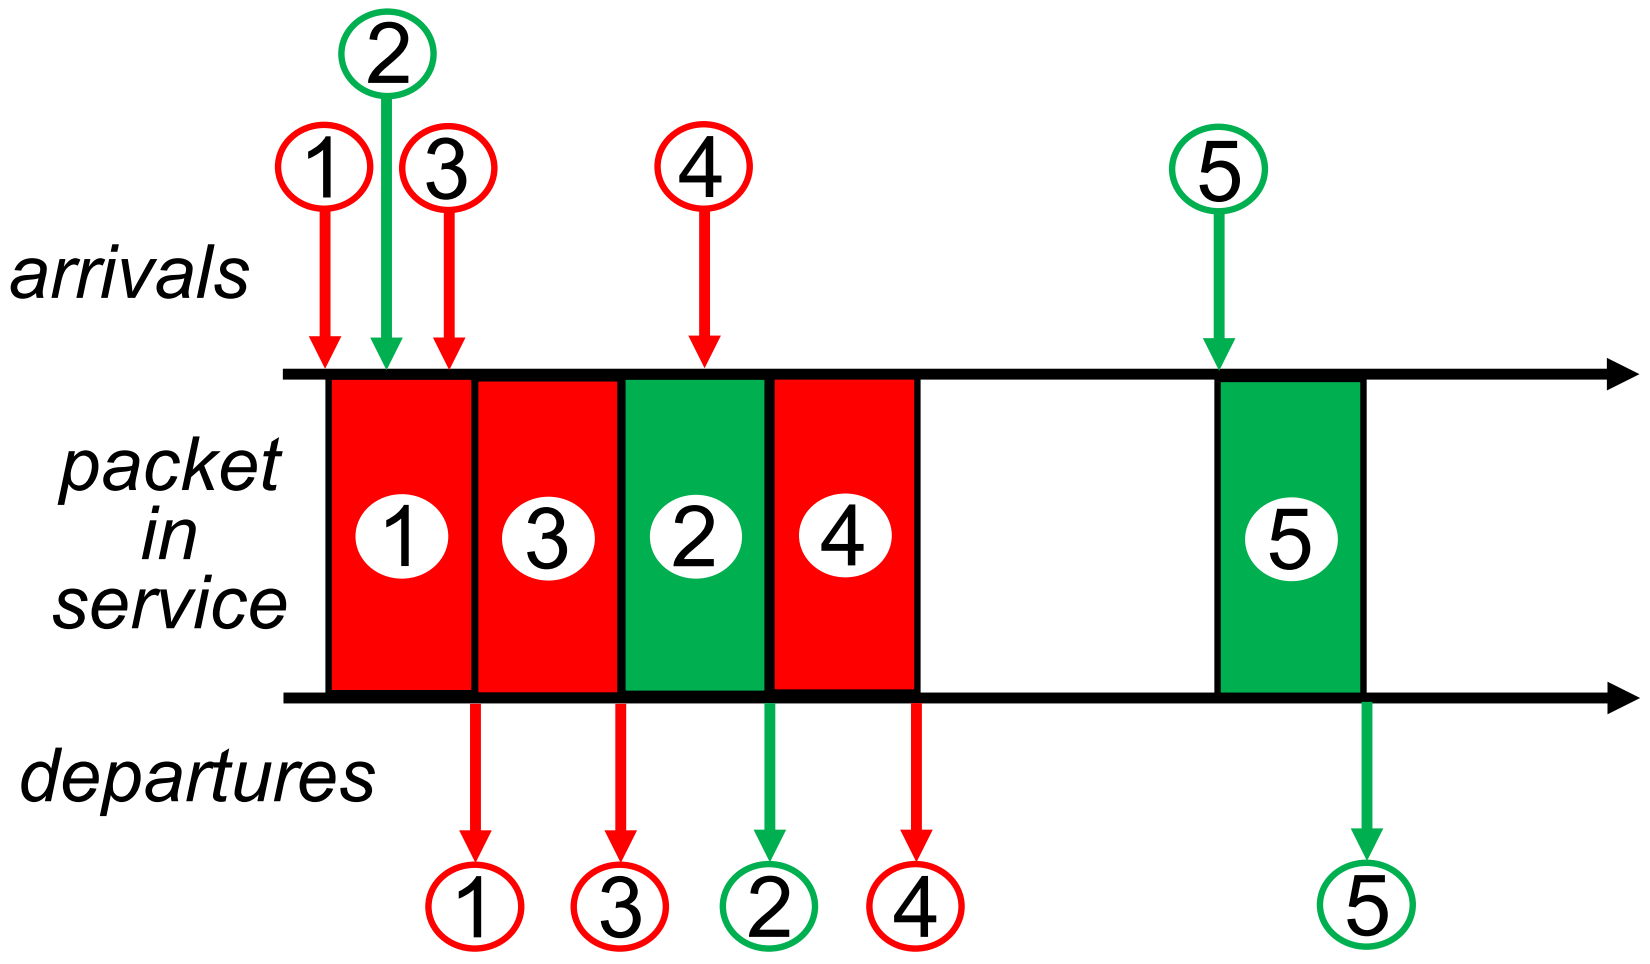

Scheduling policies: round robin (RR)

- arriving traffic classified, queued by class
  - any header fields can be used for classification
- Process class queues in cyclic fashion
- sending one (complete) packet from each class (if available) in turn

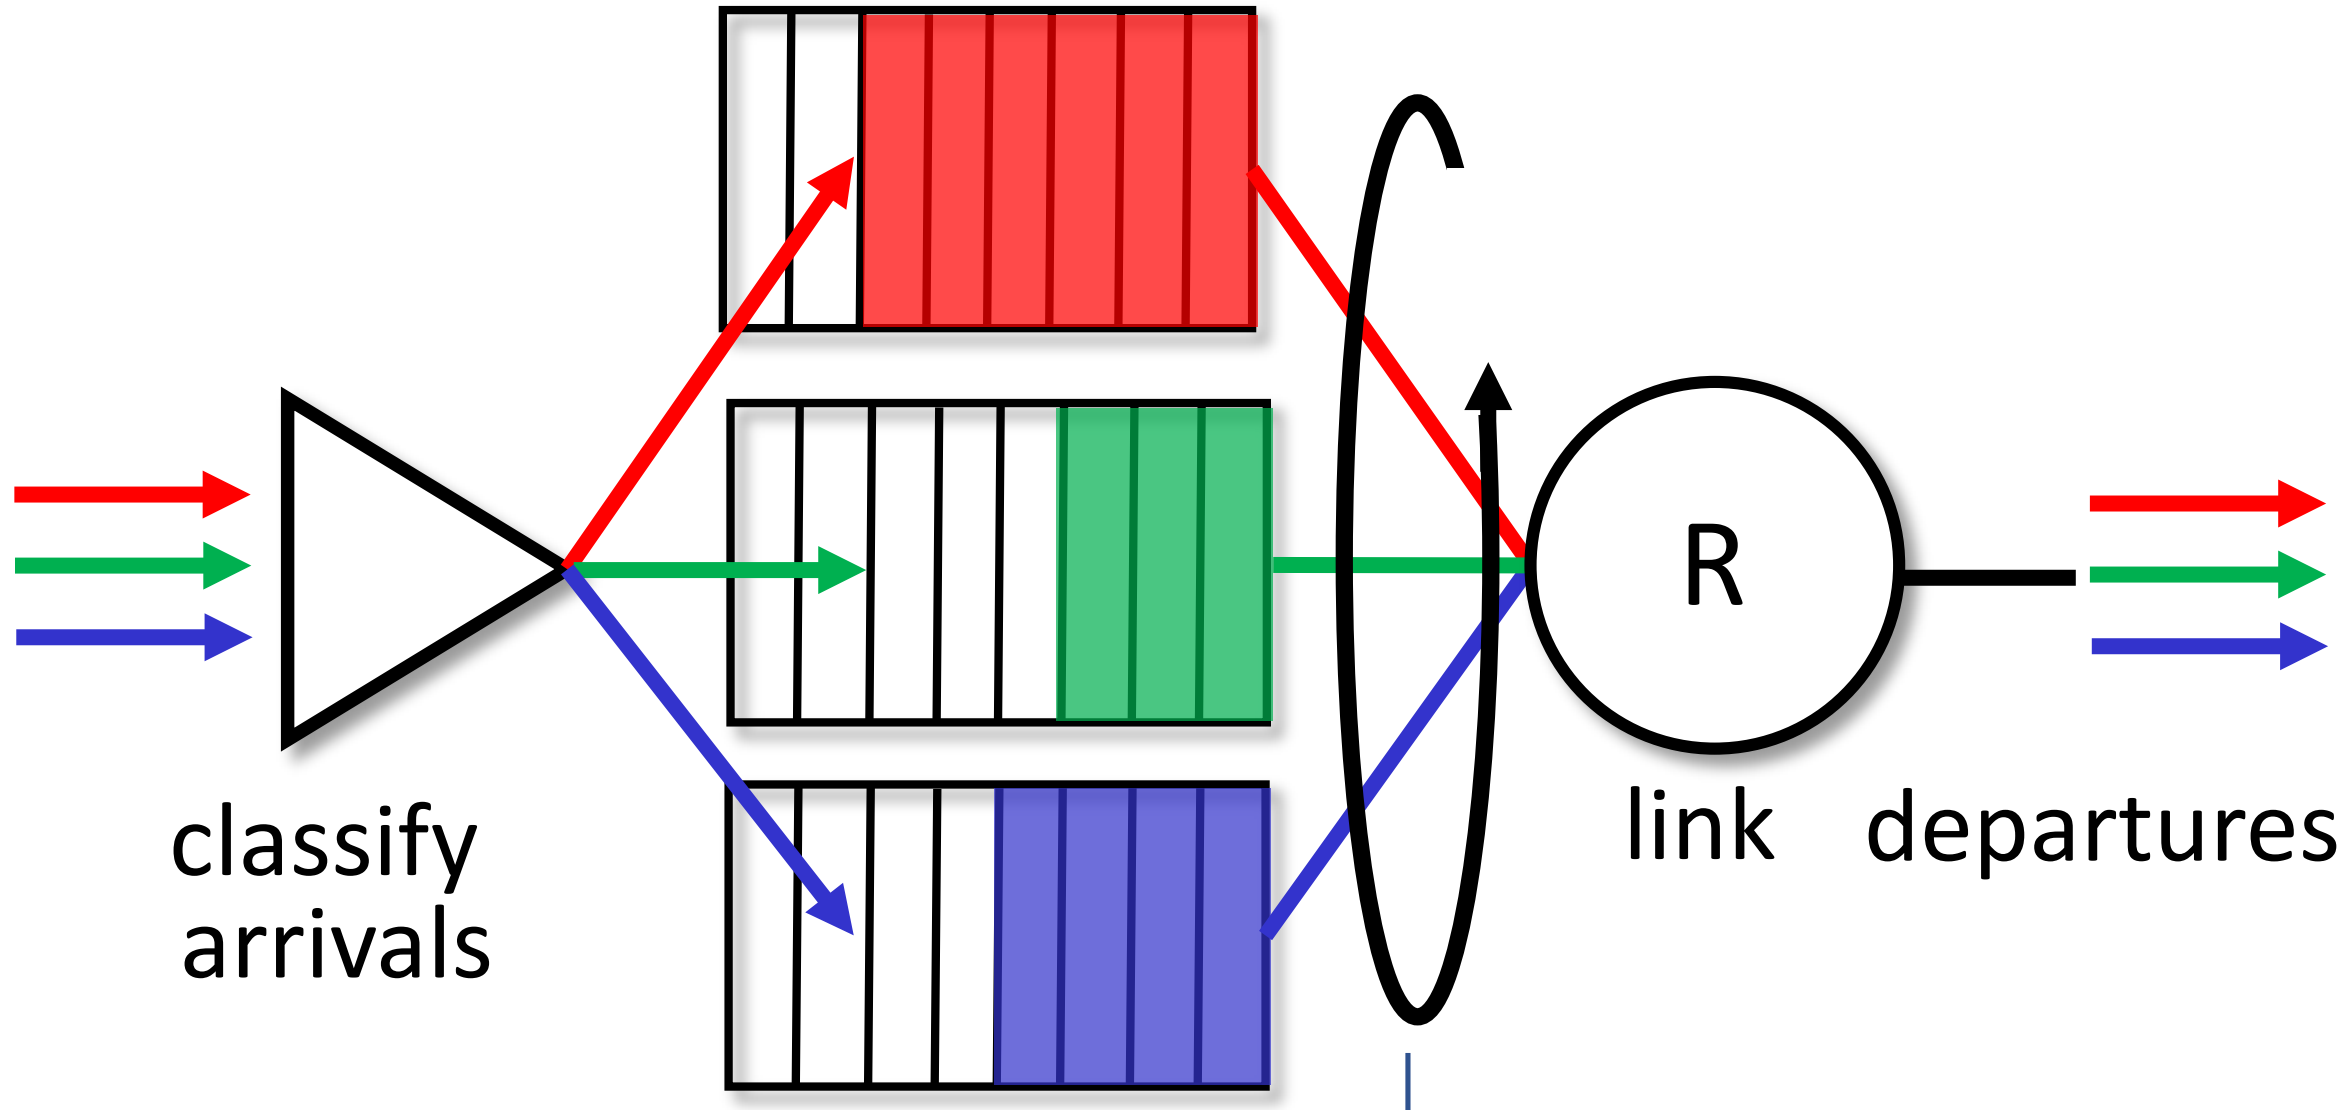

Scheduling policies: weighted fair queueing (WFQ)

- generalized Round Robin
- each class, *i*, has weight, w_i, and gets weighted amount of service in each cycle:

$$\frac{w_i}{\sum_j w_j}$$

- minimum bandwidth guarantee (per-traffic-class)

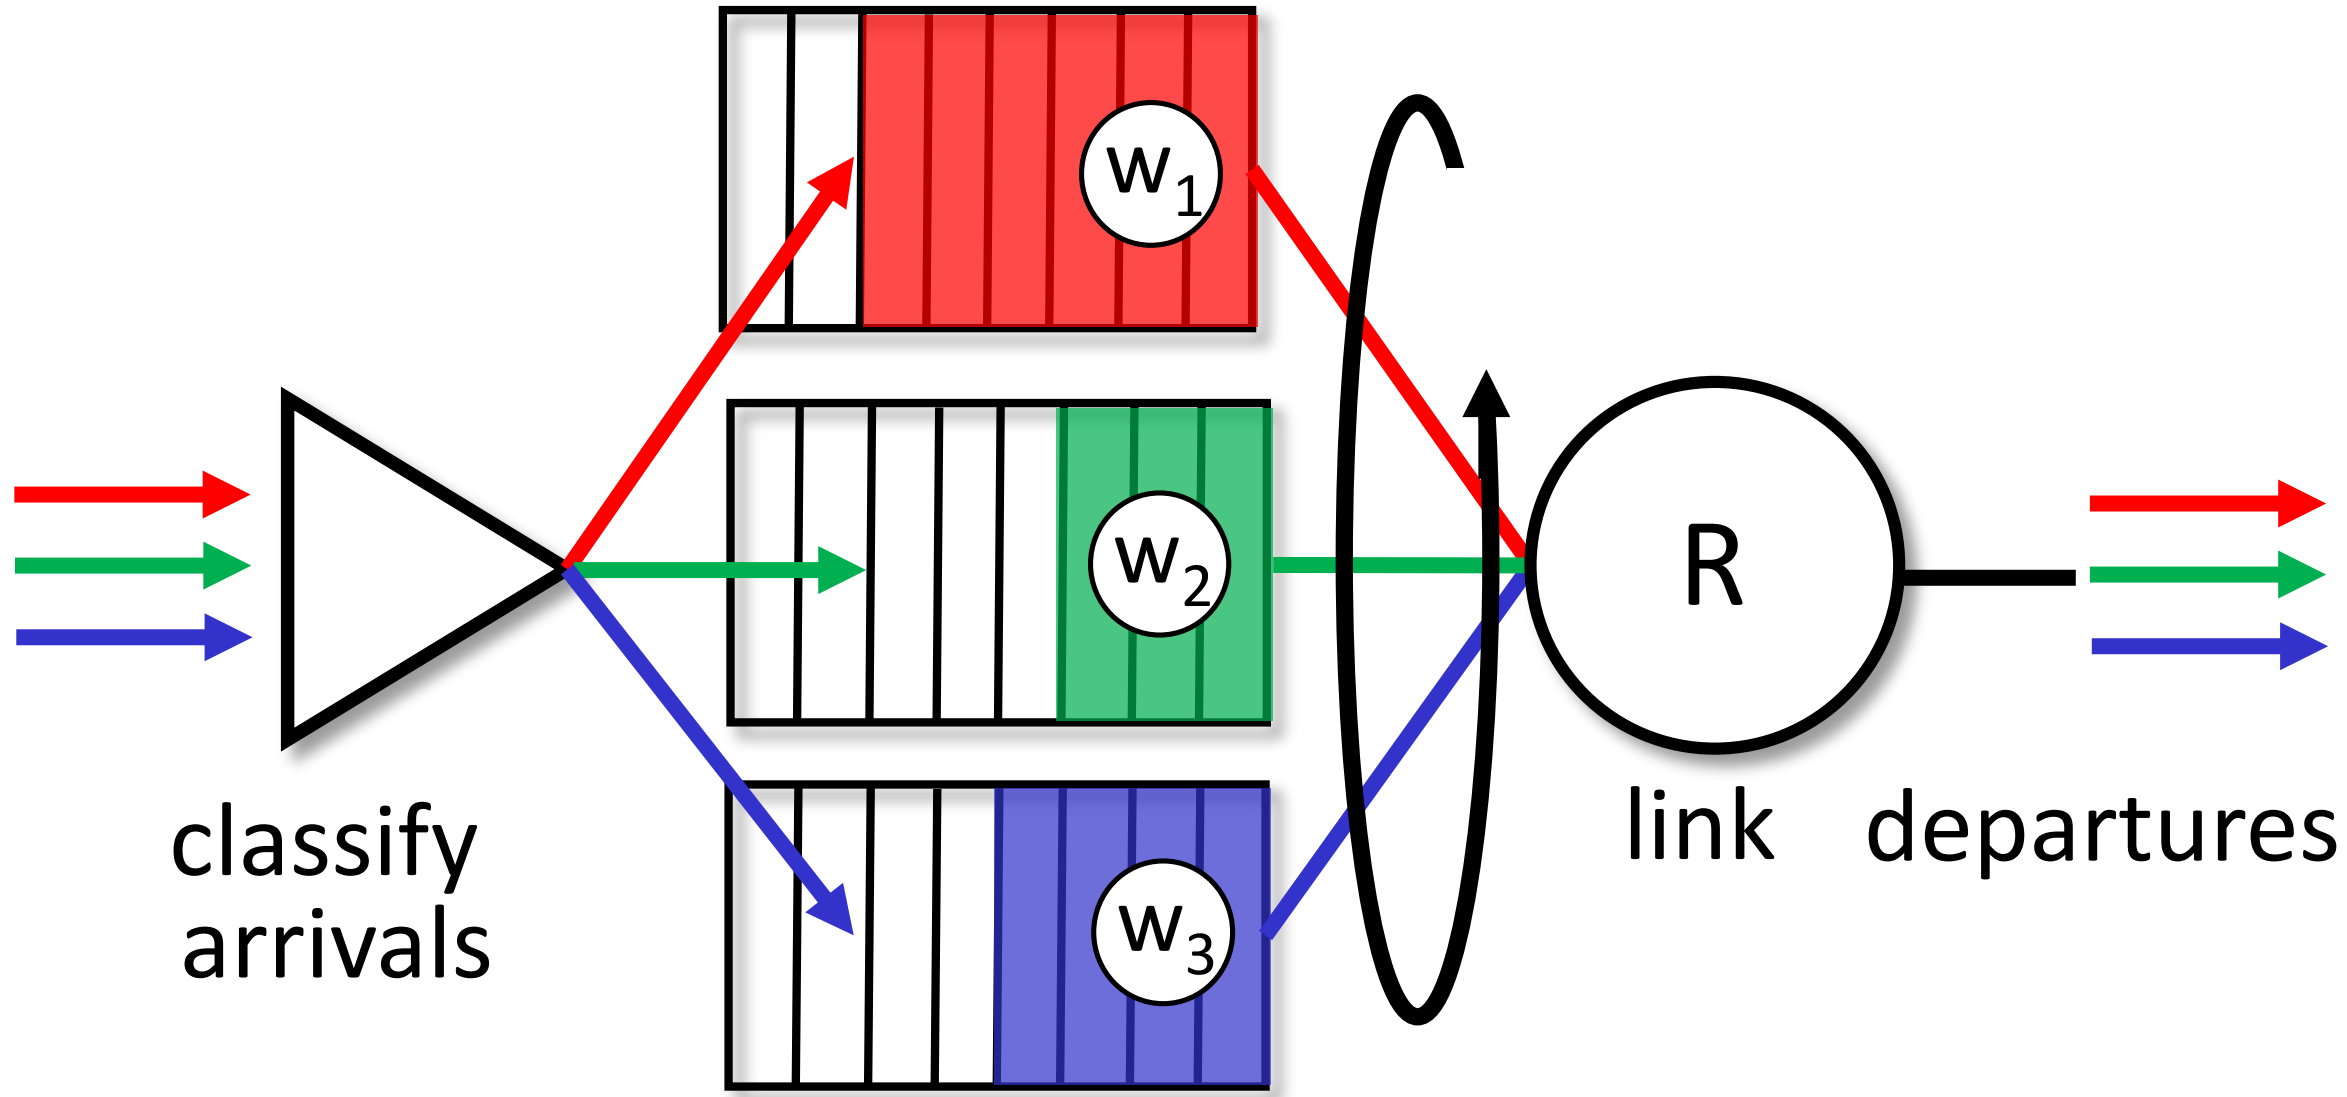

Network layer: "data plane" roadmap

- Network layer: overview
  - data plane
  - control plane
- What's inside a router
  - input ports, switching, output ports
  - buffer management, scheduling
- IP: the Internet Protocol
  - datagram format
  - addressing
  - network address translation
- Generalized Forwarding, SDN
  - match+action
  - OpenFlow: match+action in action

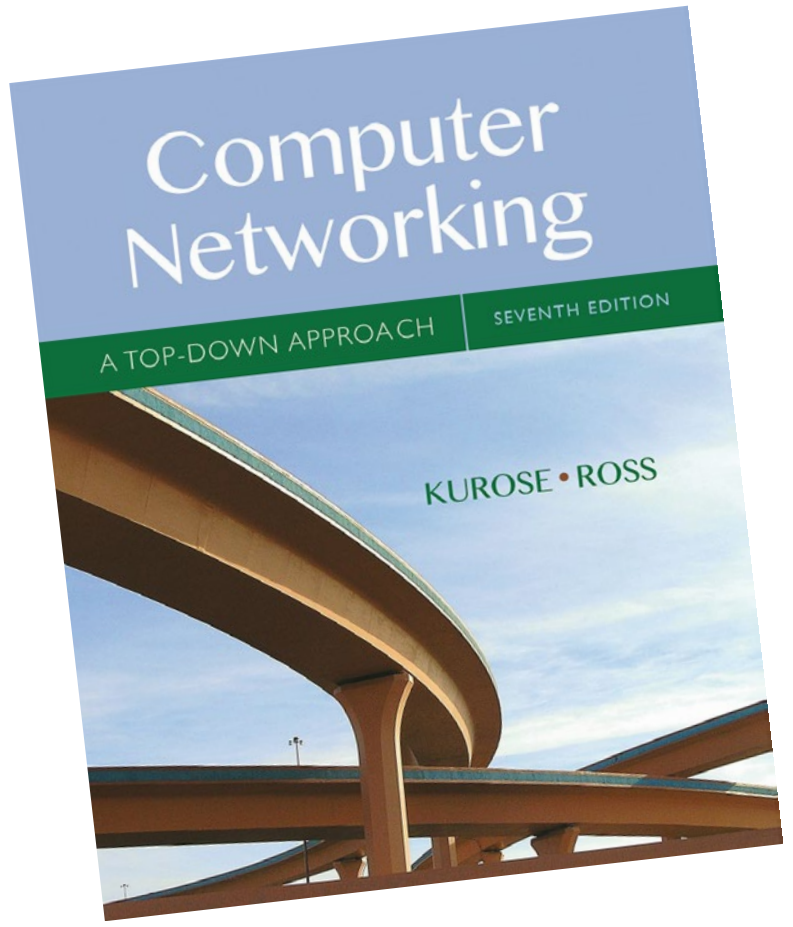

Chapter 4

IP Datagram format

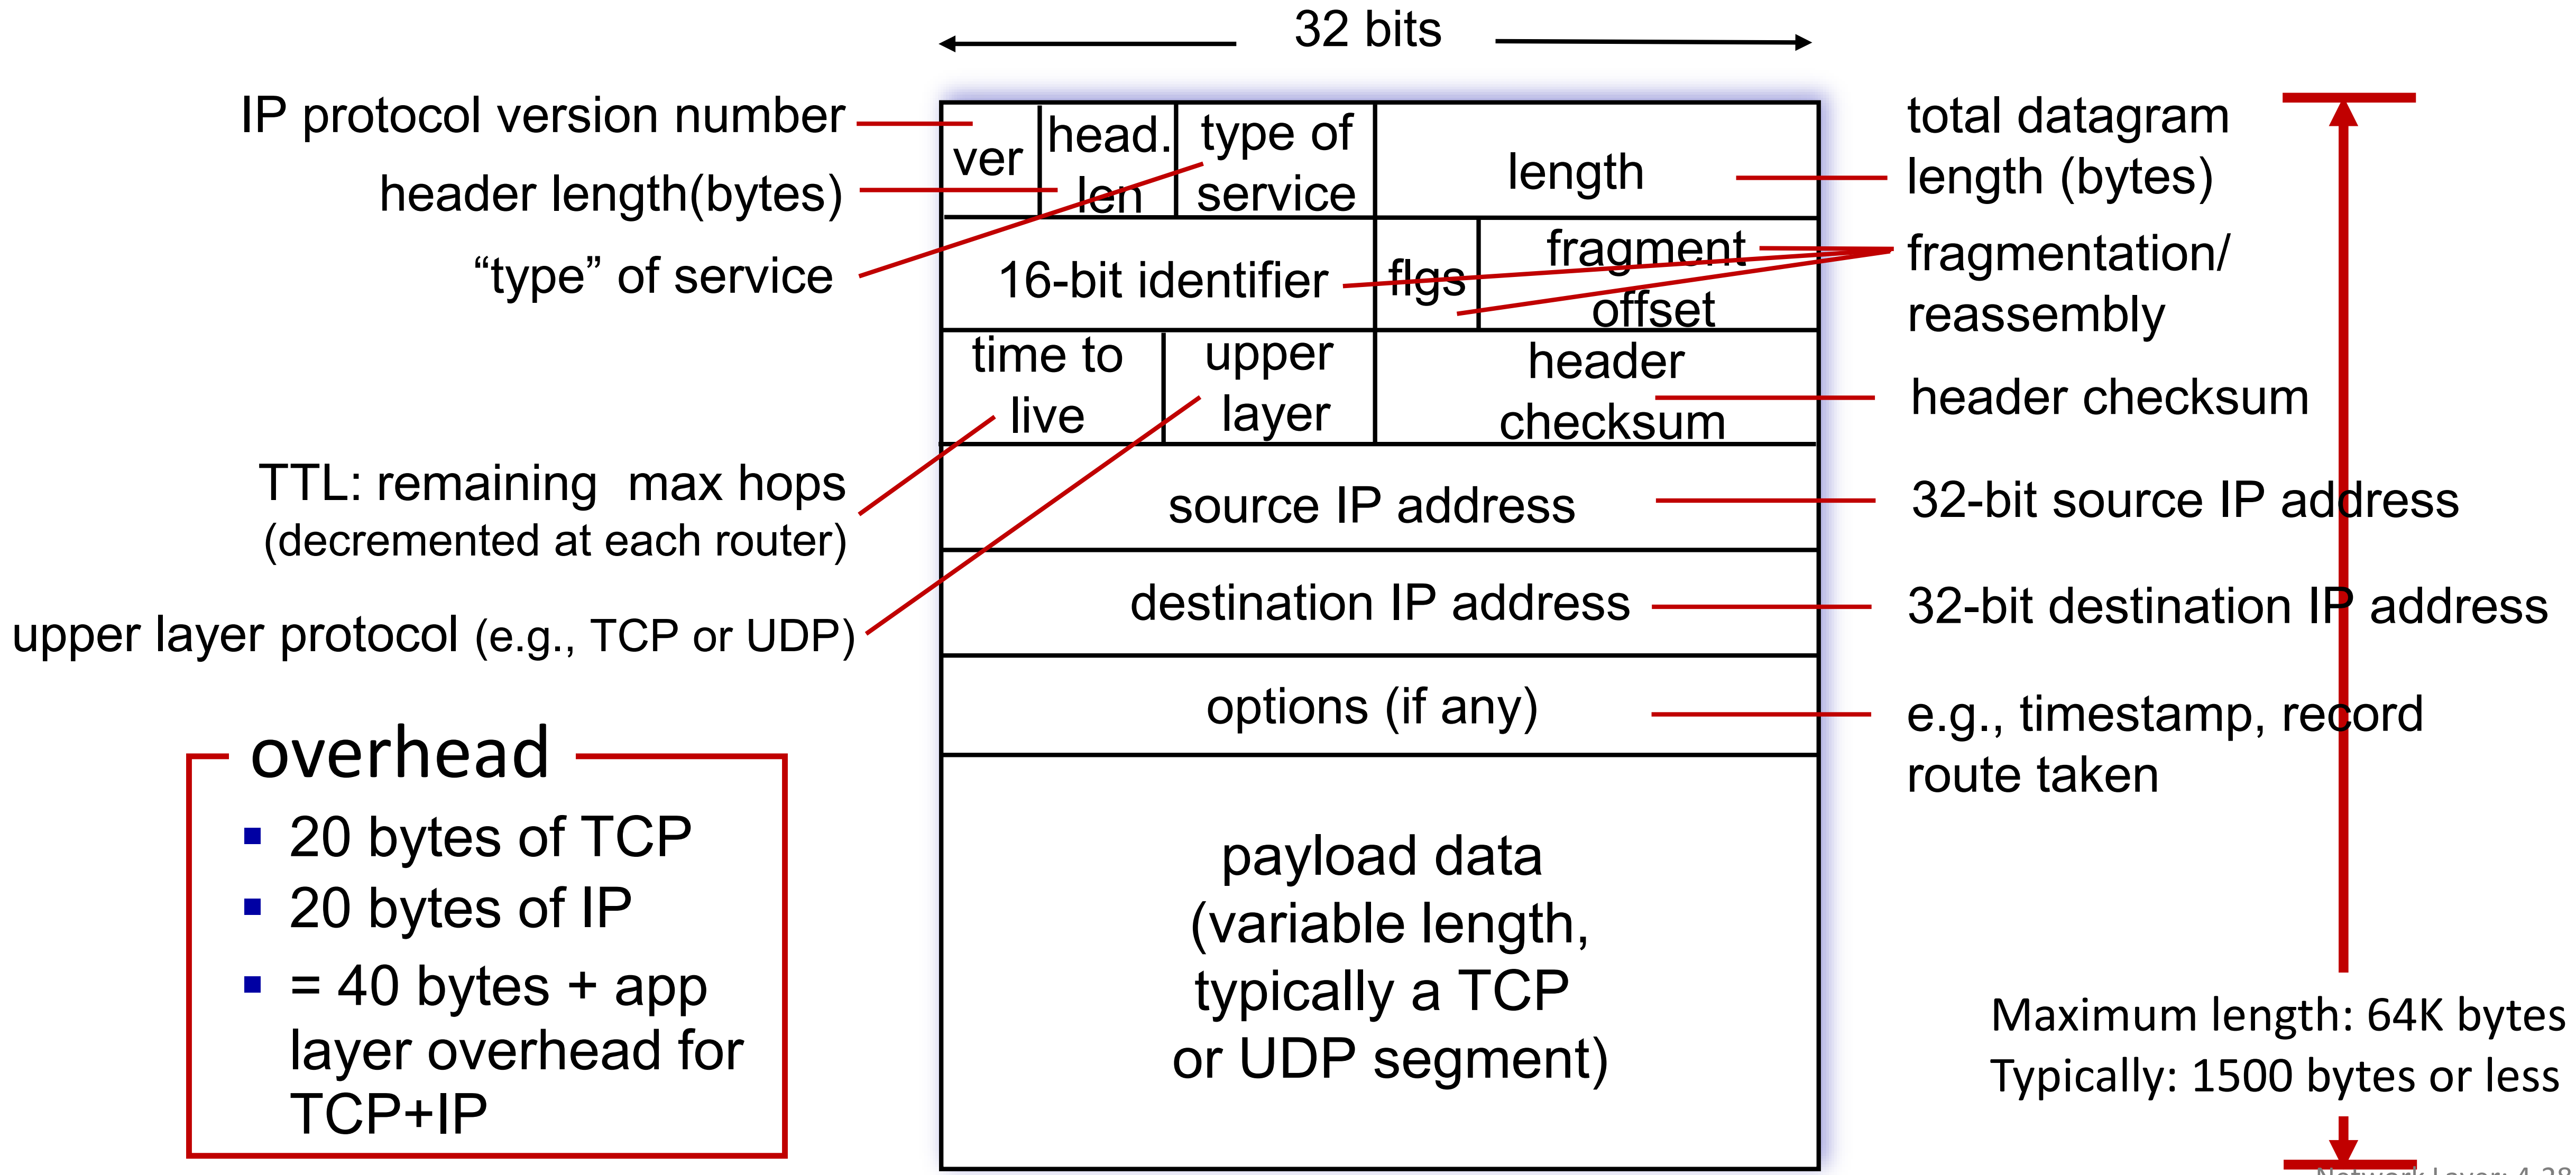

overhead

- 20 bytes of TCP
- 20 bytes of IP
- = 40 bytes + app layer overhead for TCP+IP

IP addressing: introduction

- IP address: 32-bit identifier associated with each host/router interface
- interface: connection between host/router and physical link
  - router's typically have multiple interfaces
  - host typically has one or two interfaces (e.g., wired Ethernet, wireless 802.11)

223=2^0+2^1+2^2+2^3+2^4+2^6+2^7

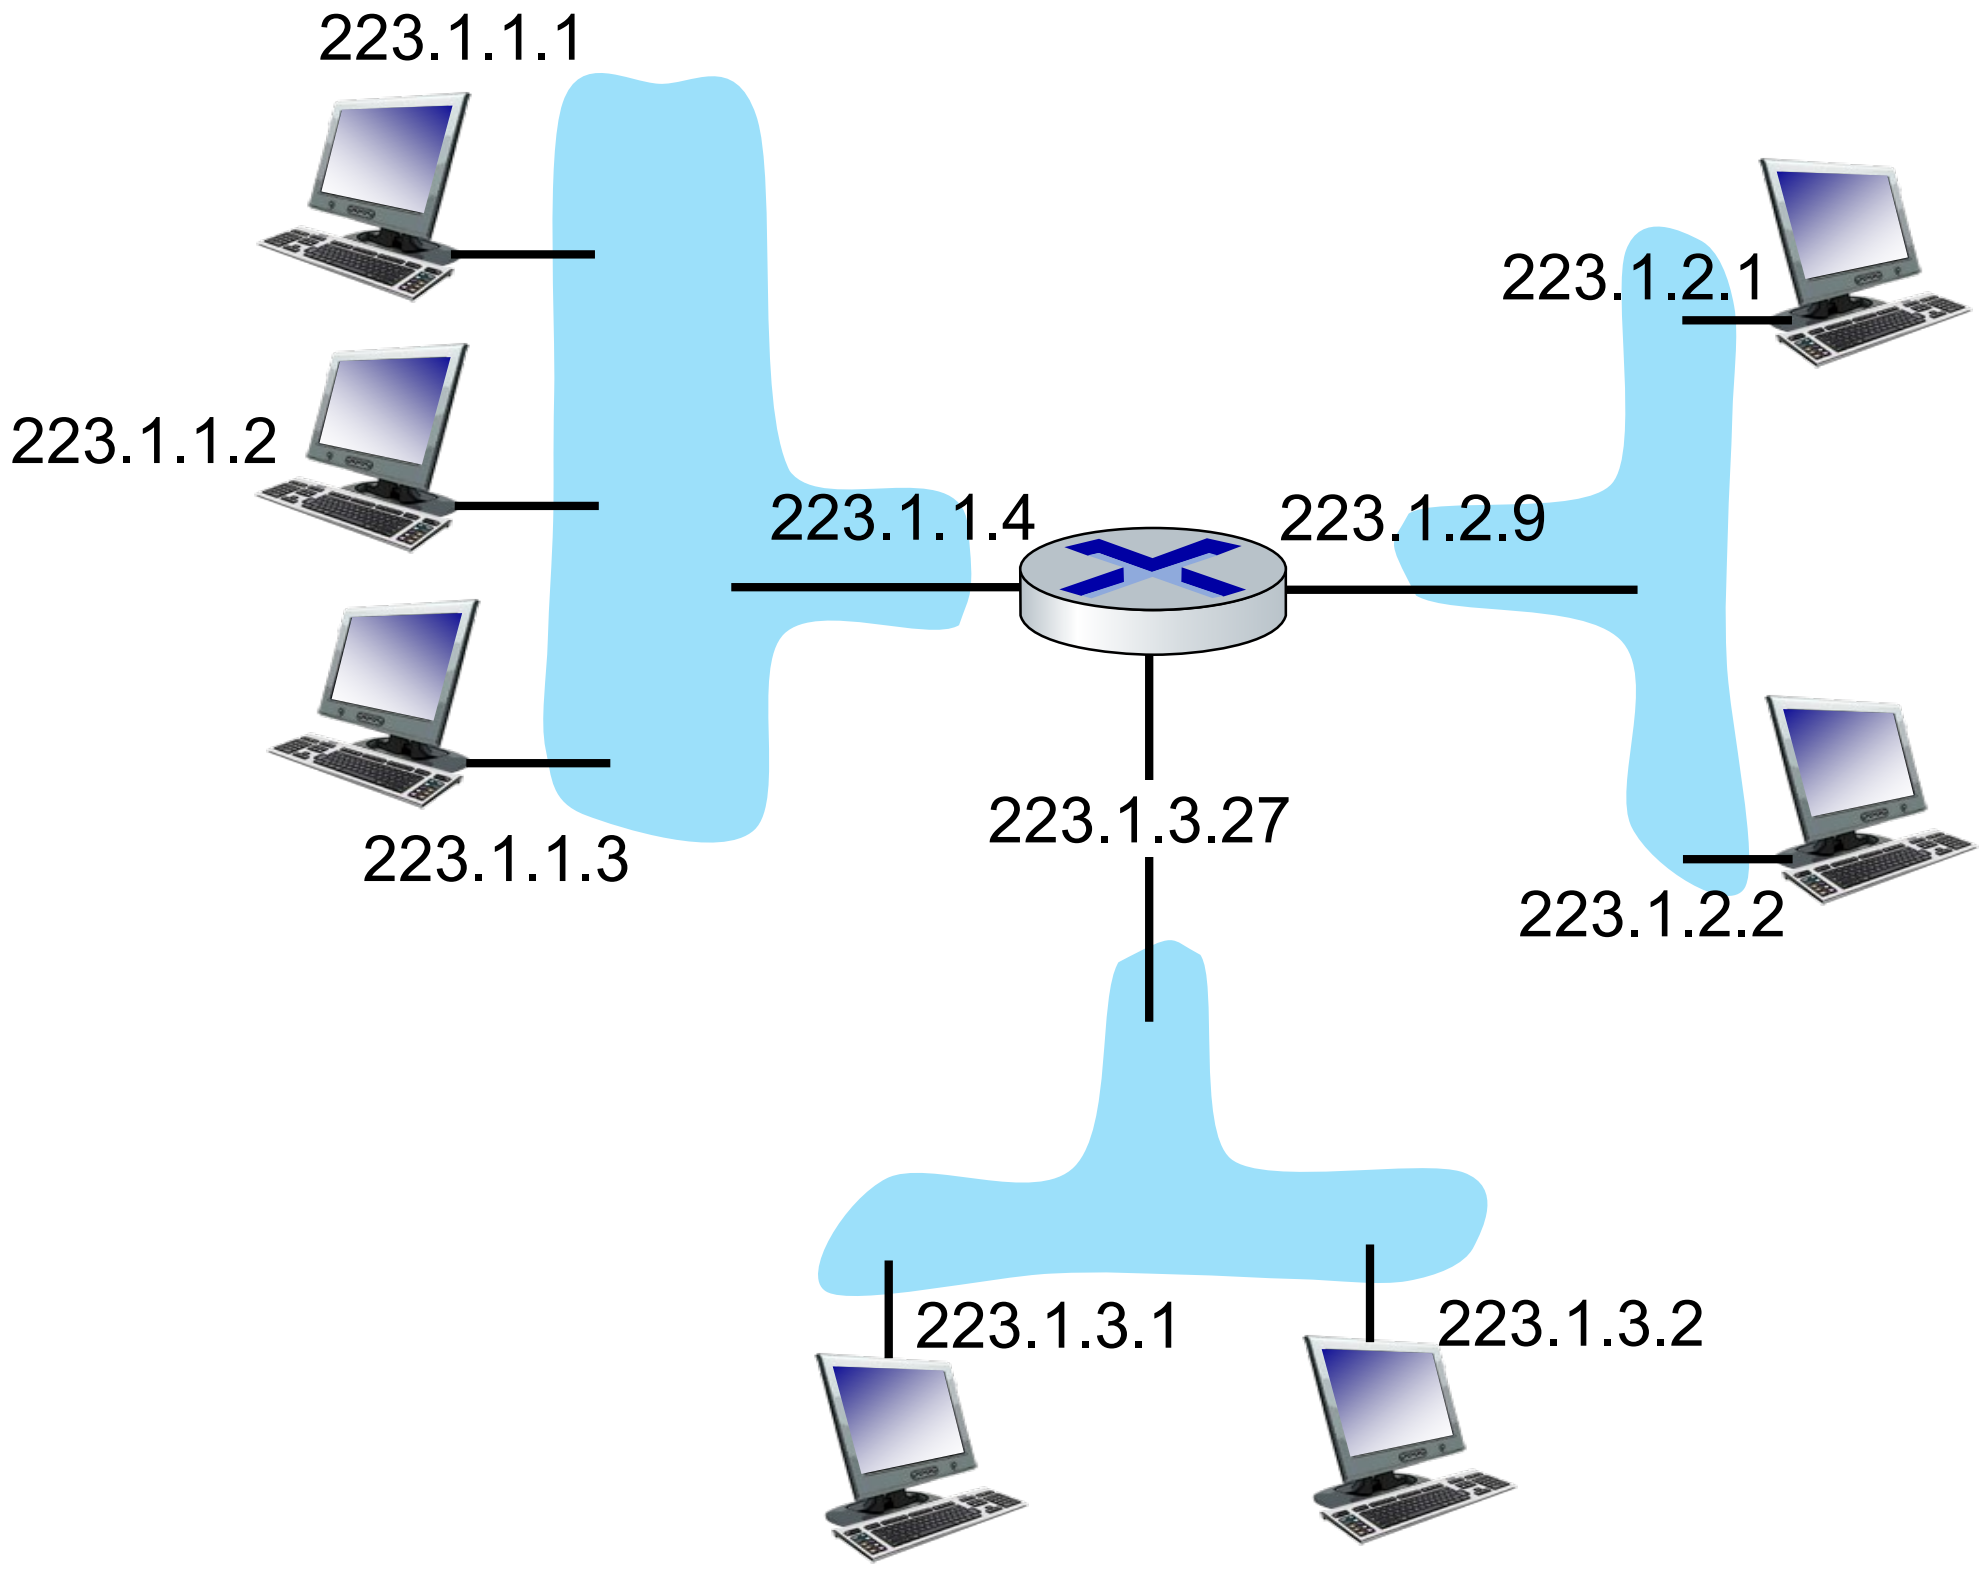

dotted-decimal IP address notation:

$$223.1.1.1 = \underbrace{11011111}_{223}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}$$

IP addressing: introduction

- IP address: 32-bit identifier associated with each host or router *interface*
- interface: connection between host/router and physical link
  - router's typically have multiple interfaces
  - host typically has one or two interfaces (e.g., wired Ethernet, wireless 802.11)

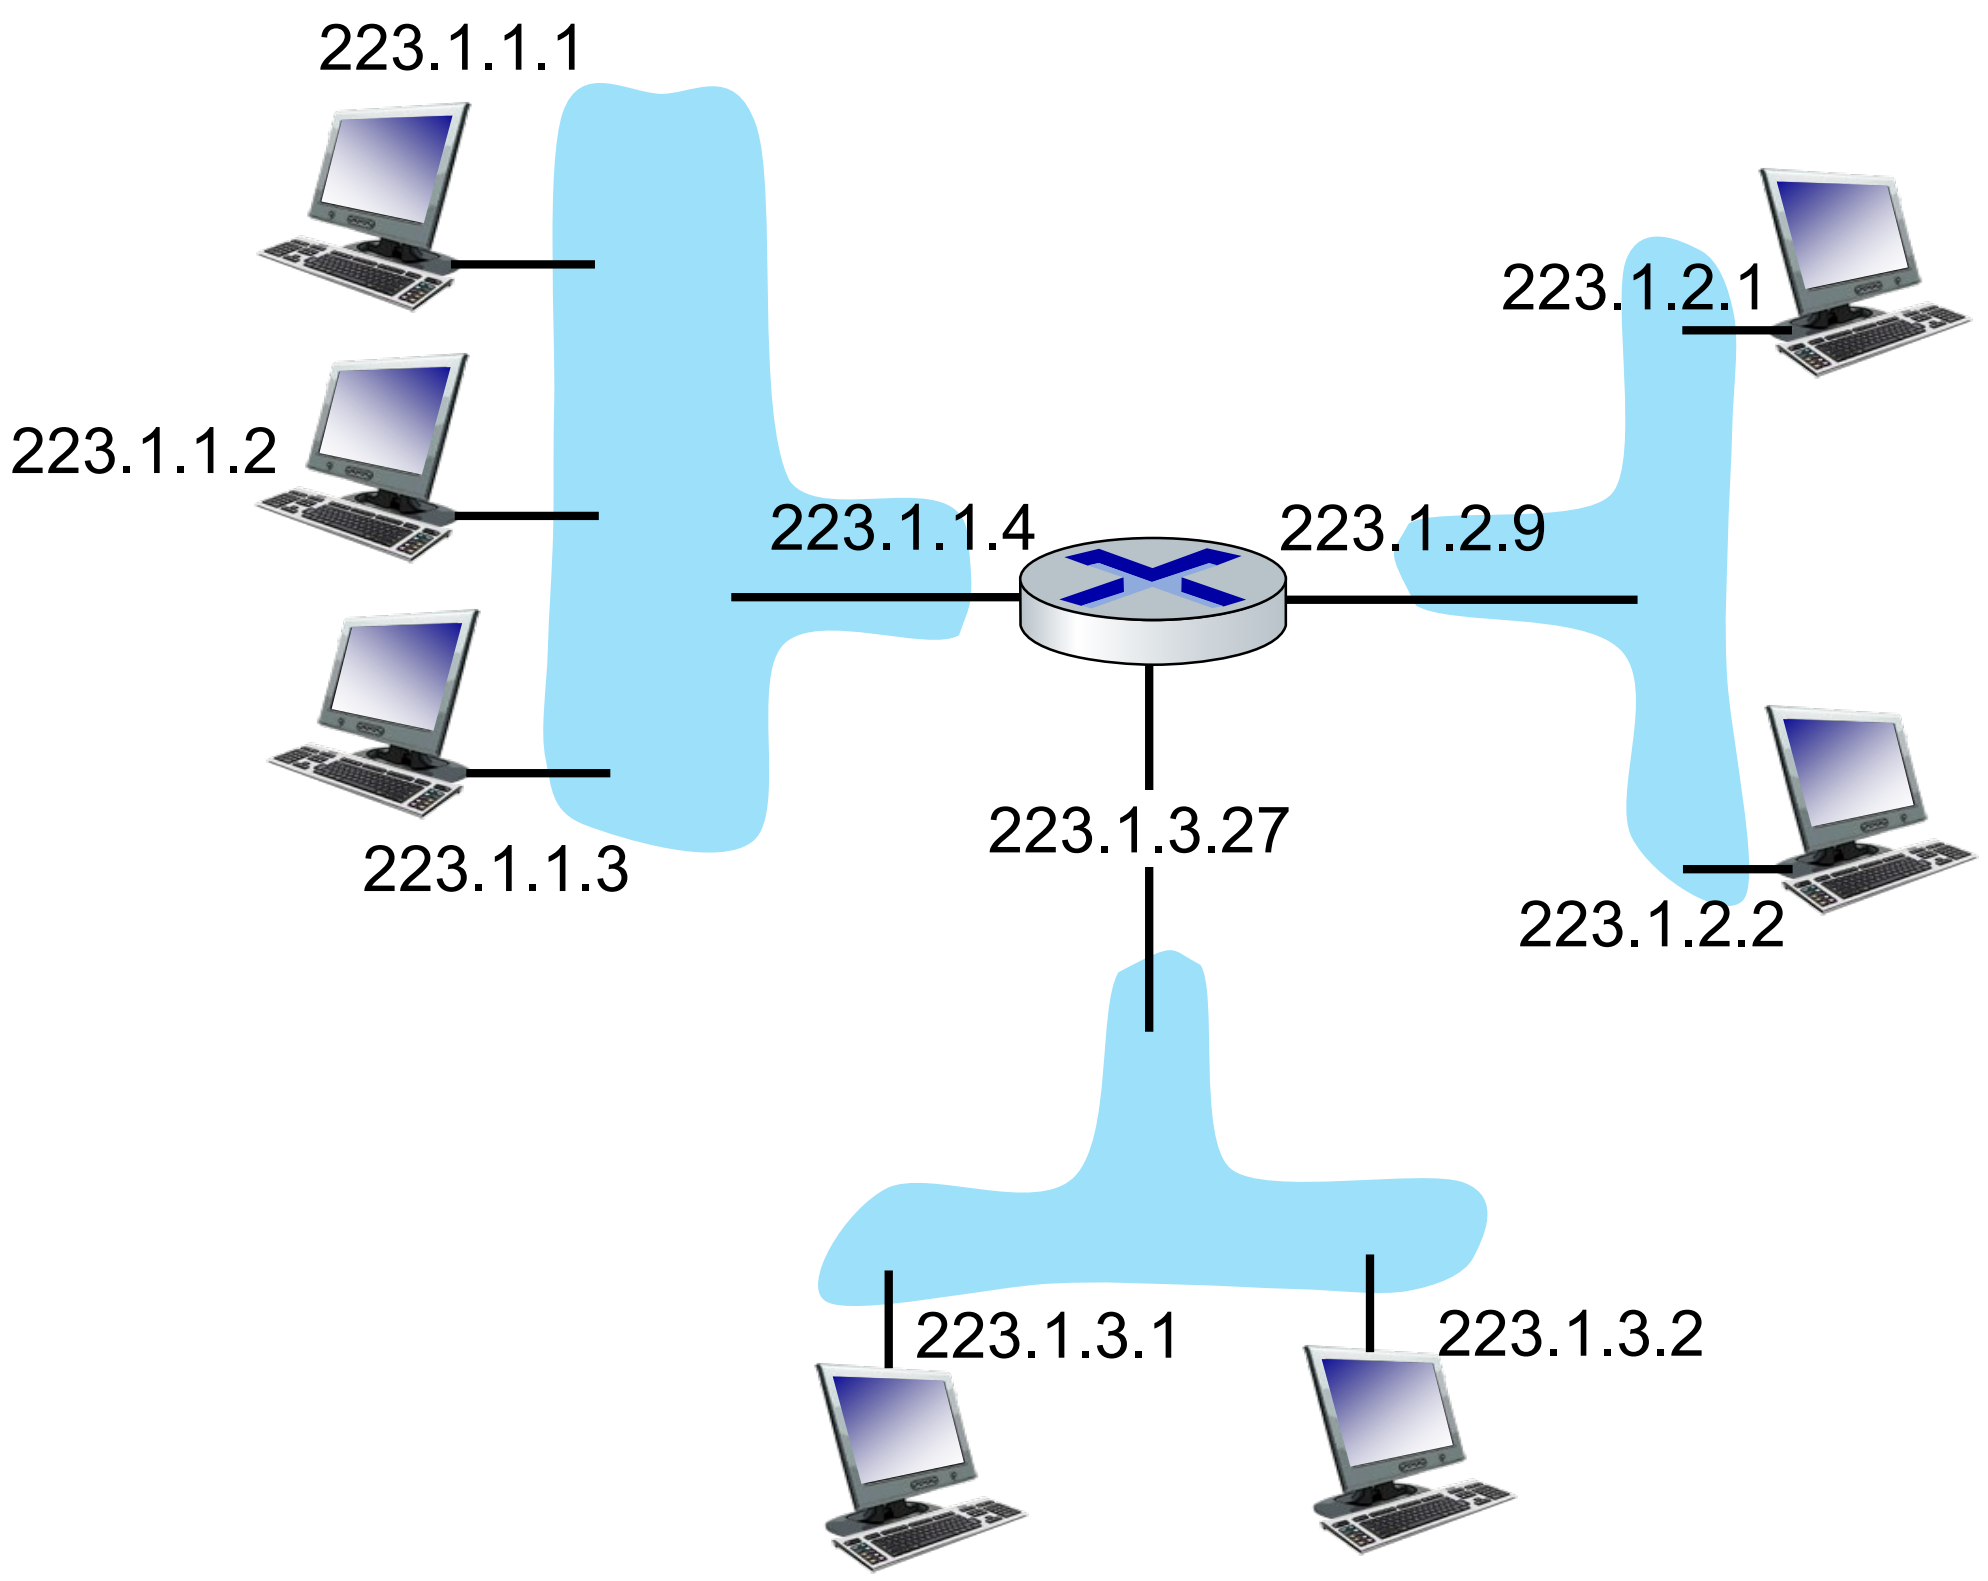

dotted-decimal IP address notation:

223.1.1.1 = 11011111 00000001 00000001 00000001

$\underbrace{11011111}_{223}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}$

IP addressing: introduction

A: wired Ethernet interfaces connected by Ethernet switches

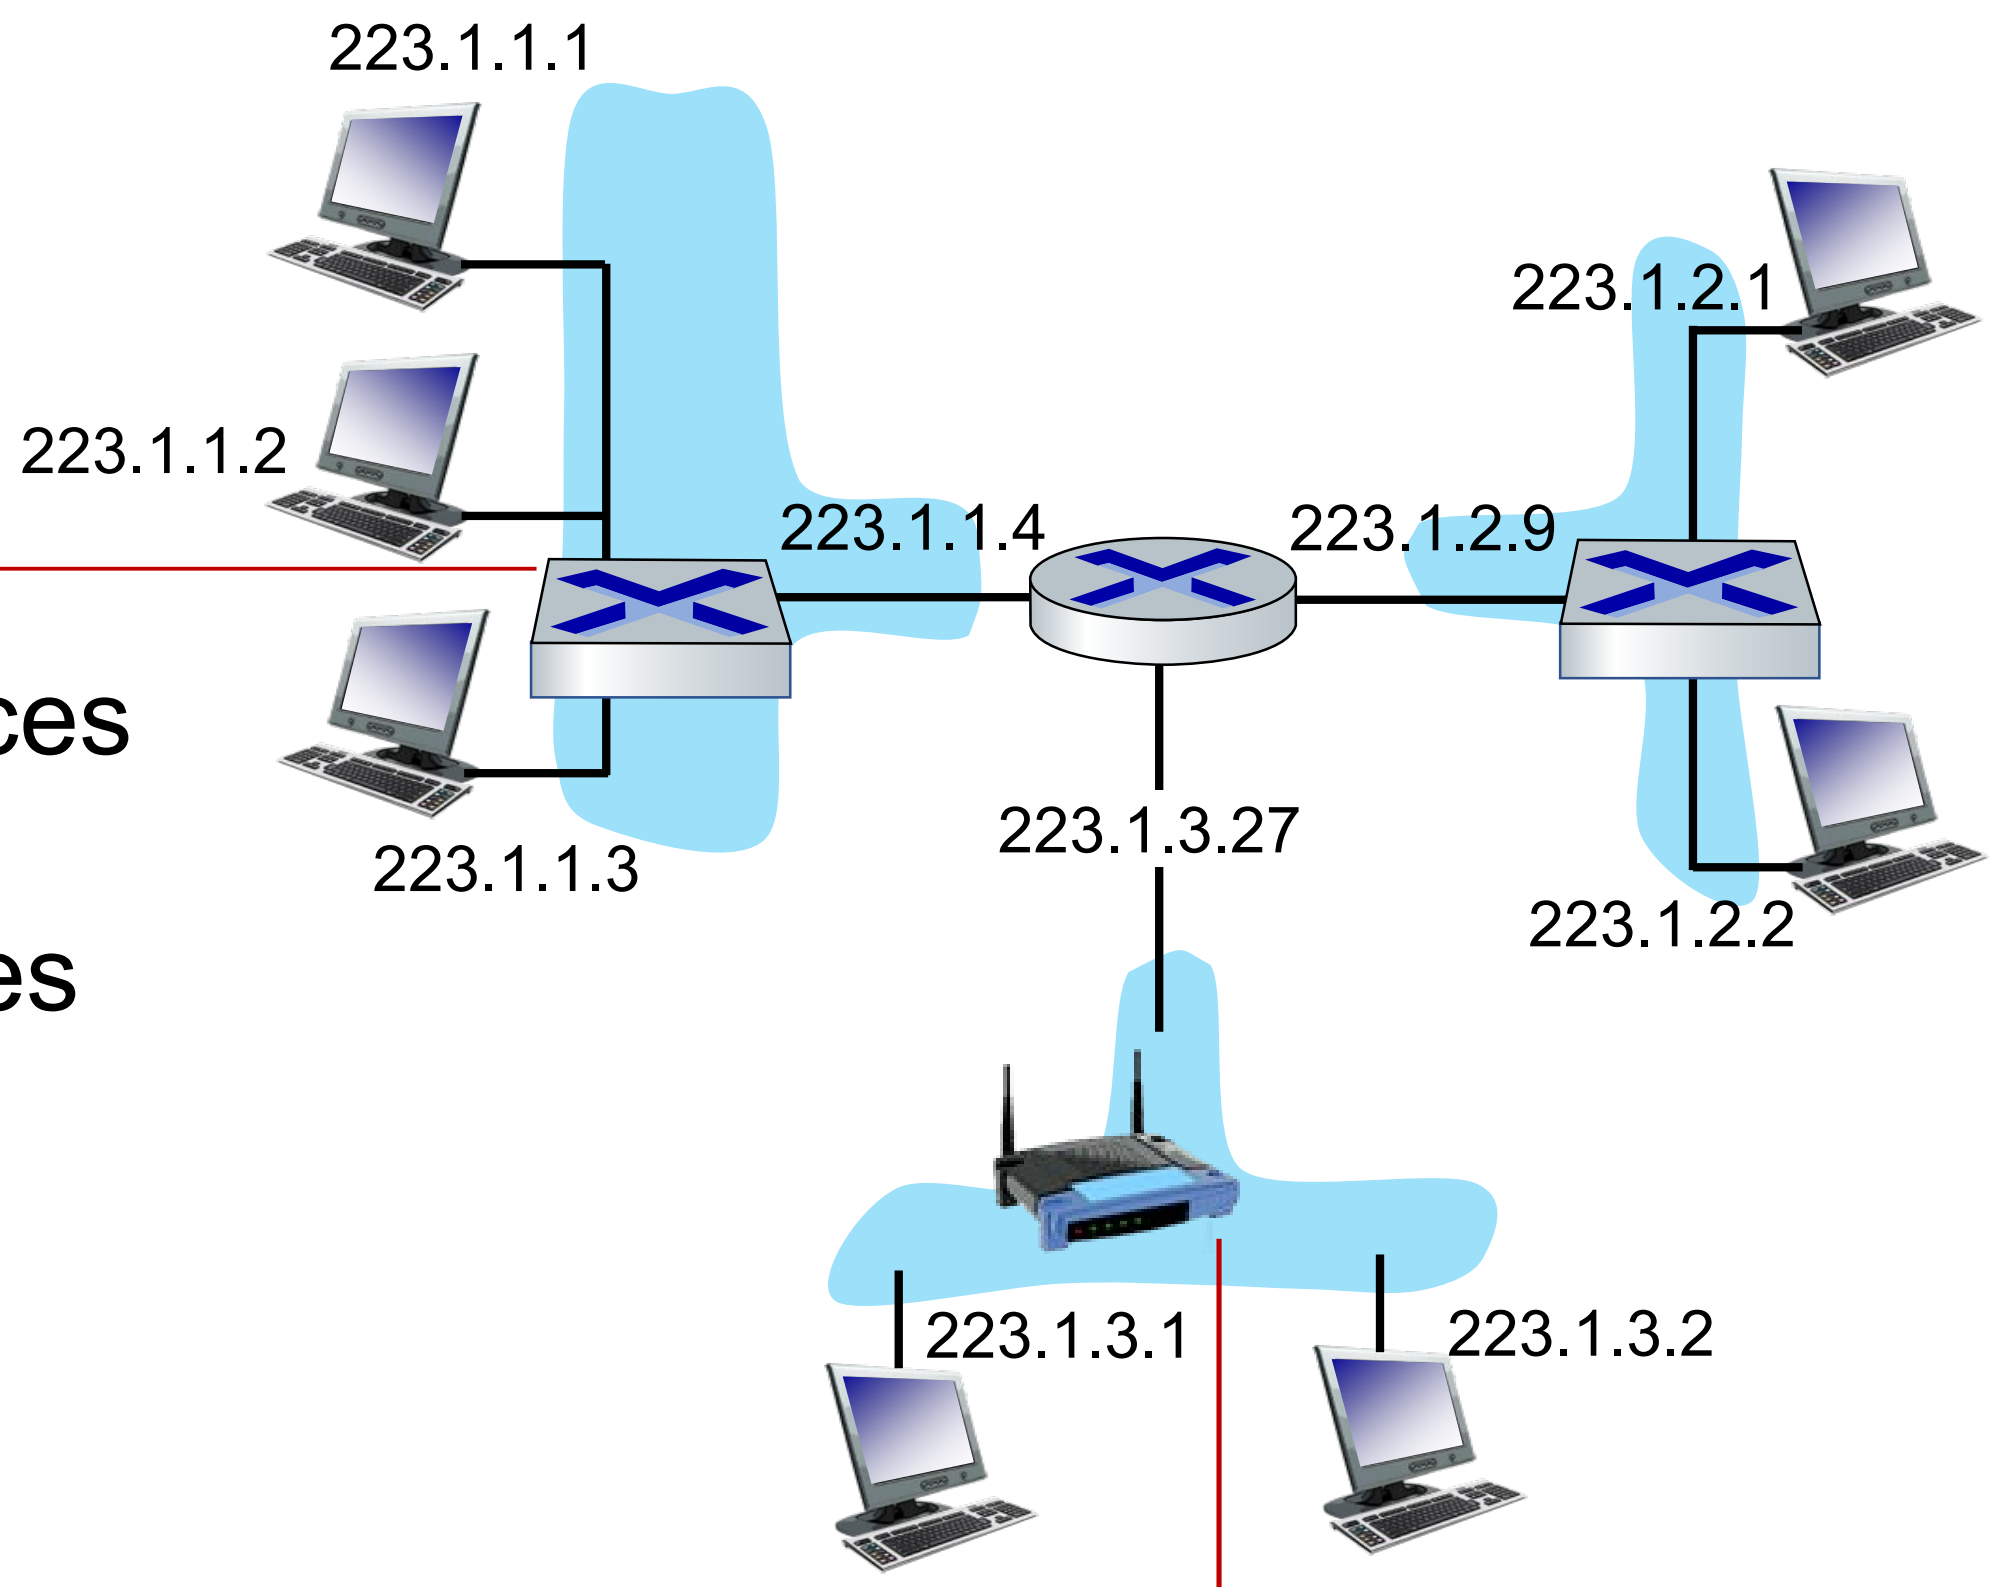

A: wireless WiFi interfaces connected by WiFi base station

Subnets

- *What's a subnet ?*
  - device interfaces that can physically reach each other without passing through an intervening router
- IP addresses have structure:
  - subnet part: devices in same subnet have common high order bits
  - host part: remaining low order bits

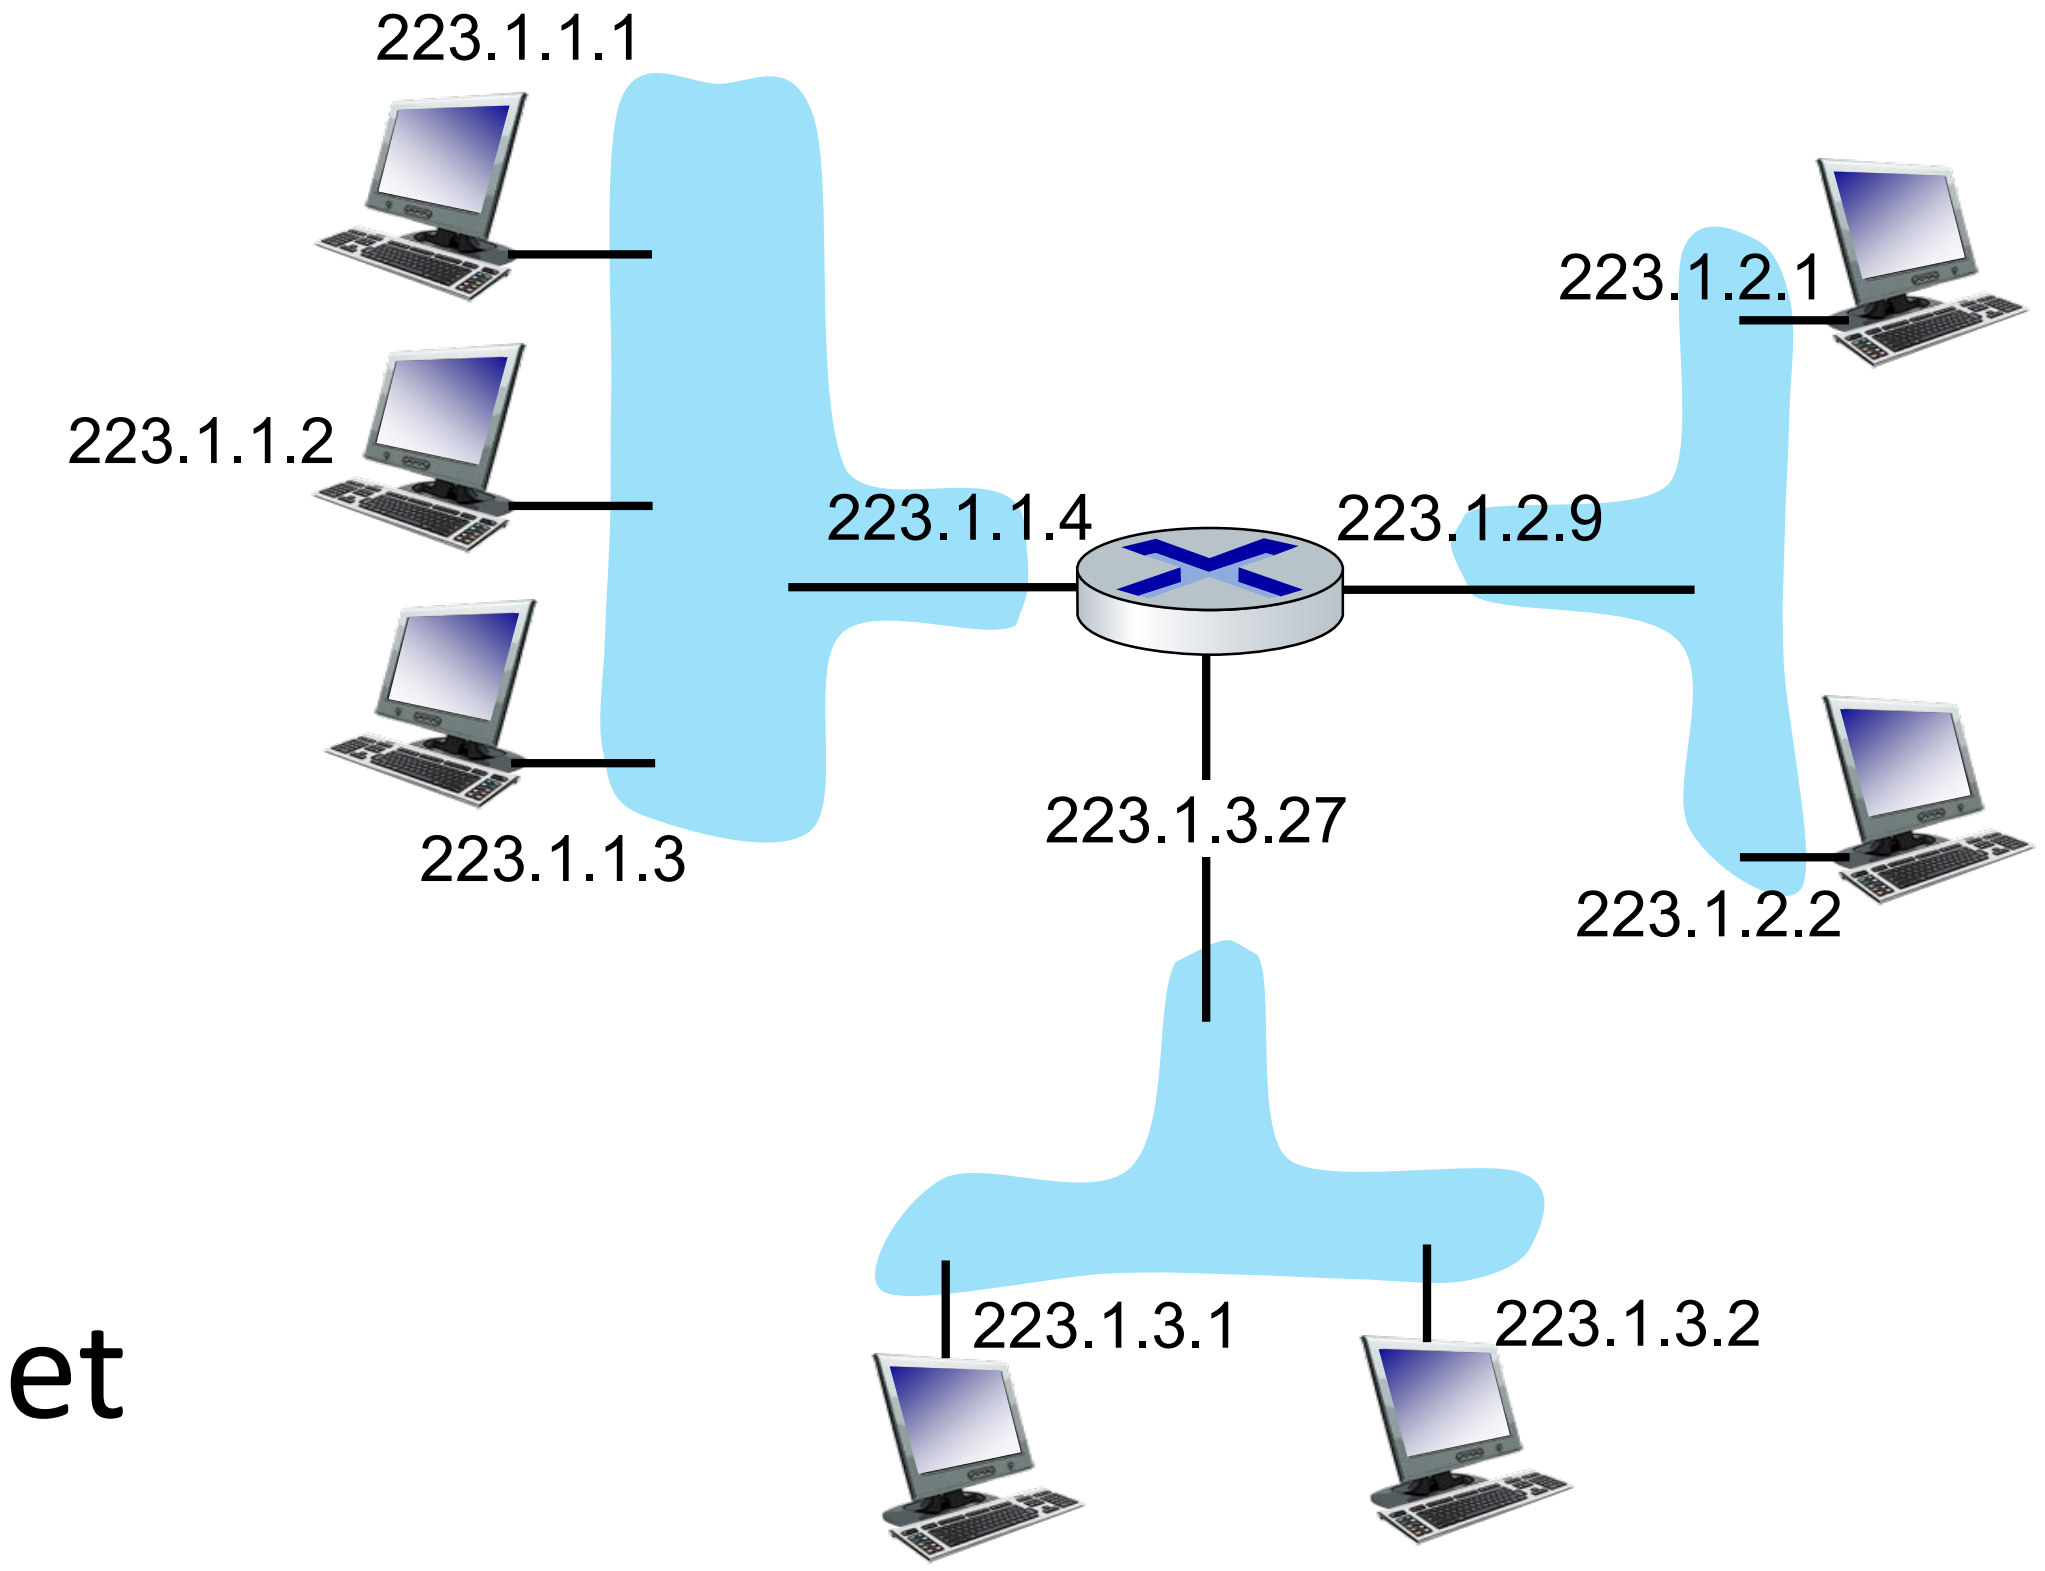

network consisting of 3 subnets

Subnets

Recipe for defining subnets:

- detach each interface from its host or router, creating "islands" of isolated networks
- each isolated network is called a *subnet*
- Subnet mask/24:

255	255	255	0
11111111	111111111	11111111	00000000

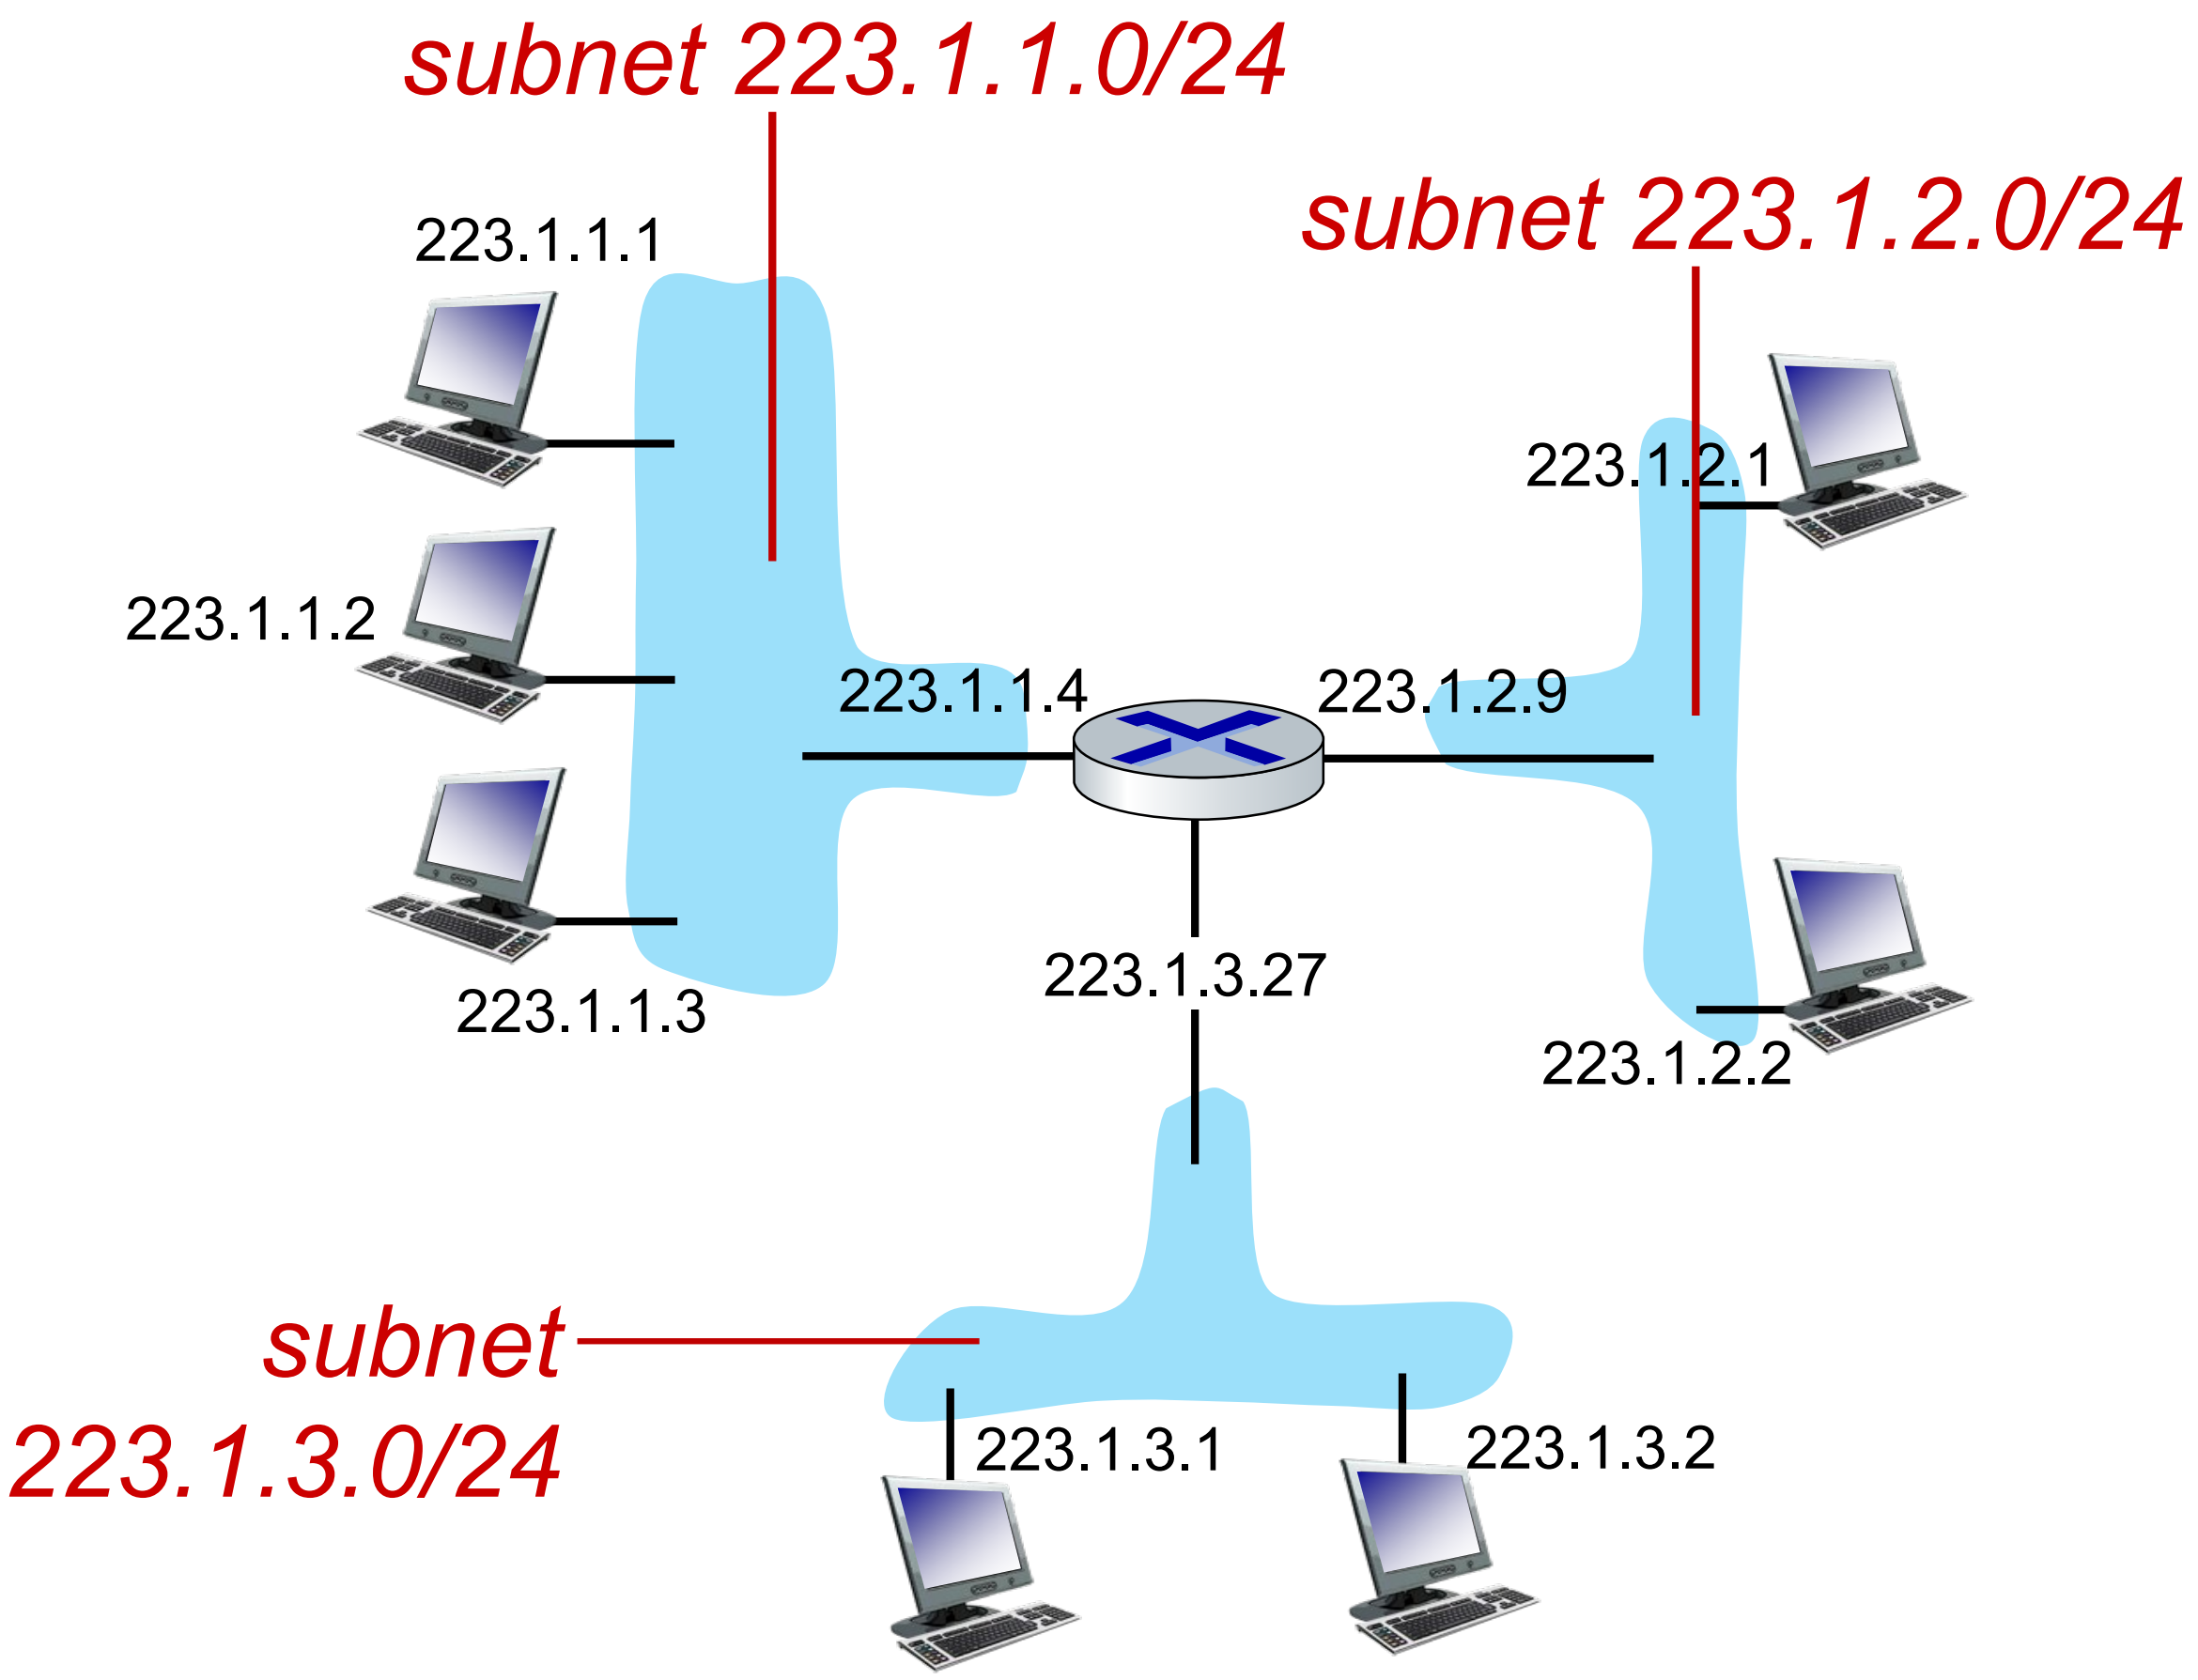

subnet mask: /24
(high-order 24 bits: subnet part of IP address)

Subnets

- where are the subnets?
- what are the /24 subnet addresses?

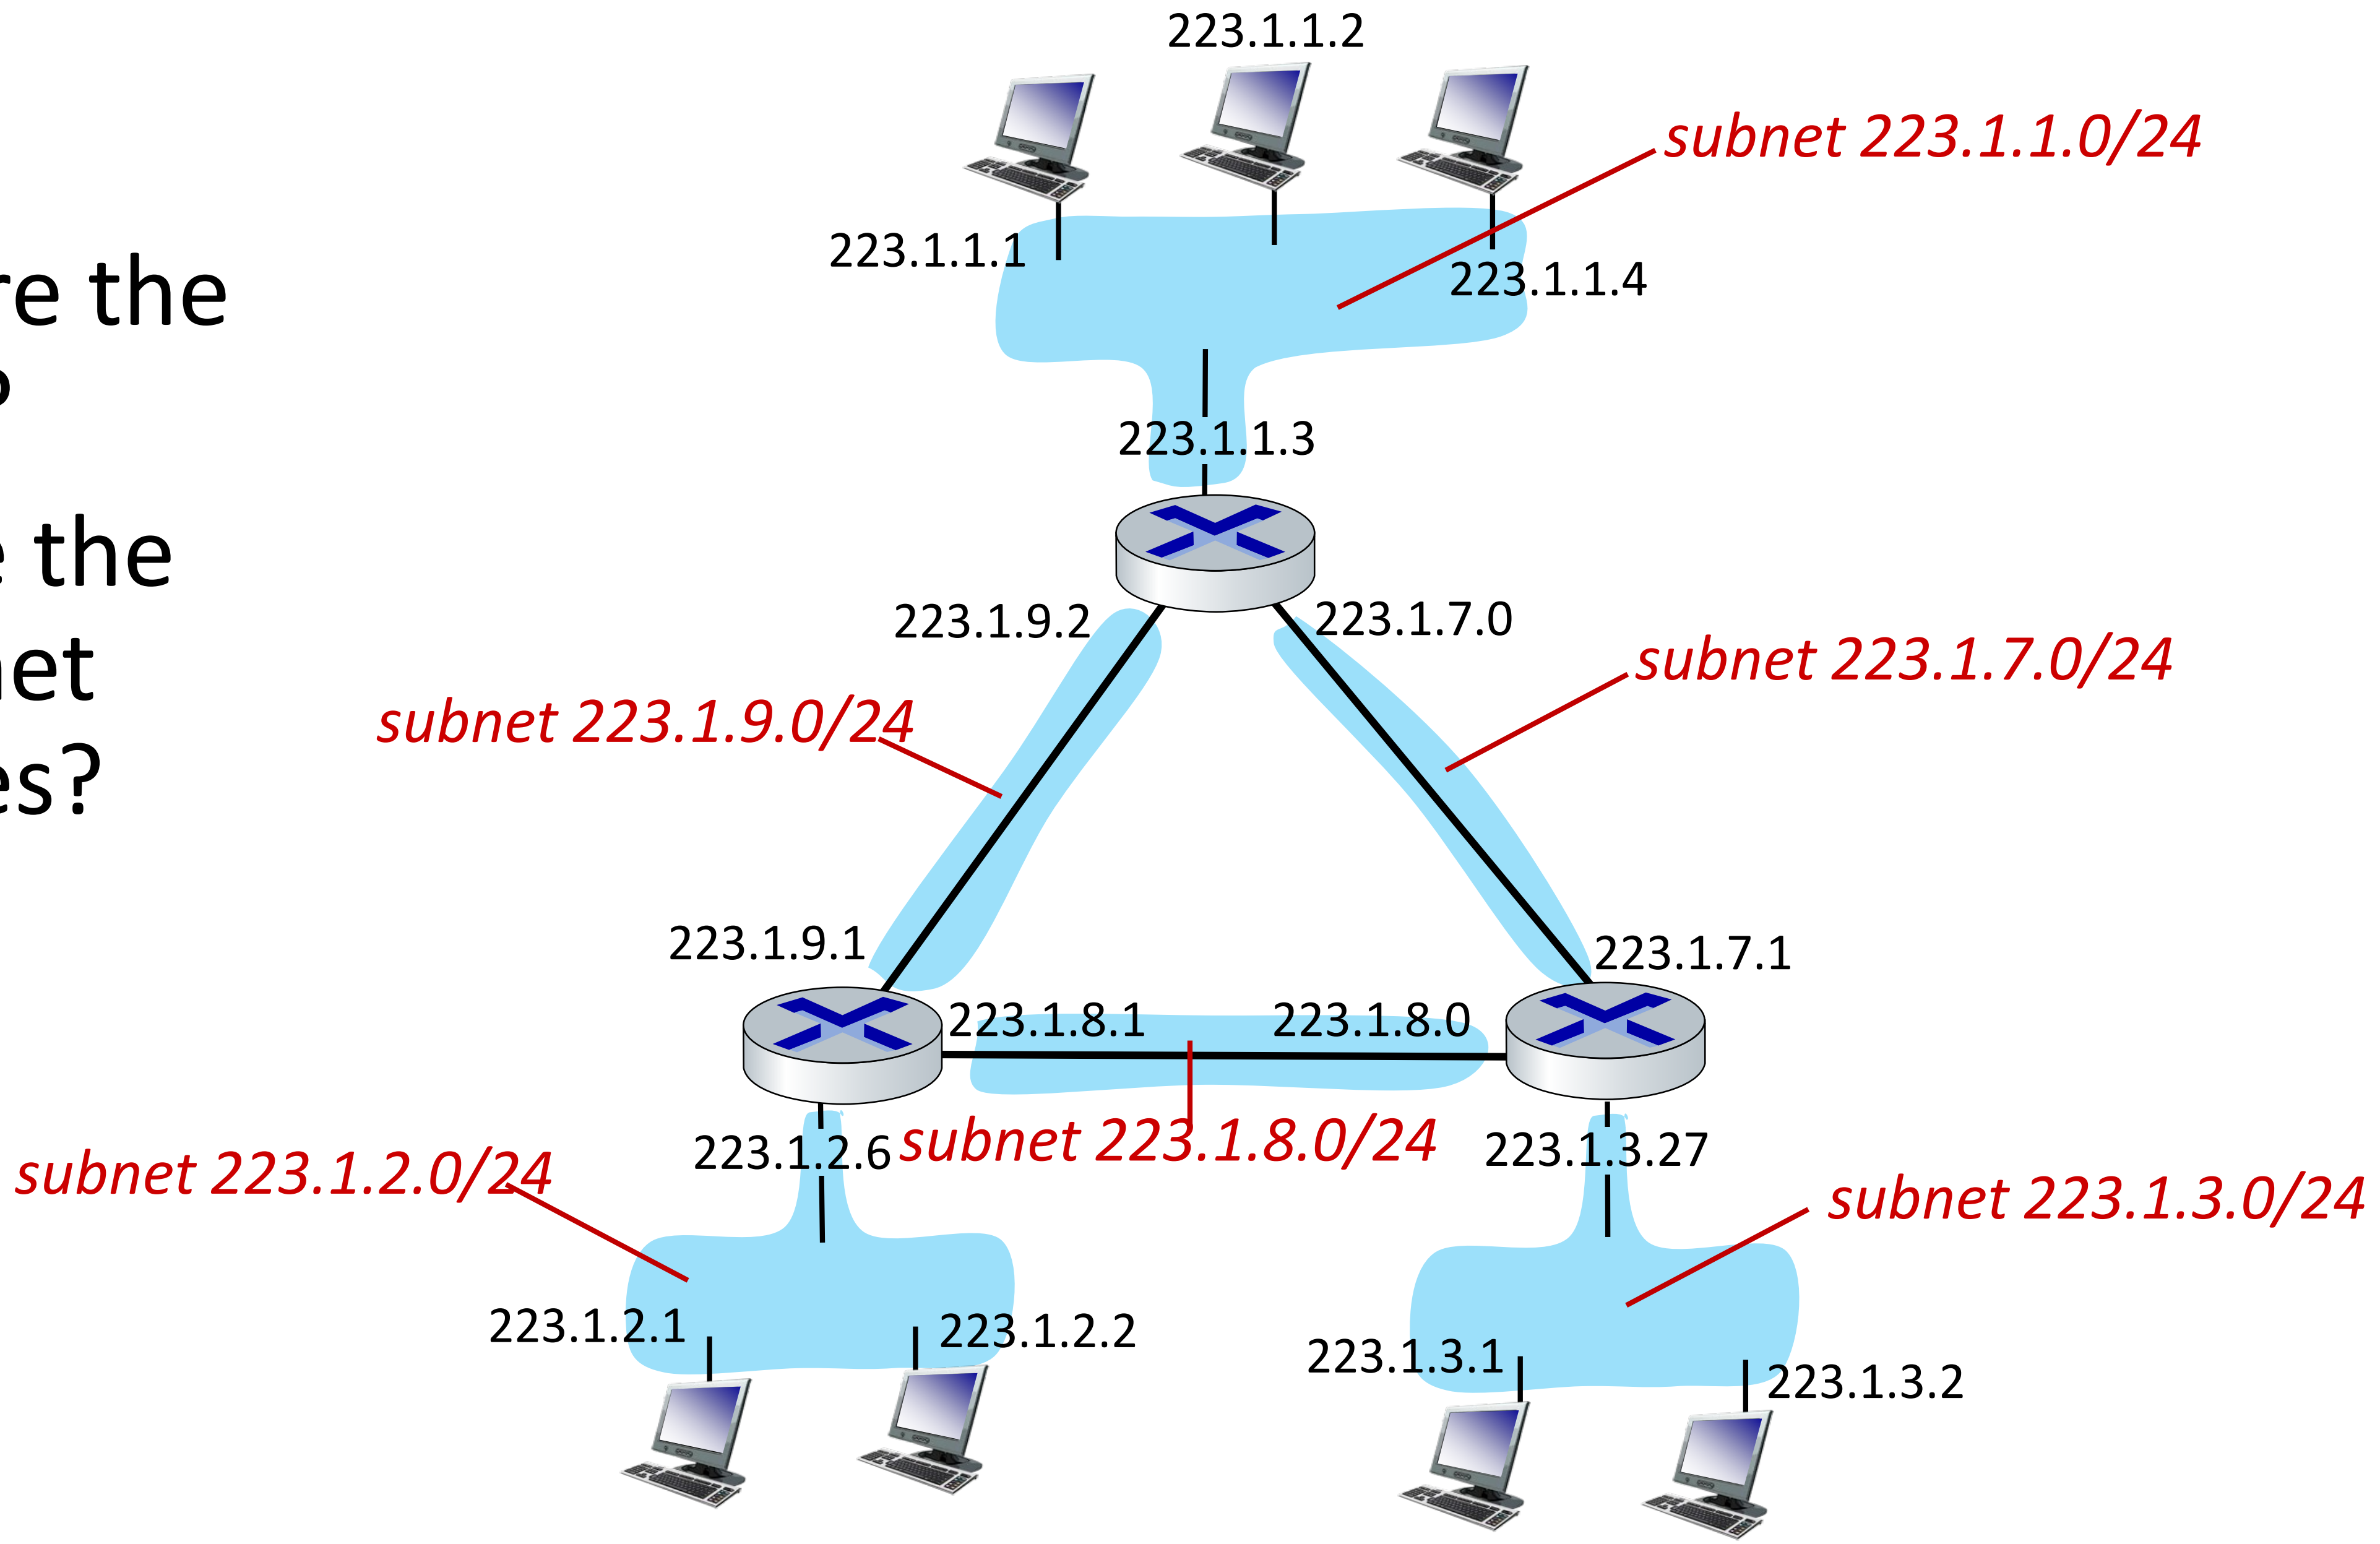

IP addressing: CIDR

CIDR: Classless InterDomain Routing (pronounced "cider")

- subnet portion of address of *arbitrary* length
- address format: a.b.c.d/x, where x is # of bits in subnet portion of address

subnet part

host part

11001000 00010111 00010000 00000000

200.23.16.0/23

IP addresses: how to get one?

That’s actually two questions:

1. Q: How does a *host* get its IP address within its network (host part of address)?
2. Q: How does a *network* get IP address for itself (network part of address)

How does *host* get IP address?

- hard-coded by sysadmin in config file (e.g., /etc/rc.config in UNIX)
- DHCP: Dynamic Host Configuration Protocol: dynamically get address from as server
  - “plug-and-play”

DHCP: Dynamic Host Configuration Protocol

goal: host *dynamically* obtains IP address from network server when it "joins" network

- can renew its lease on address in use
- allows reuse of addresses (only hold address while connected/on)
- support for mobile users who join/leave network

DHCP overview:

- host broadcasts DHCP discover msg [optional]
- DHCP server responds with DHCP offer msg [optional]
- host requests IP address: DHCP request msg
- DHCP server sends address: DHCP ack msg

DHCP client-server scenario

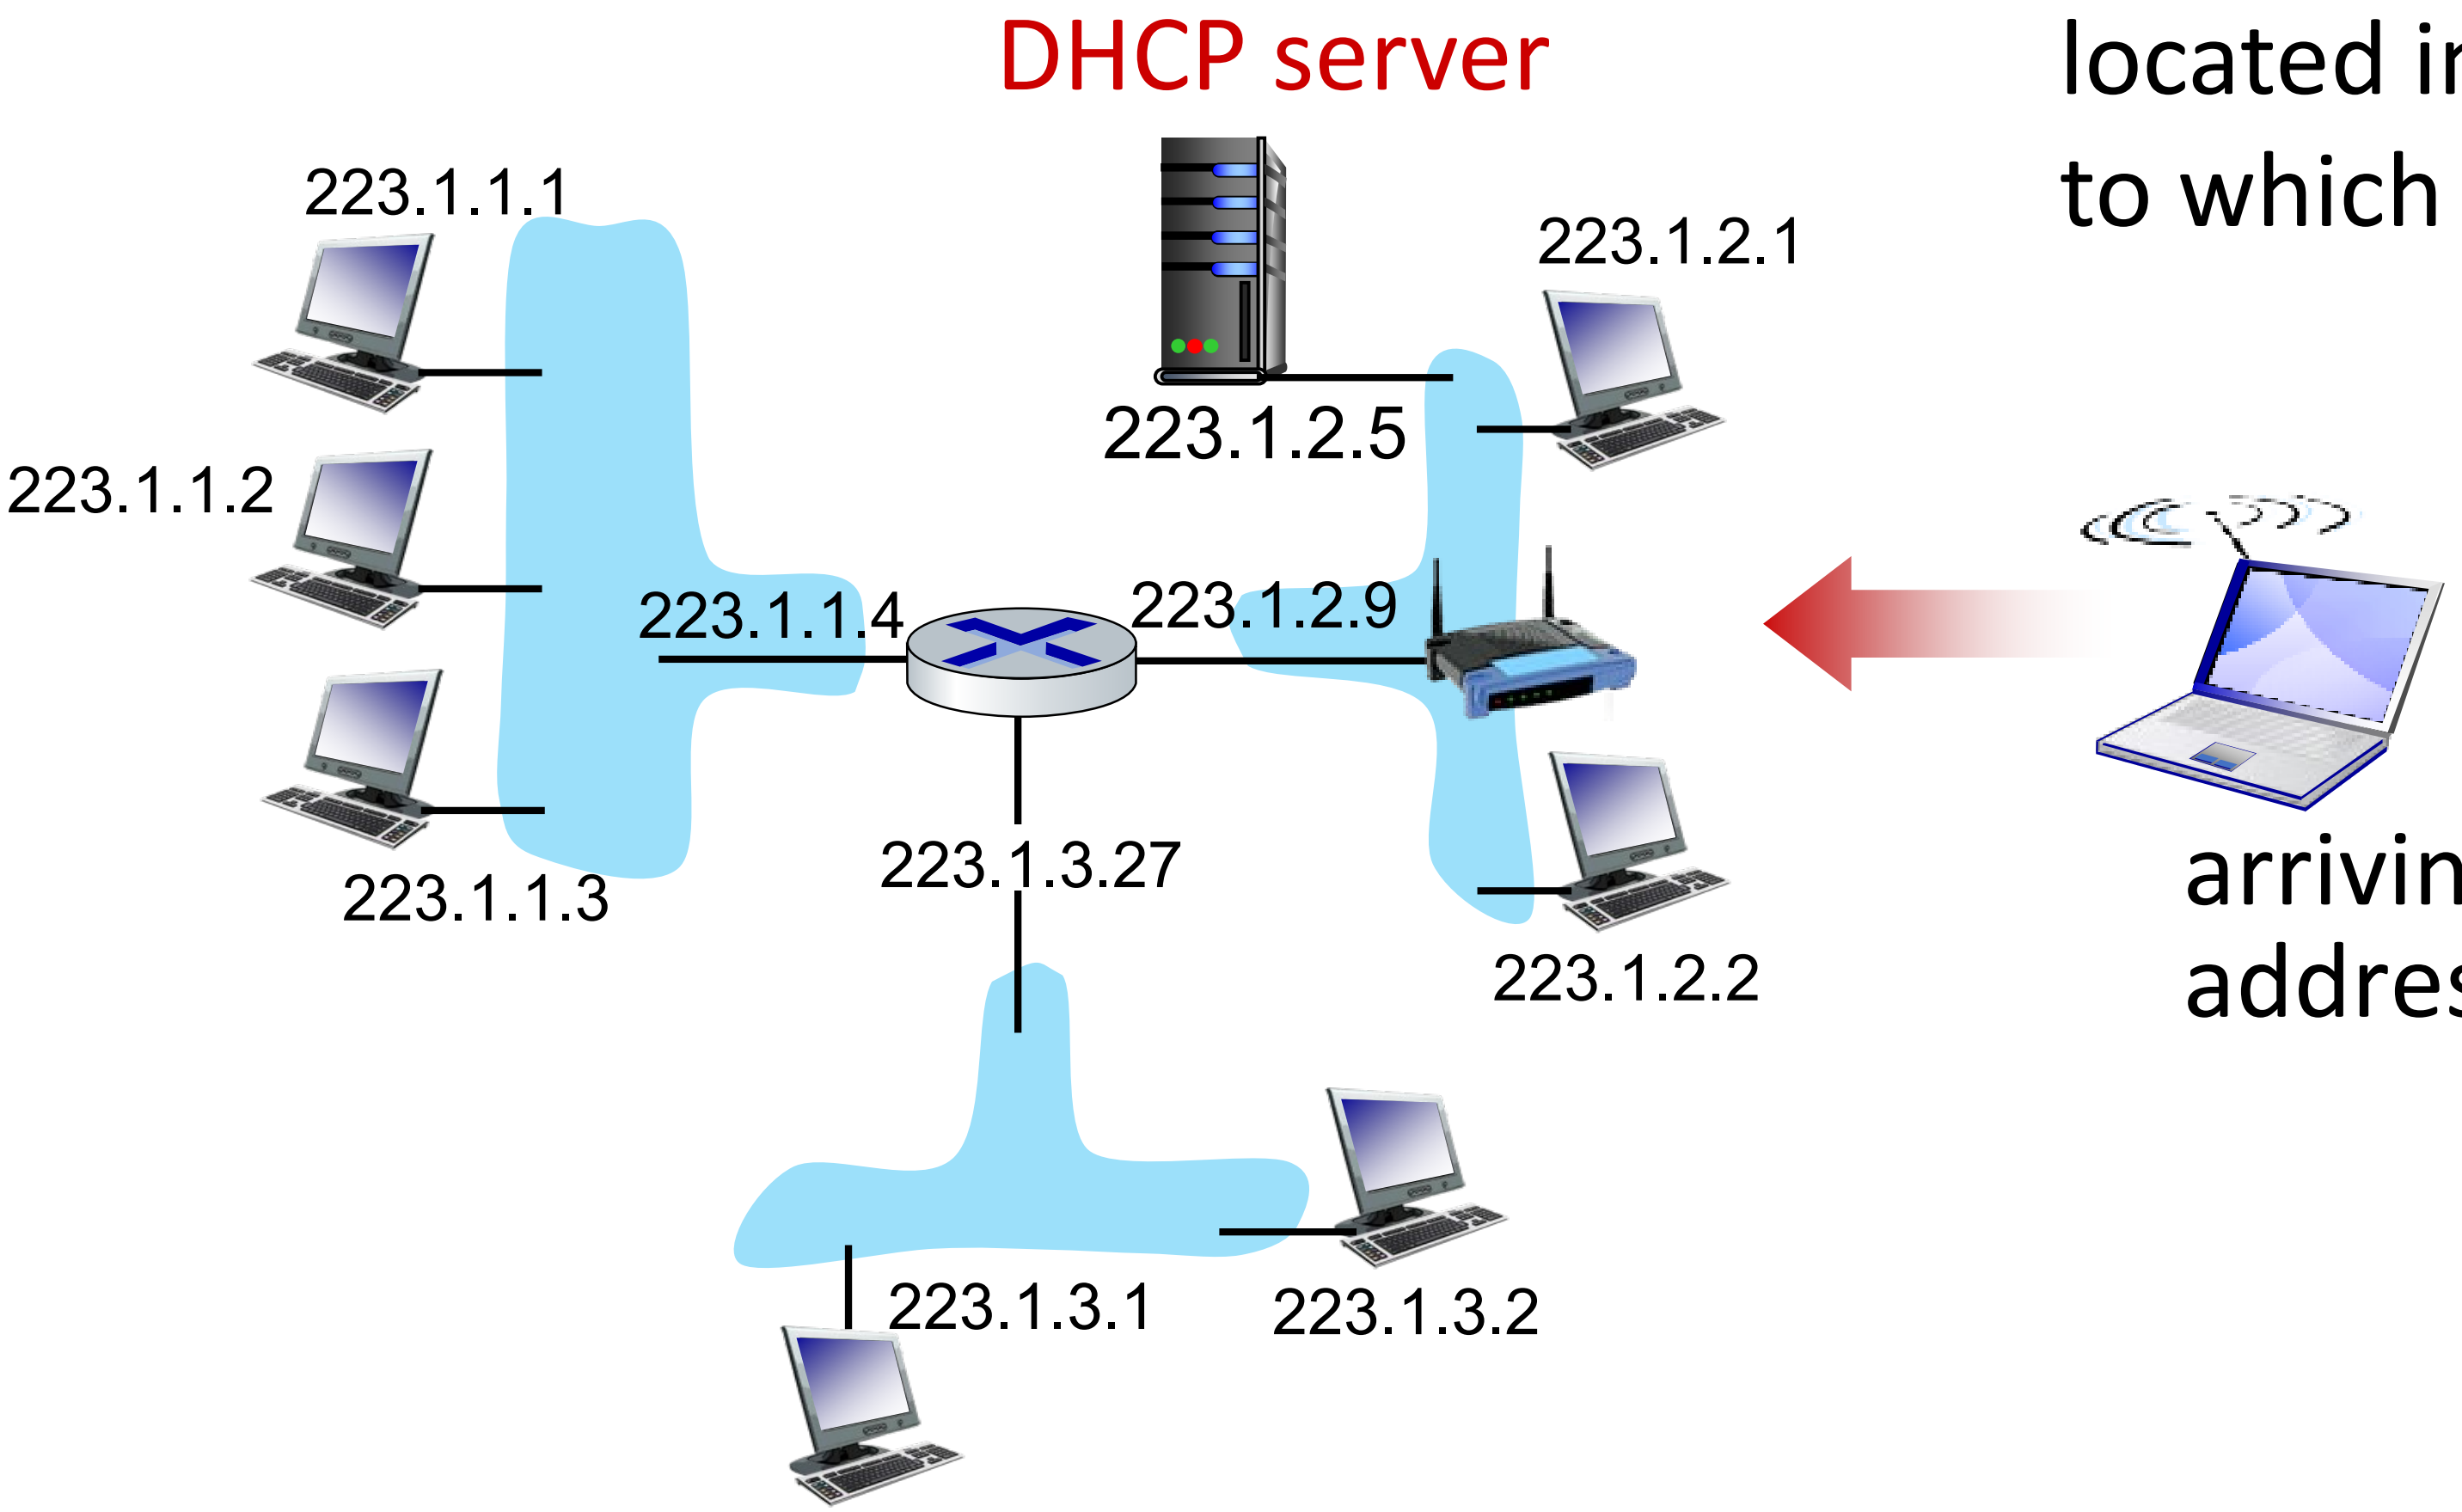

Typically, DHCP server will be co-located in router, serving all subnets to which router is attached

arriving DHCP client needs address in this network

DHCP client-server scenario

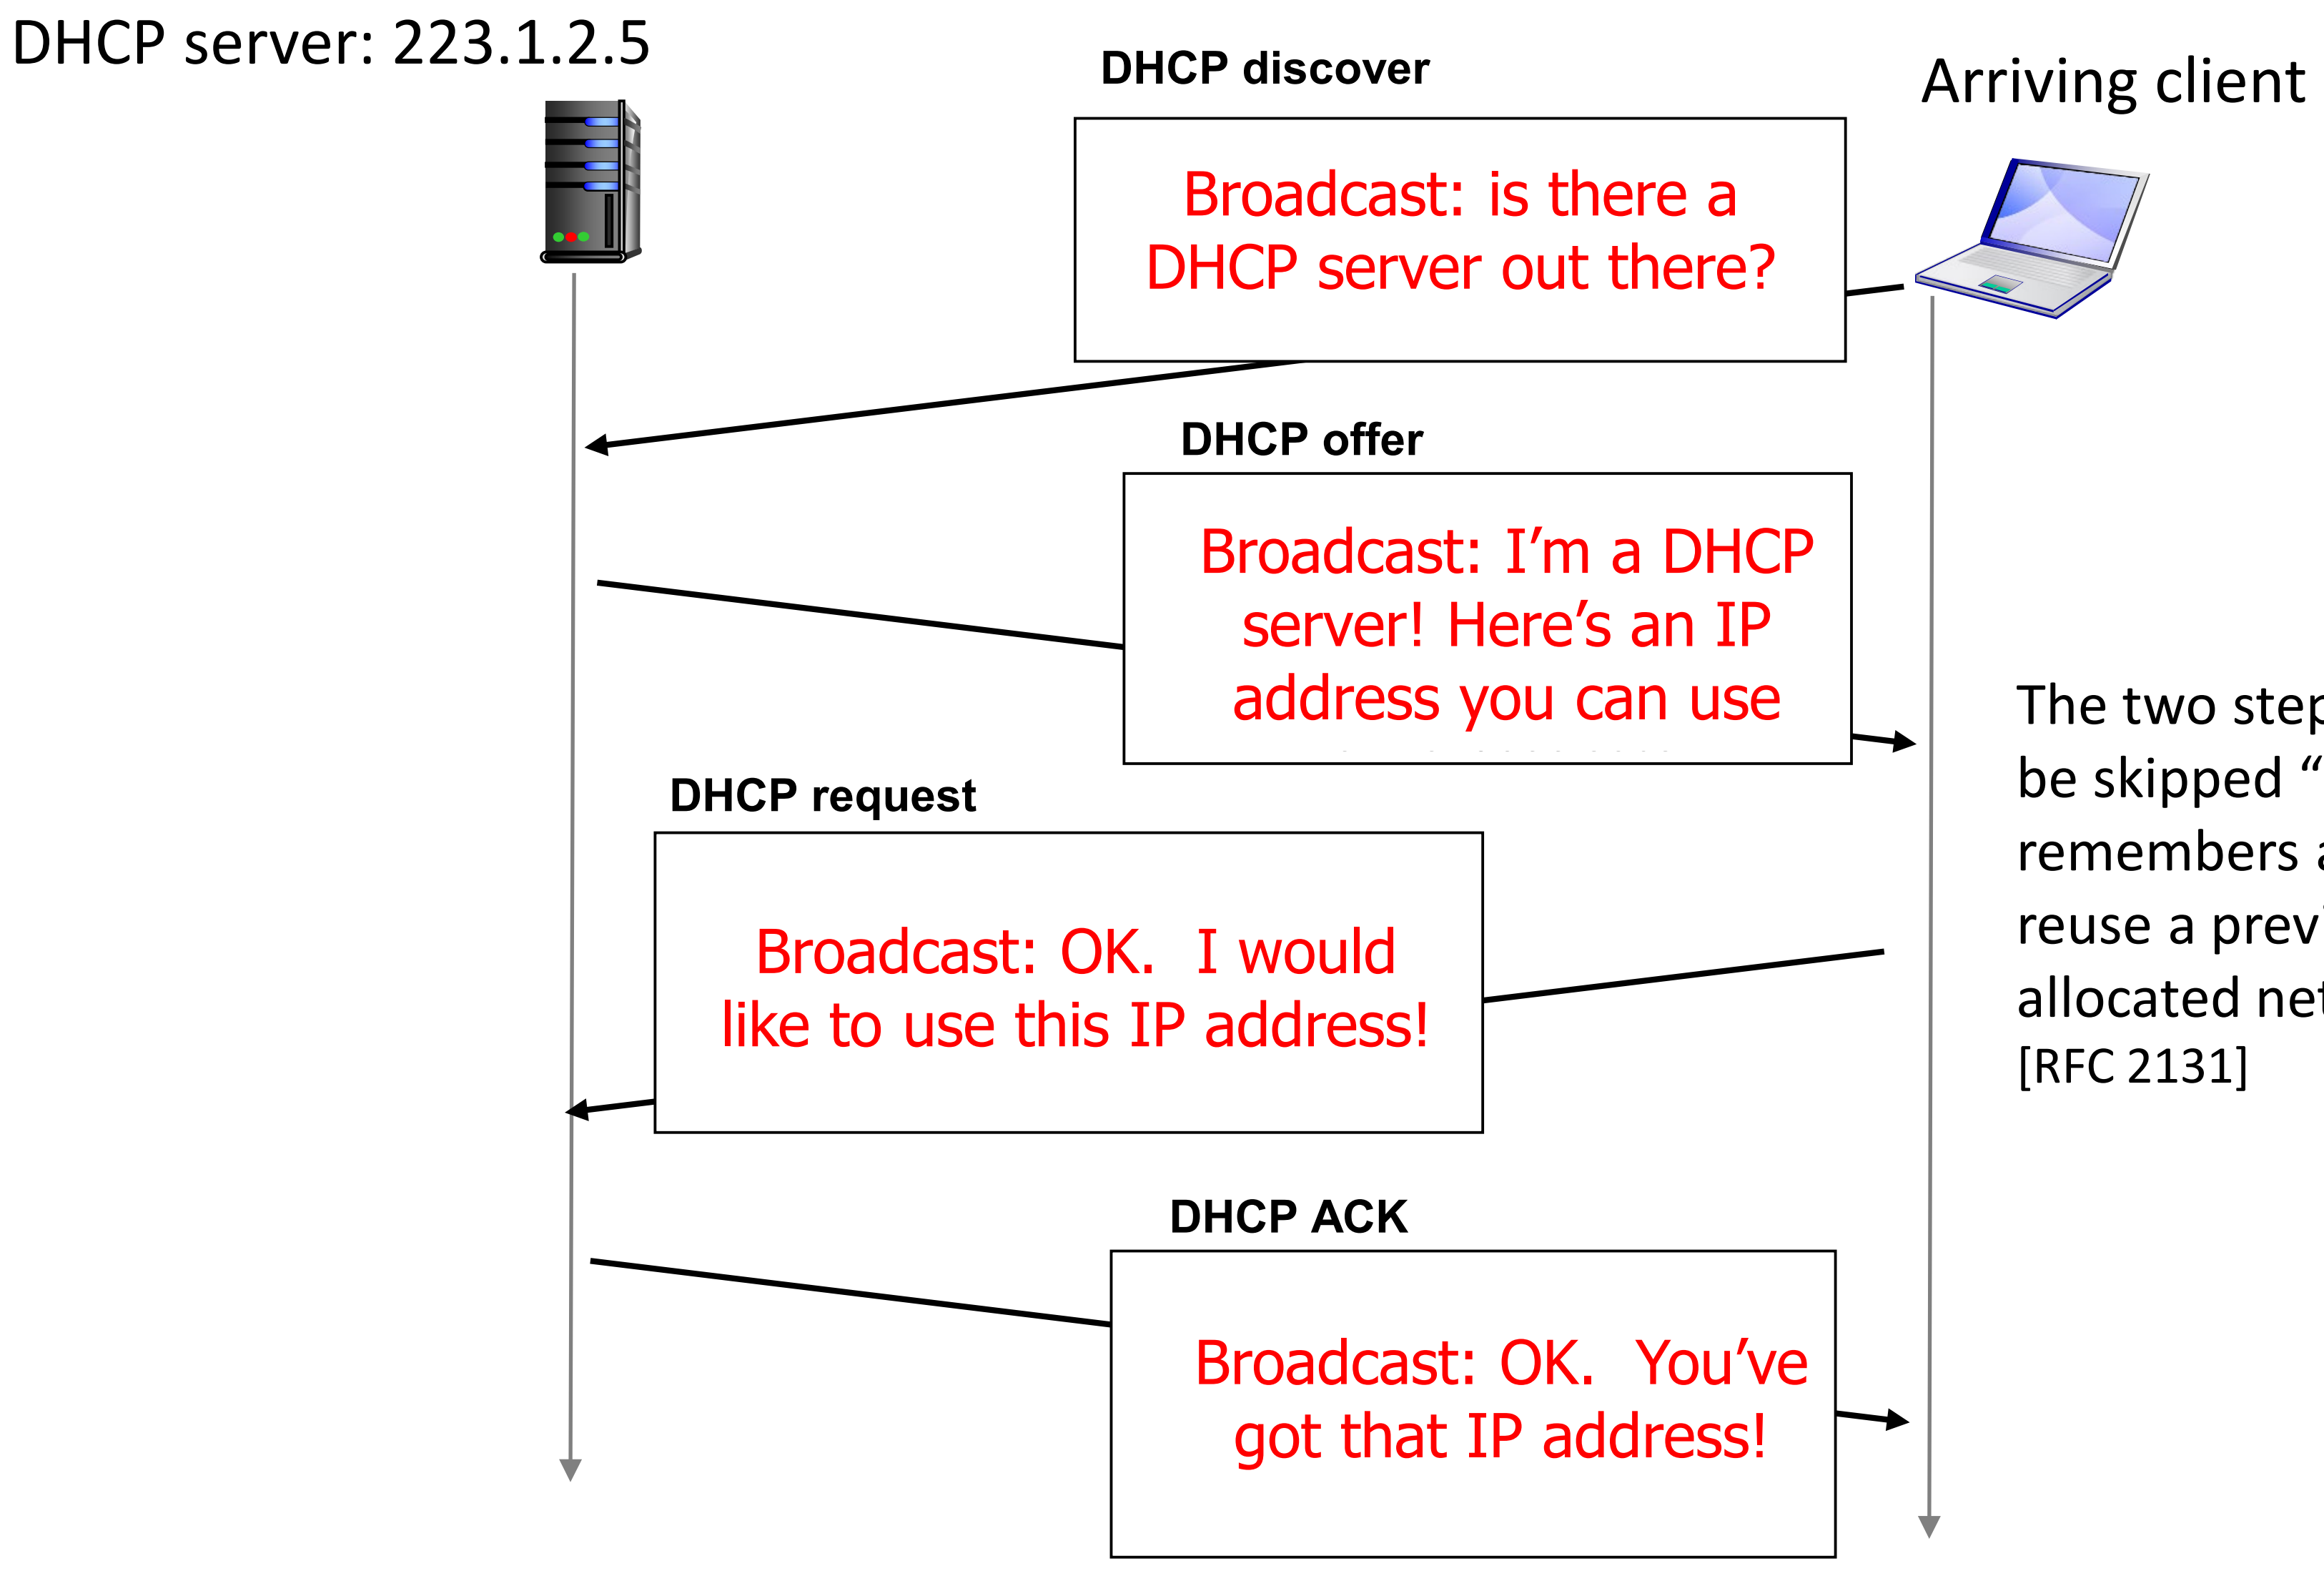

The two steps above can be skipped "if a client remembers and wishes to reuse a previously allocated network address" [RFC 2131]

DHCP: more than IP addresses

DHCP can return more than just allocated IP address on subnet:

- address of first-hop router for client
- name and IP address of DNS server
- network mask (indicating network versus host portion of address)

DHCP: example

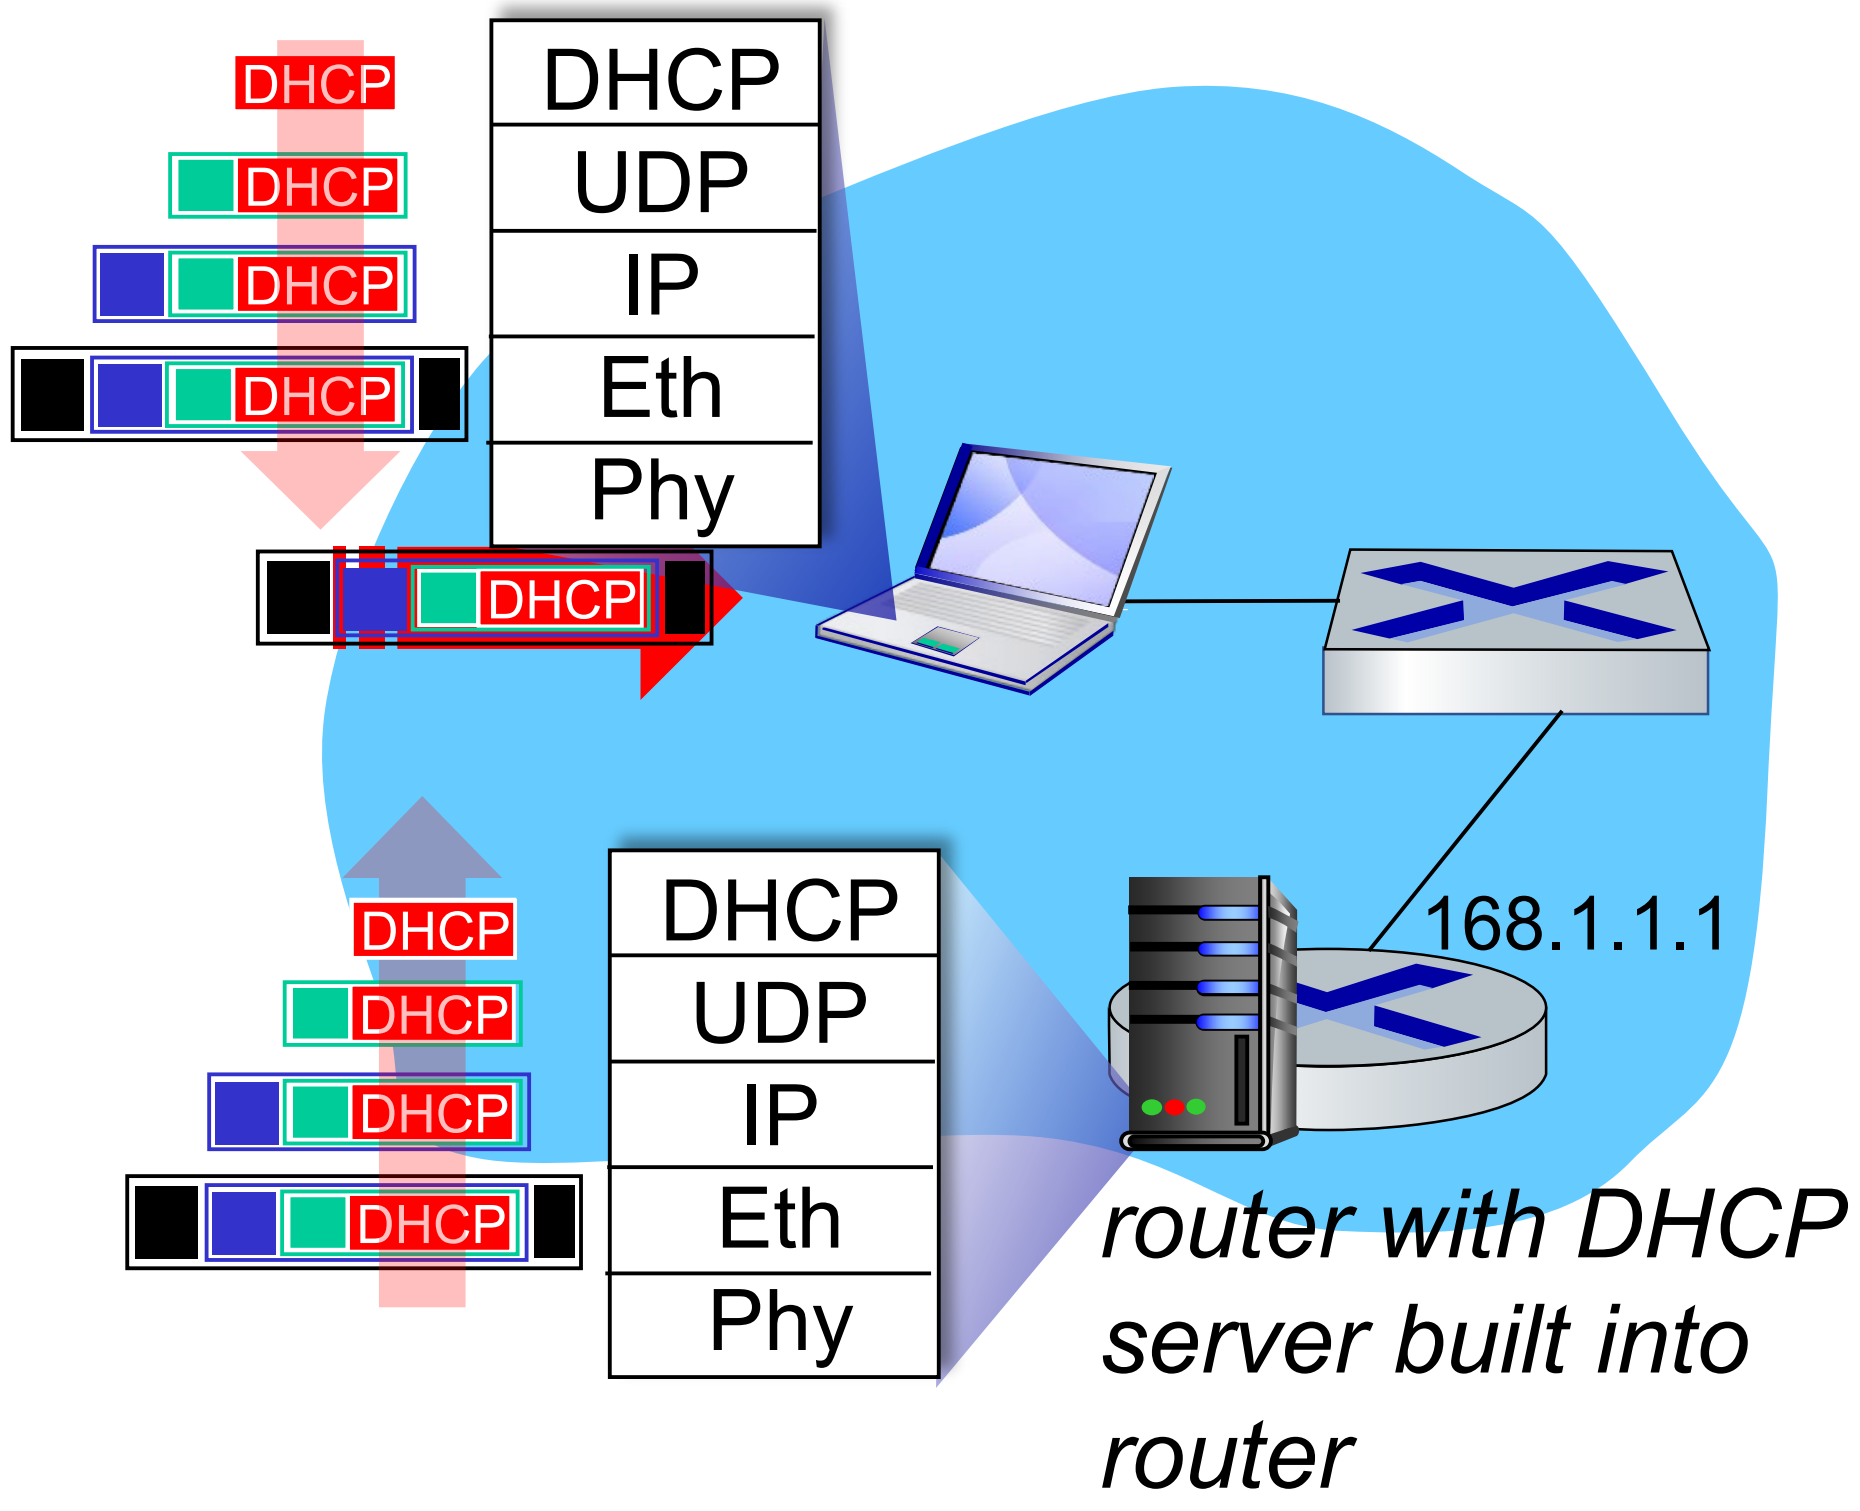

- Connecting laptop will use DHCP to get IP address, address of first-hop router, address of DNS server.
- DHCP REQUEST message encapsulated in UDP, encapsulated in IP, encapsulated in Ethernet
- Ethernet frame broadcast (dest: FFFFFFFFFFFF) on LAN, received at router running DHCP server
- Ethernet demux'ed to IP demux'ed, UDP demux'ed to DHCP

DHCP: example

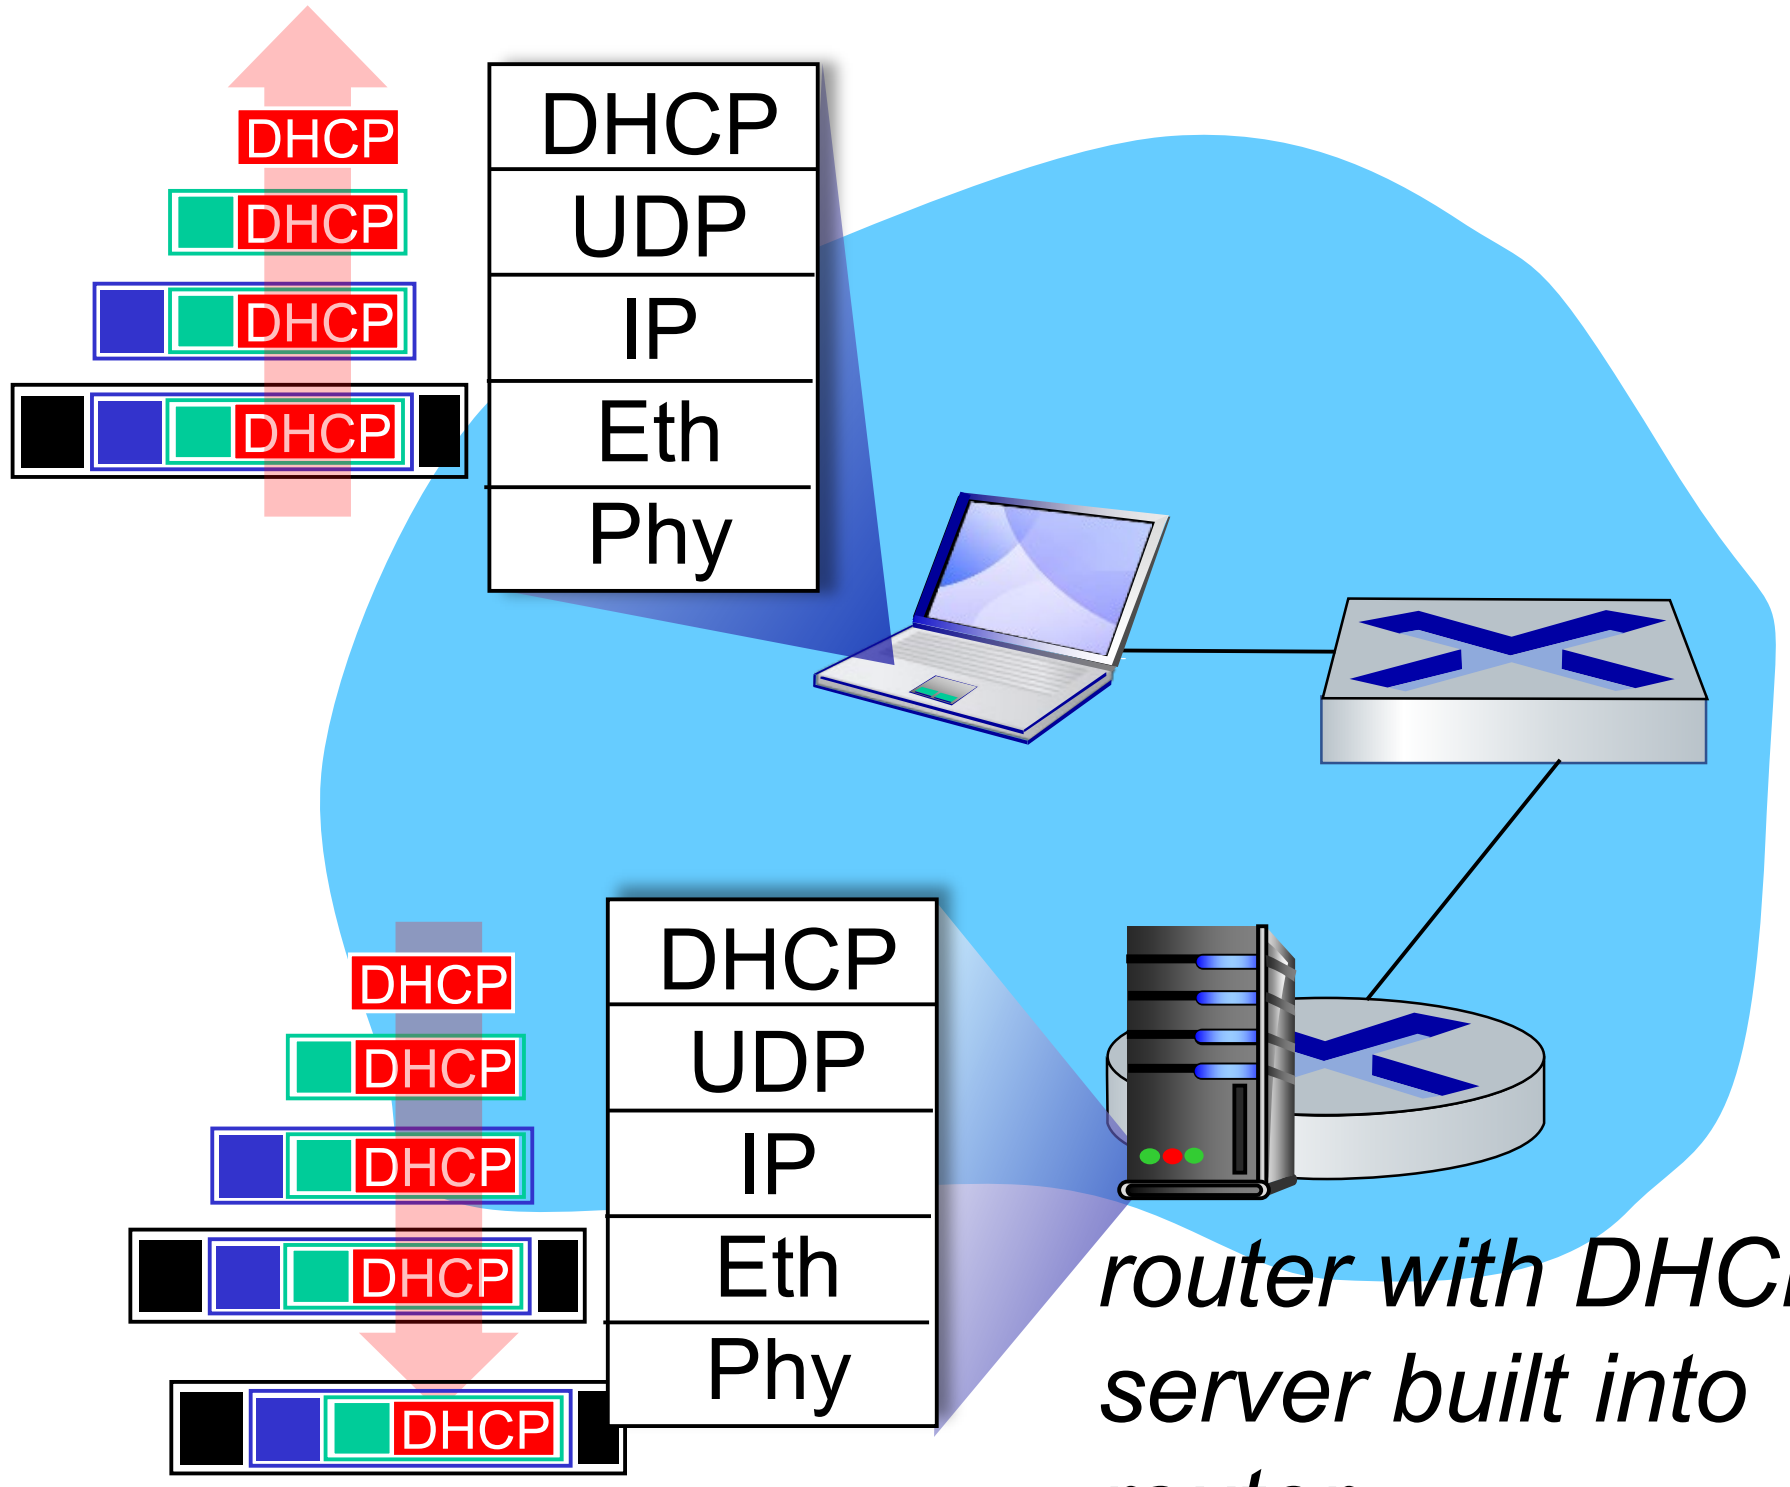

router with DHCP server built into router

- DCP server formulates DHCP ACK containing client's IP address, IP address of first-hop router for client, name & IP address of DNS server
- encapsulated DHCP server reply forwarded to client, demuxing up to DHCP at client
- client now knows its IP address, name and IP address of DNS server, IP address of its first-hop router

IP addresses: how to get one?

Q: how does *network* get subnet part of IP address?

A: gets allocated portion of its provider ISP's address space

ISP's block	11001000 00010111 00010000 00000000	200.23.16.0/20

ISP can then allocate out its address space in 8 blocks:

Organization 0	11001000 00010111 00010000 00000000	200.23.16.0/23
Organization 1	11001000 00010111 00010010 00000000	200.23.18.0/23
Organization 2	11001000 00010111 00010100 00000000	200.23.20.0/23
...	....	....
Organization 7	11001000 00010111 00011110 00000000	200.23.30.0/23

Hierarchical addressing: route aggregation

hierarchical addressing allows efficient advertisement of routing information:

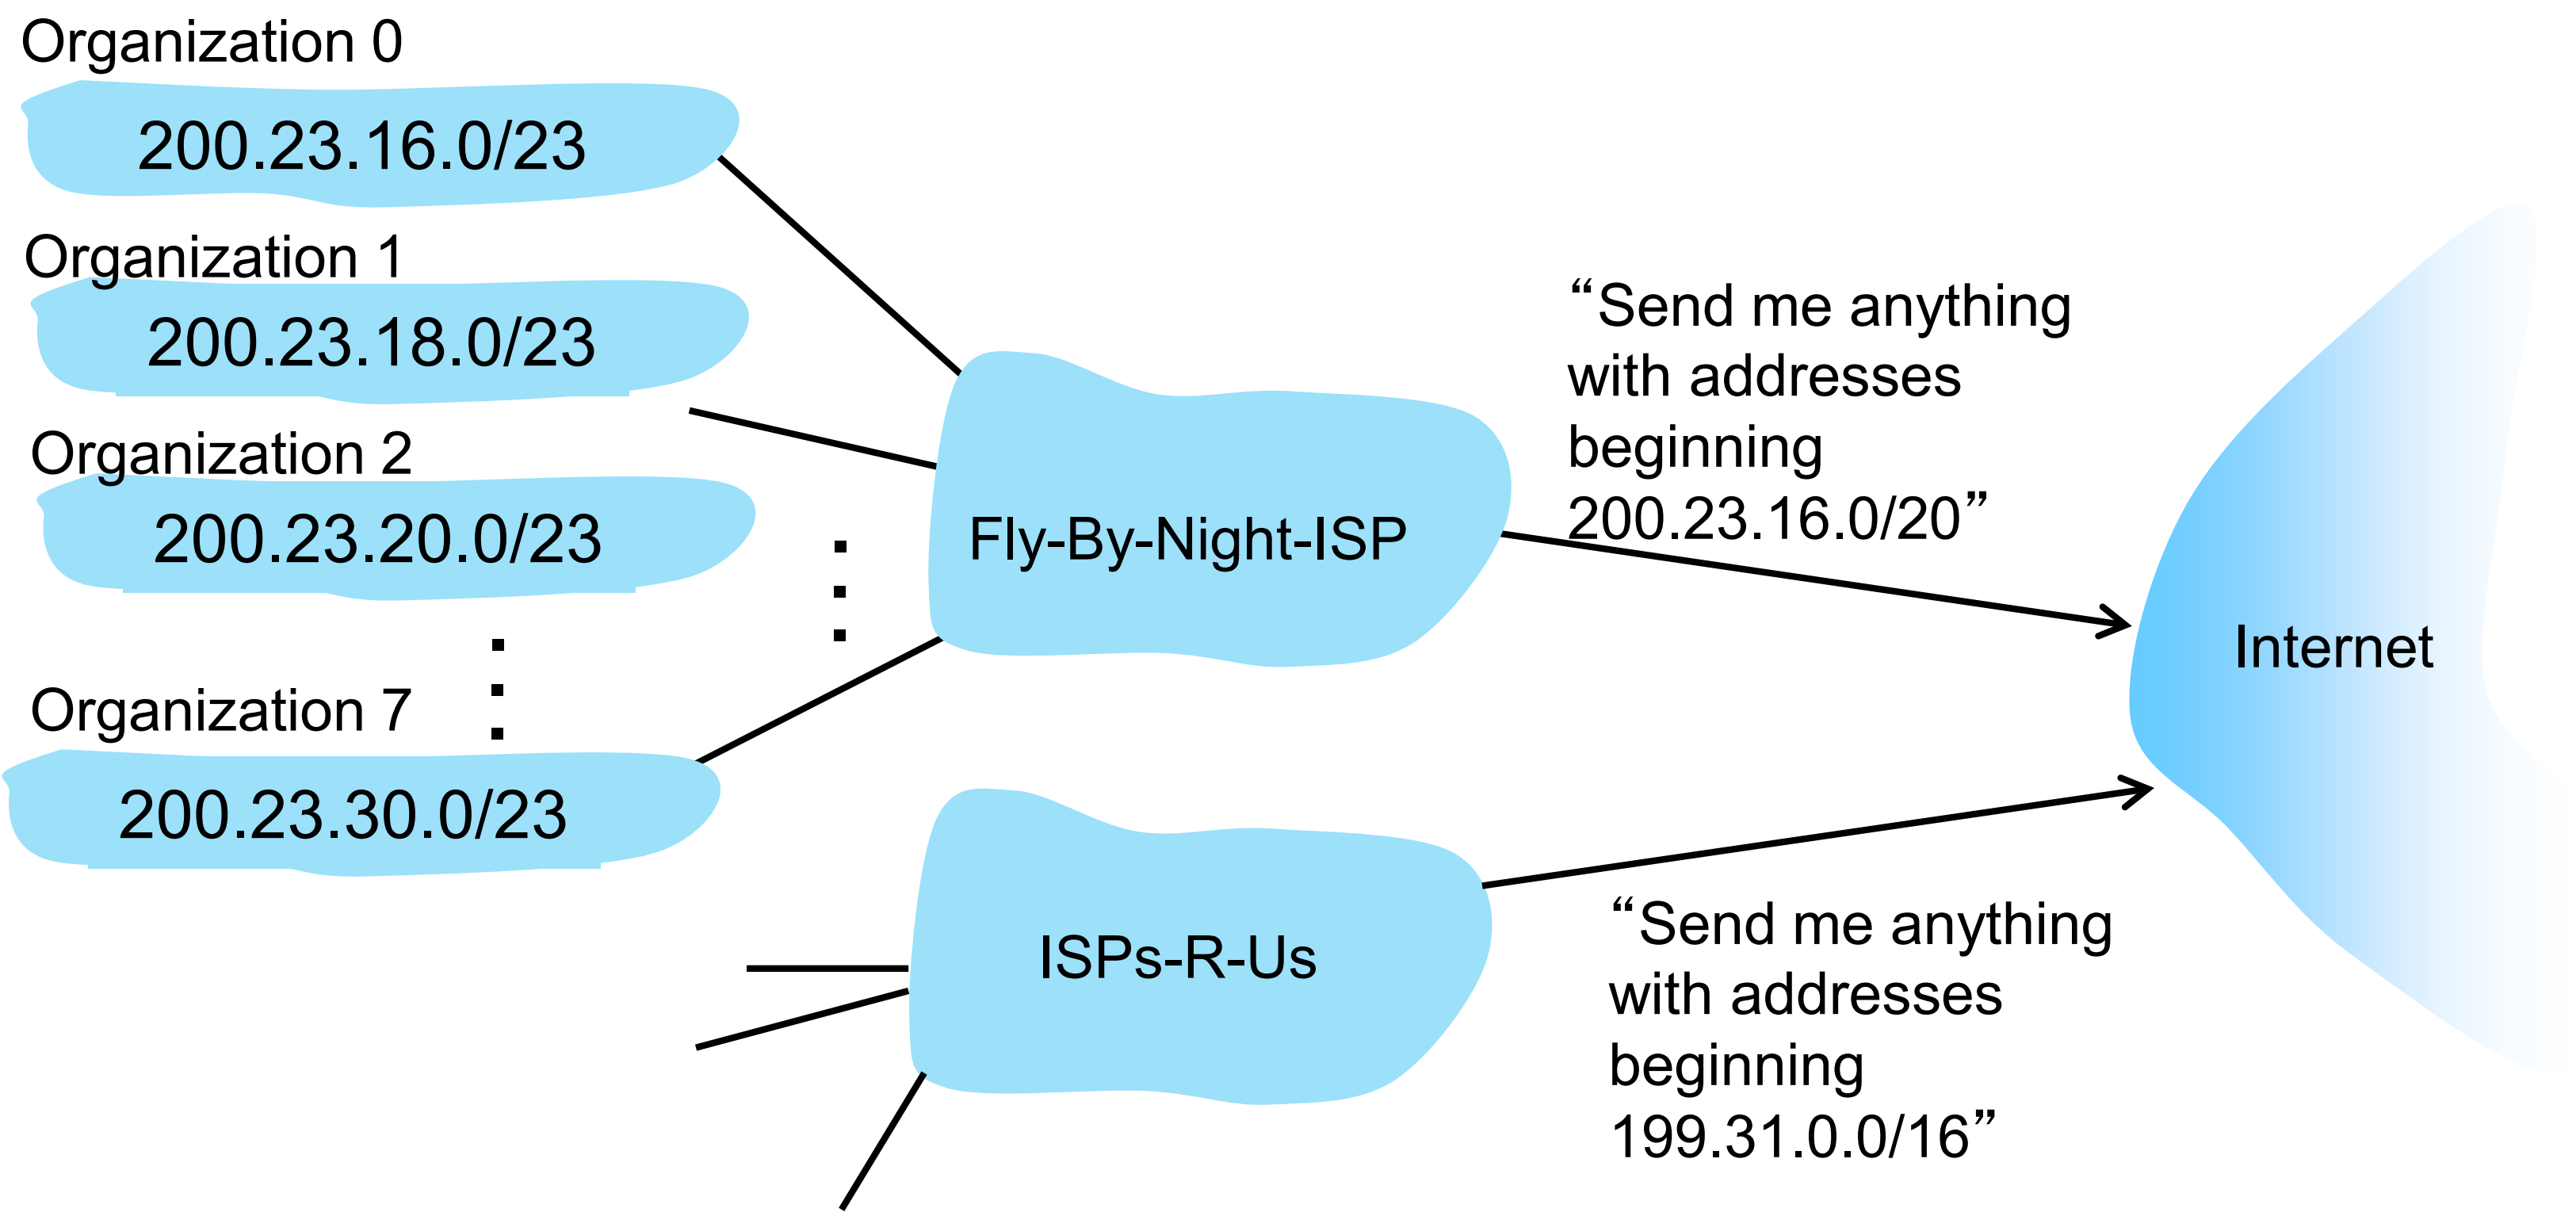

Hierarchical addressing: more specific routes

- Organization 1 moves from Fly-By-Night-ISP to ISPs-R-Us
- ISPs-R-Us now advertises a more specific route to Organization 1

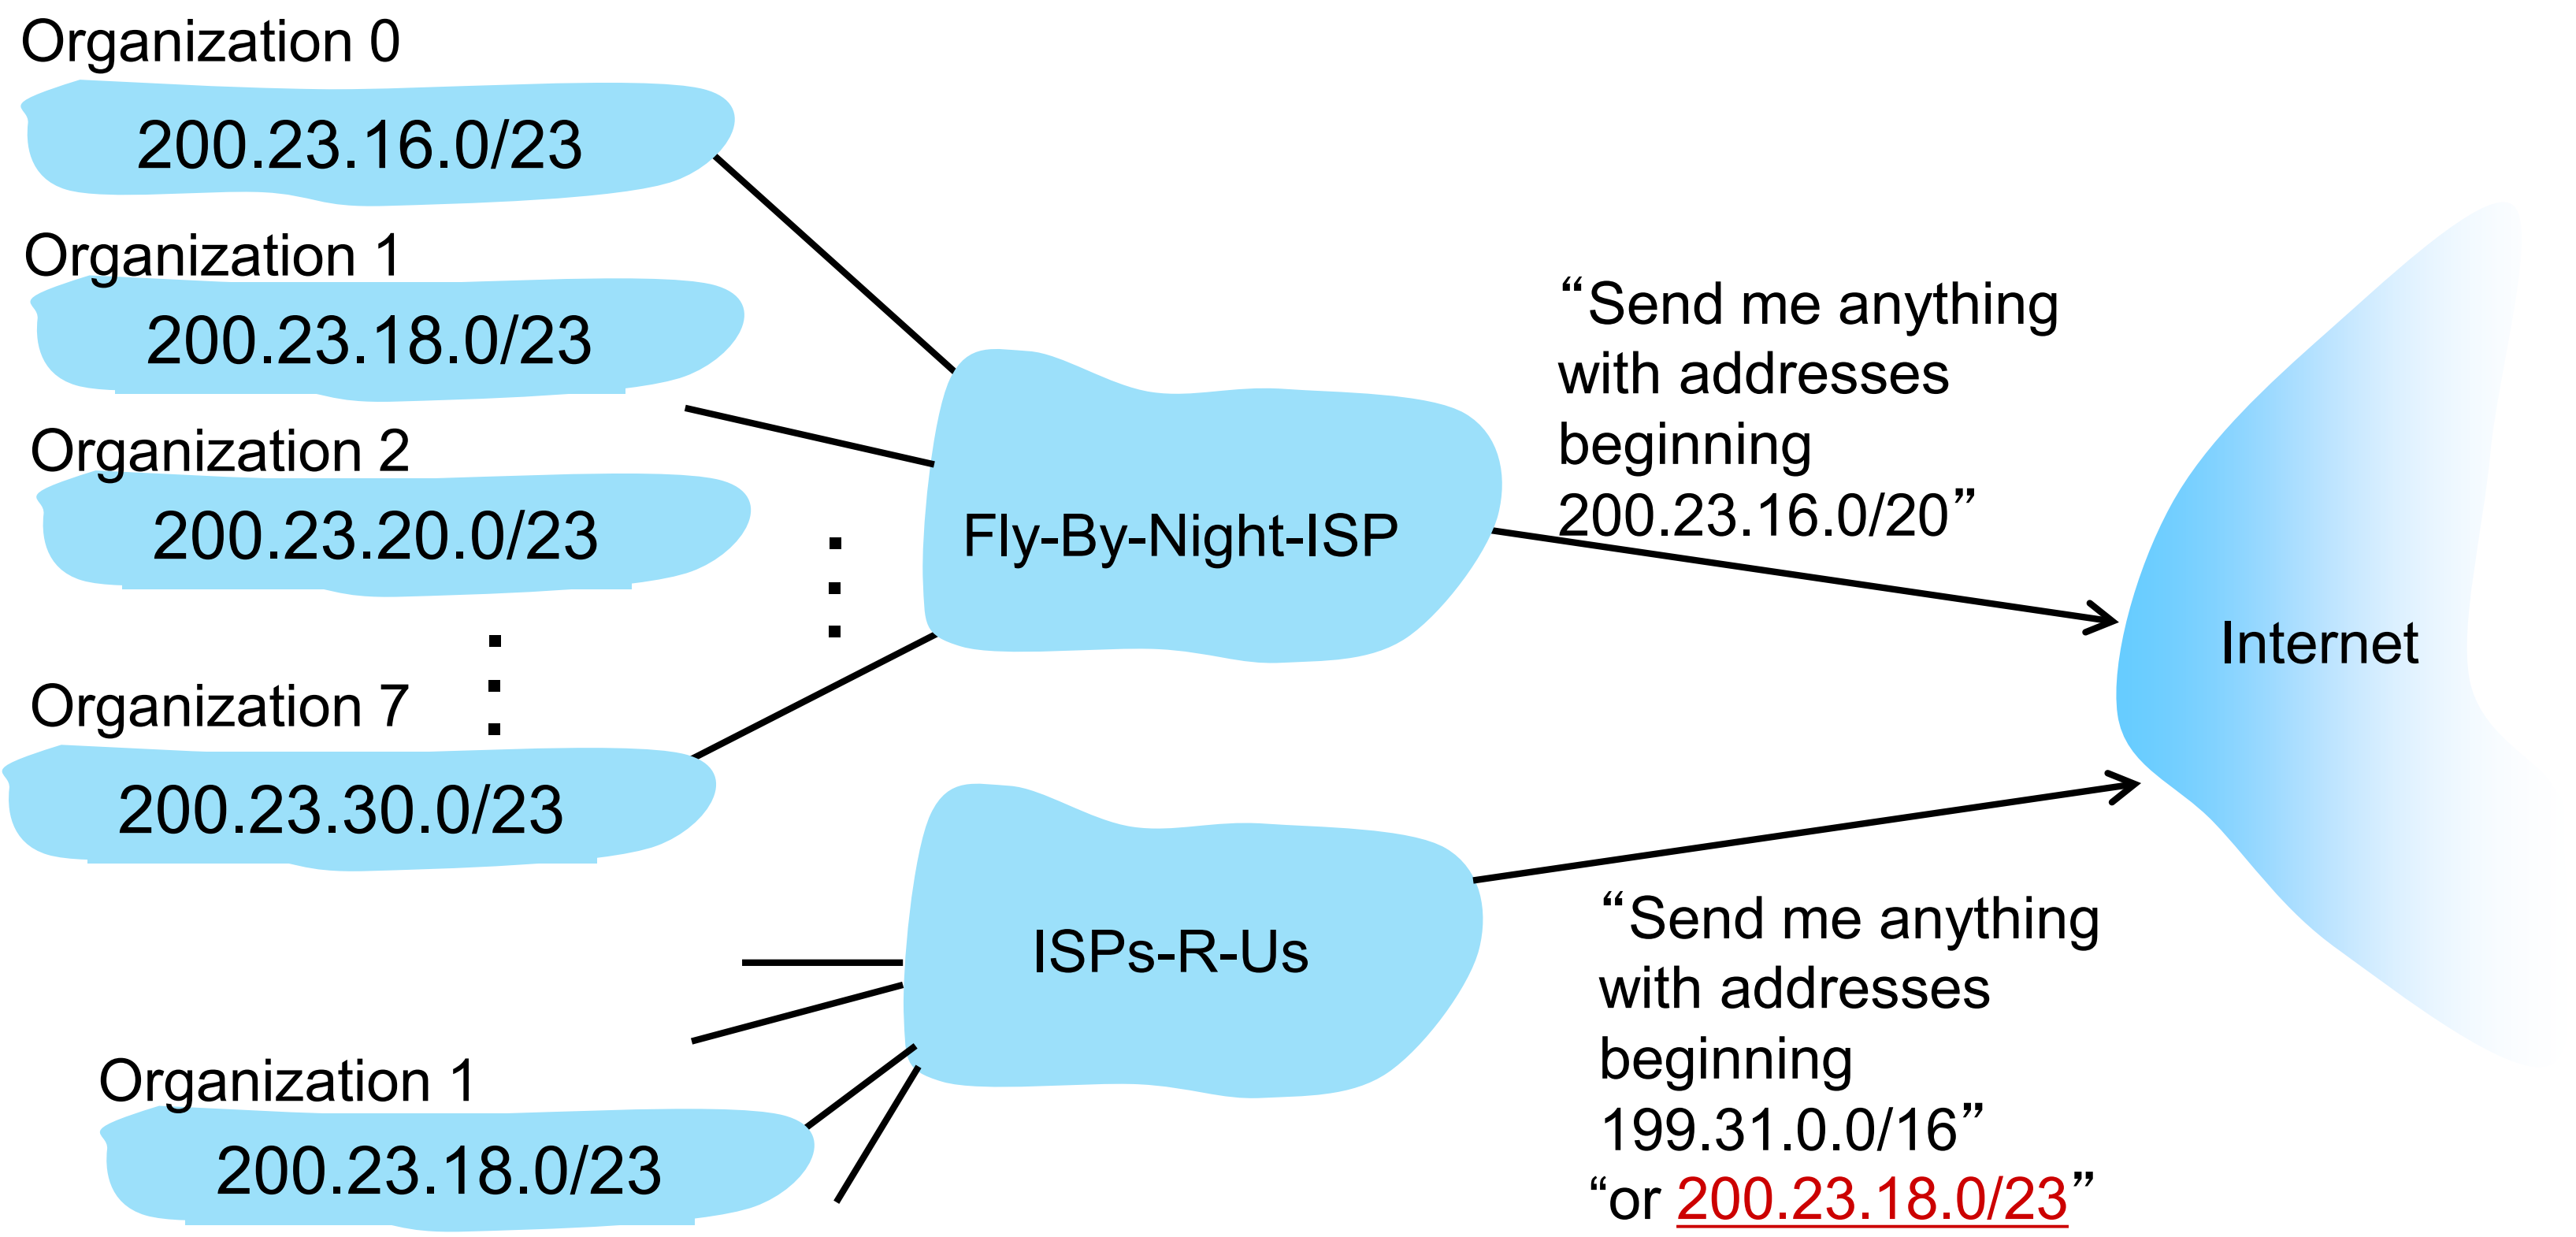

Hierarchical addressing: more specific routes

- Organization 1 moves from Fly-By-Night-ISP to ISPs-R-Us
- ISPs-R-Us now advertises a more specific route to Organization 1

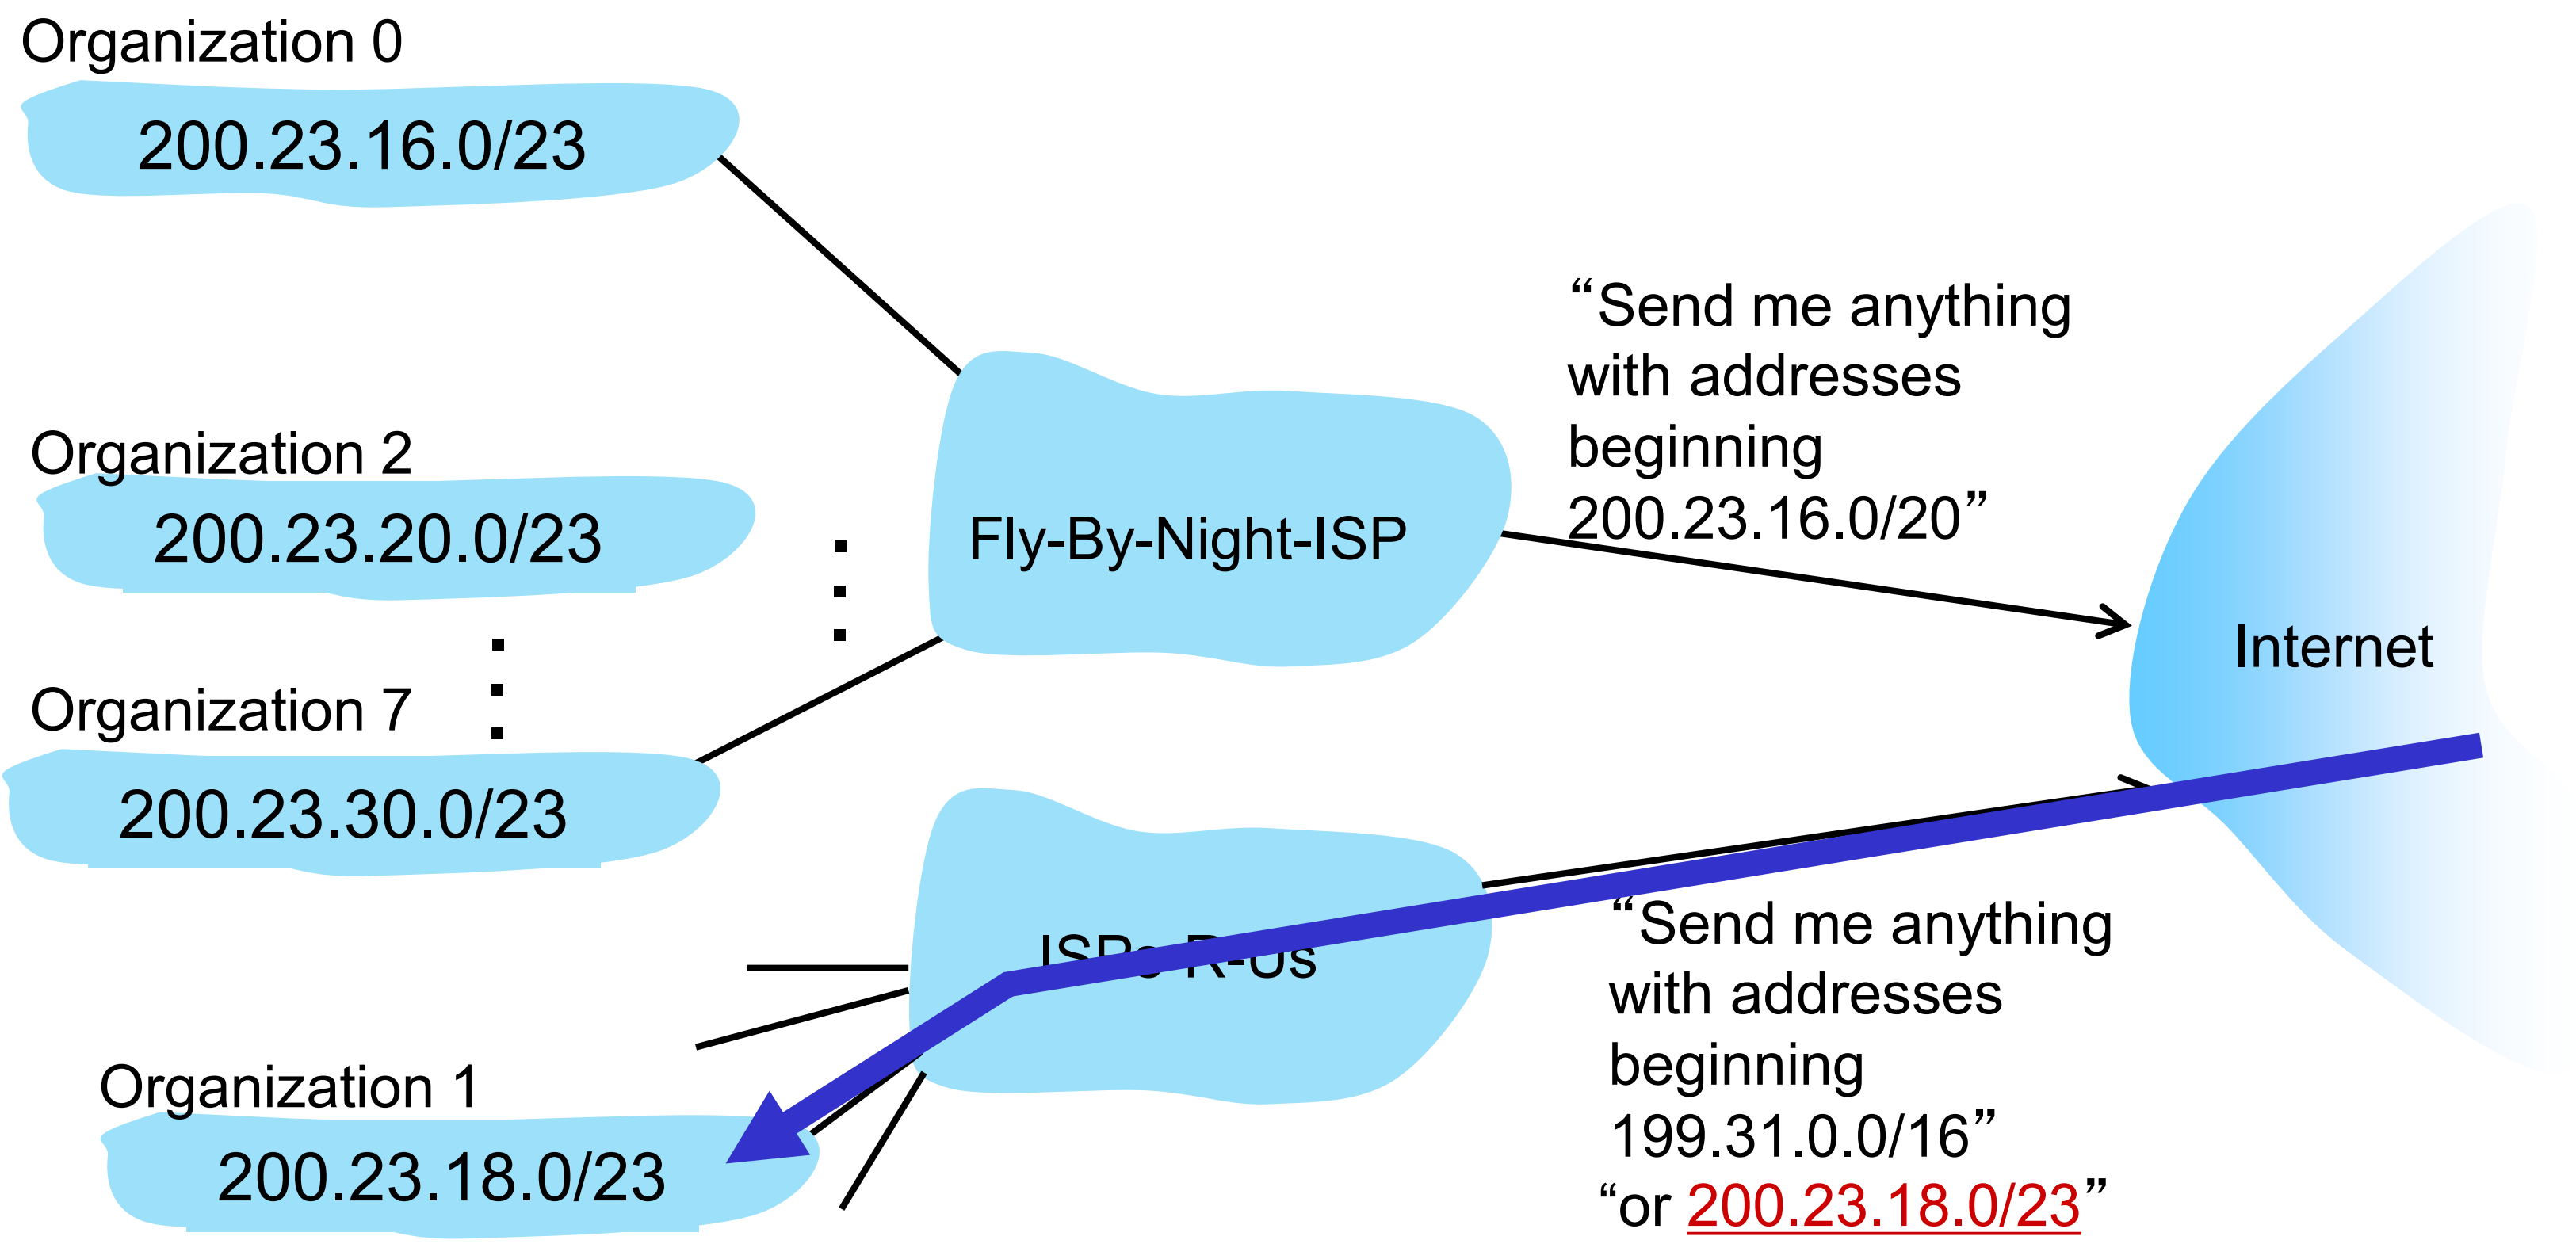

IP addressing: last words ...

Q: how does an ISP get block of addresses?

A: ICANN: Internet Corporation for Assigned Names and Numbers http://www.icann.org/

- allocates IP addresses, through 5 regional registries (RRs) (who may then allocate to local registries)
- manages DNS root zone, including delegation of individual TLD (.com, .edu , …) management

Q: are there enough 32-bit IP addresses?

- ICANN allocated last chunk of IPv4 addresses to RRs in 2011
- NAT (next) helps IPv4 address space exhaustion
- IPv6 has 128-bit address space

Network layer: "data plane" roadmap

- Network layer: overview
  - data plane
  - control plane
- What's inside a router
  - input ports, switching, output ports
  - buffer management, scheduling
- IP: the Internet Protocol
  - datagram format
  - addressing
  - network address translation

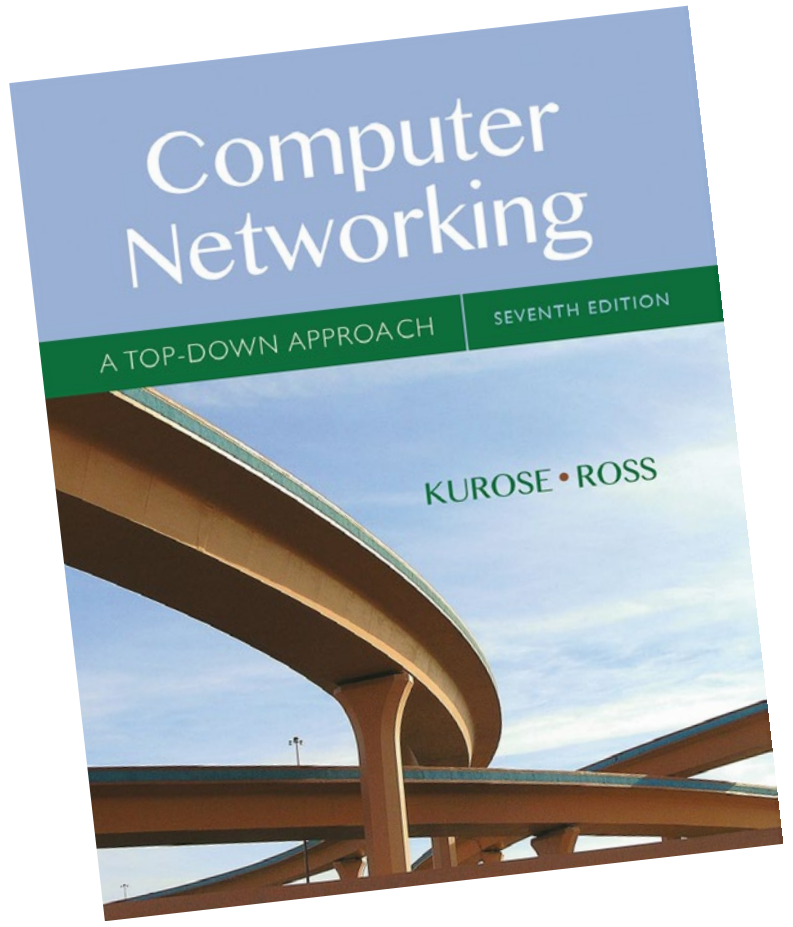

Chapter 4

- Generalized Forwarding, SDN
  - match+action
  - OpenFlow: match+action in action

NAT: network address translation

NAT: all devices in local network share just one IPv4 address as far as outside world is concerned

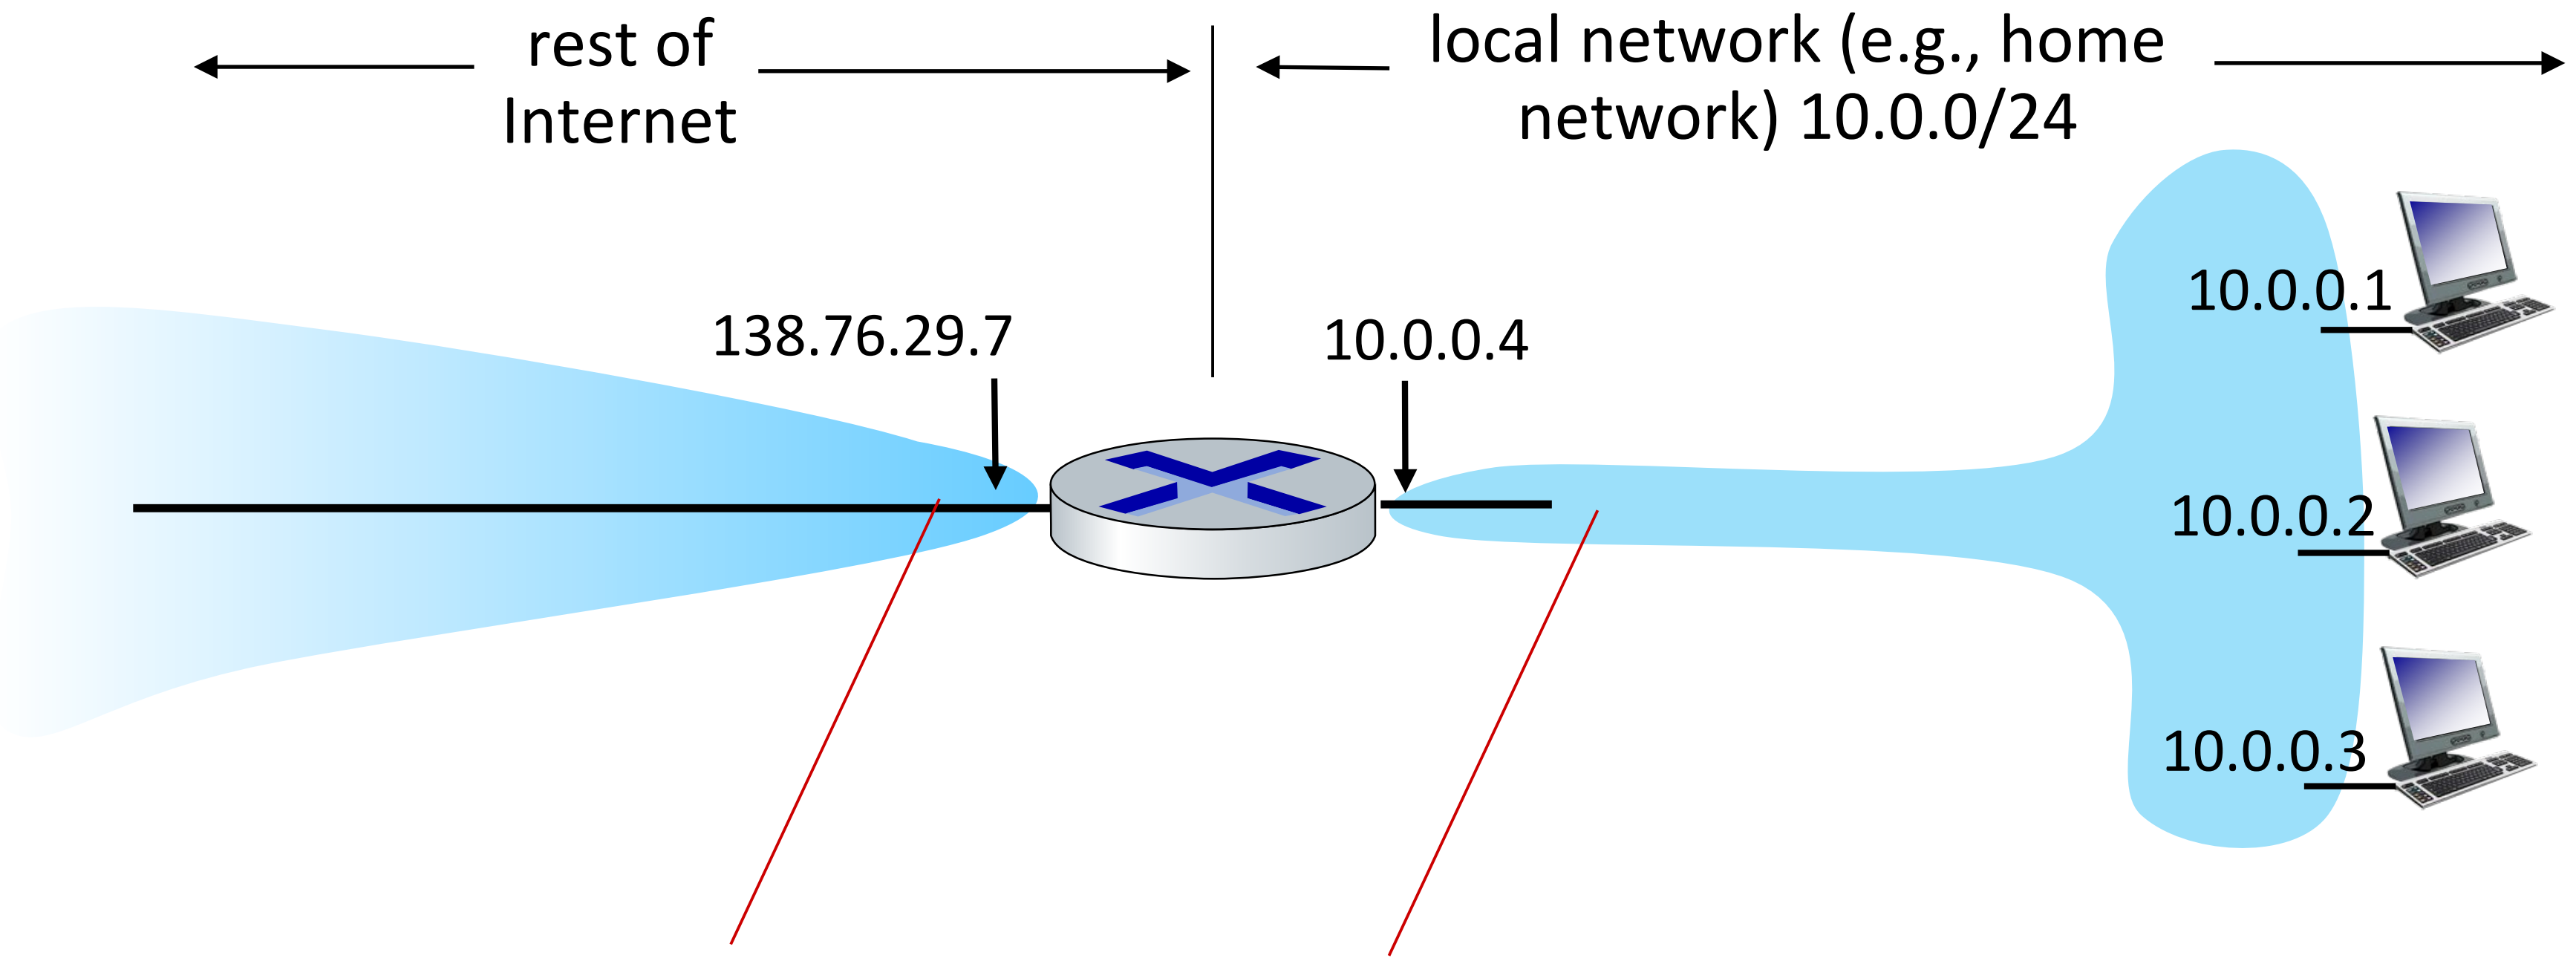

all datagrams *leaving* local network have *same* source NAT IP address: 138.76.29.7, but *different* source port numbers

datagrams with source or destination in this network have 10.0.0/24 address for source, destination (as usual)

NAT: network address translation

- all devices in local network have 32-bit addresses in a "private" IP address space (10/8, 172.16/12, 192.168/16 prefixes) that can only be used in local network
- advantages:
  - just one IP address needed from provider ISP for *all* devices
  - can change addresses of hosts in local network without notifying outside world
  - can change ISP without changing addresses of devices in local network
  - security: devices inside local net not directly addressable/visible by outside world

NAT: network address translation

implementation: NAT router must (transparently):

- outgoing datagrams: replace (source IP address, port #) of every outgoing datagram to (NAT IP address, new port #)
  - remote clients/servers will respond using (NAT IP address, new port #) as destination address
- remember (in NAT translation table) every (source IP address, port #) to (NAT IP address, new port #) translation pair
- incoming datagrams: replace (NAT IP address, new port #) in destination fields of every incoming datagram with corresponding (source IP address, port #) stored in NAT table

NAT: network address translation

2: NAT router changes datagram source address from 10.0.0.1, 3345 to 138.76.29.7, 5001, updates table

NAT translation table

WAN side addr	LAN side addr
138.76.29.7, 5001	10.0.0.1, 3345
……	……

1: host 10.0.0.1 sends datagram to 128.119.40.186, 80

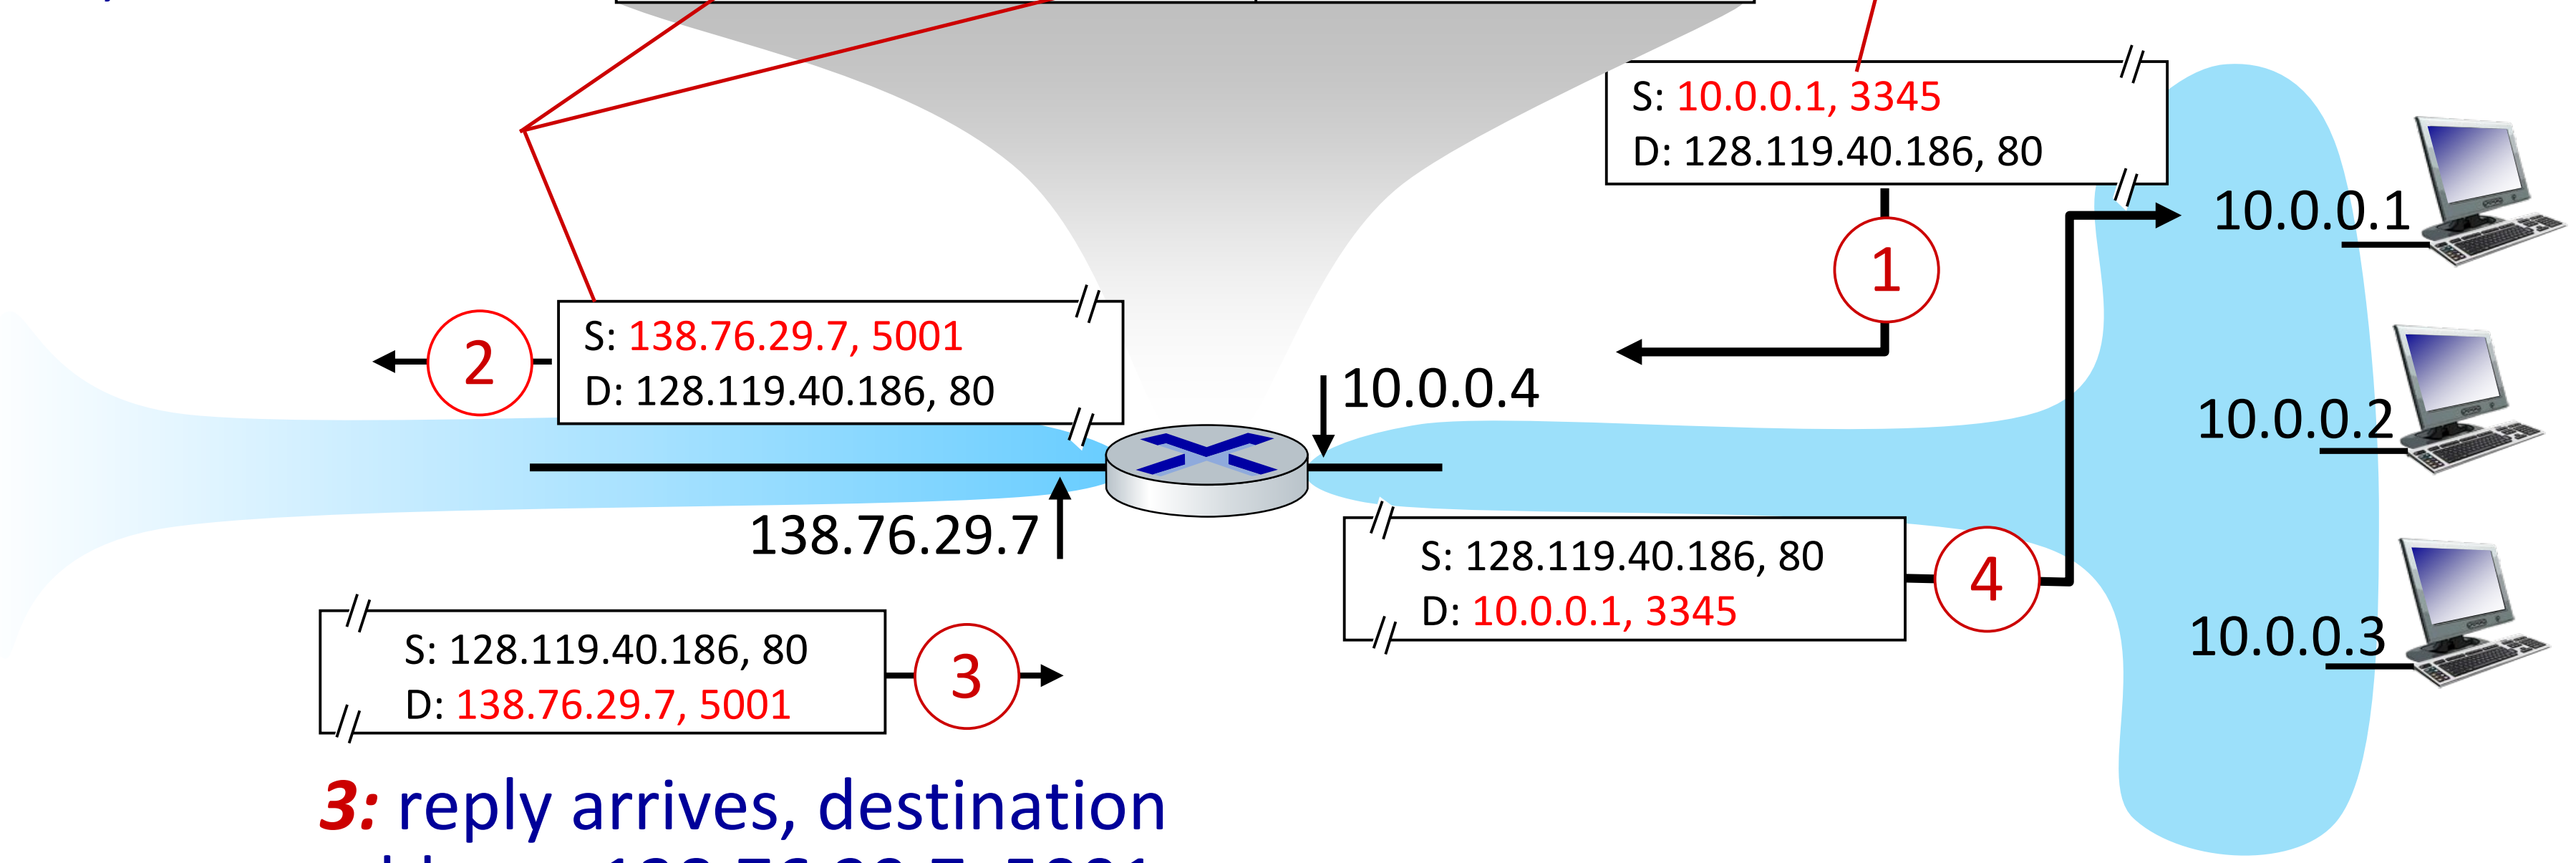

3: reply arrives, destination address: 138.76.29.7, 5001

NAT: network address translation

- NAT has been controversial:
  - routers “should” only process up to layer 3
  - violates end-to-end argument (port # manipulation by network-layer device)
  - address shortage should be solved by IPv6

- but NAT is here to stay:
  - extensively used in home and institutional nets, 4G/5G cellular networks

Network layer: “data plane” roadmap

- Network layer: overview
  - data plane
  - control plane
- What’s inside a router
  - input ports, switching, output ports
  - buffer management, scheduling
- IP: the Internet Protocol
  - datagram format
  - addressing
  - network address translation

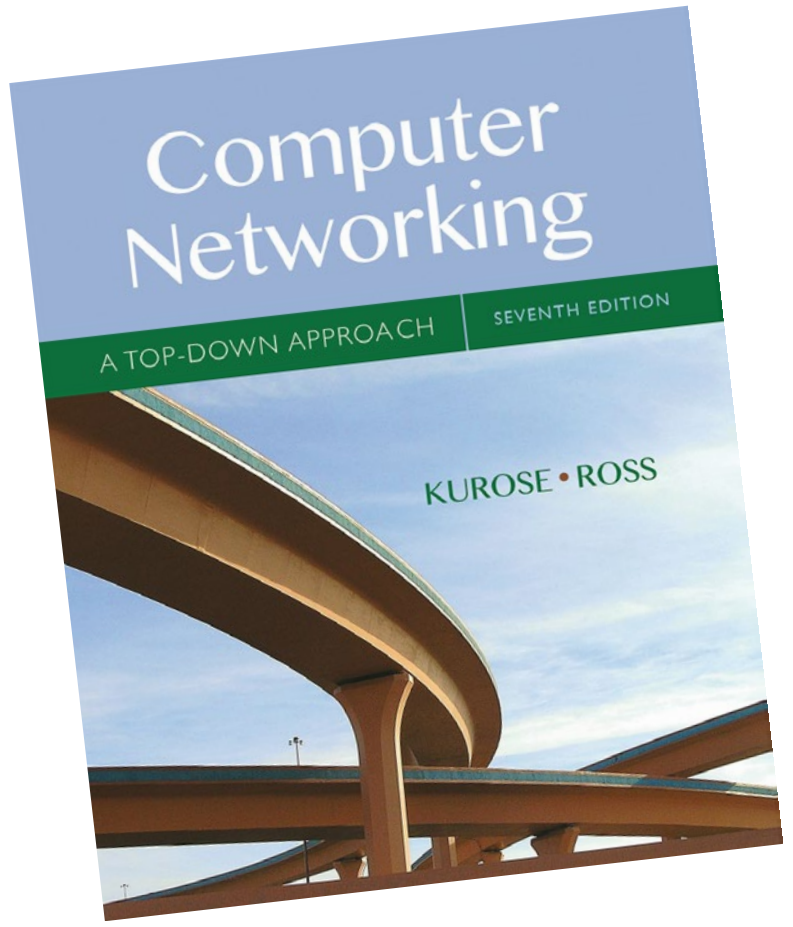

Chapter 4

- Generalized Forwarding, SDN
  - Match+action
  - OpenFlow: match+action in action

Per-router control plane (traditional one)

Individual routing algorithm components *in each and every router* interact in the control plane

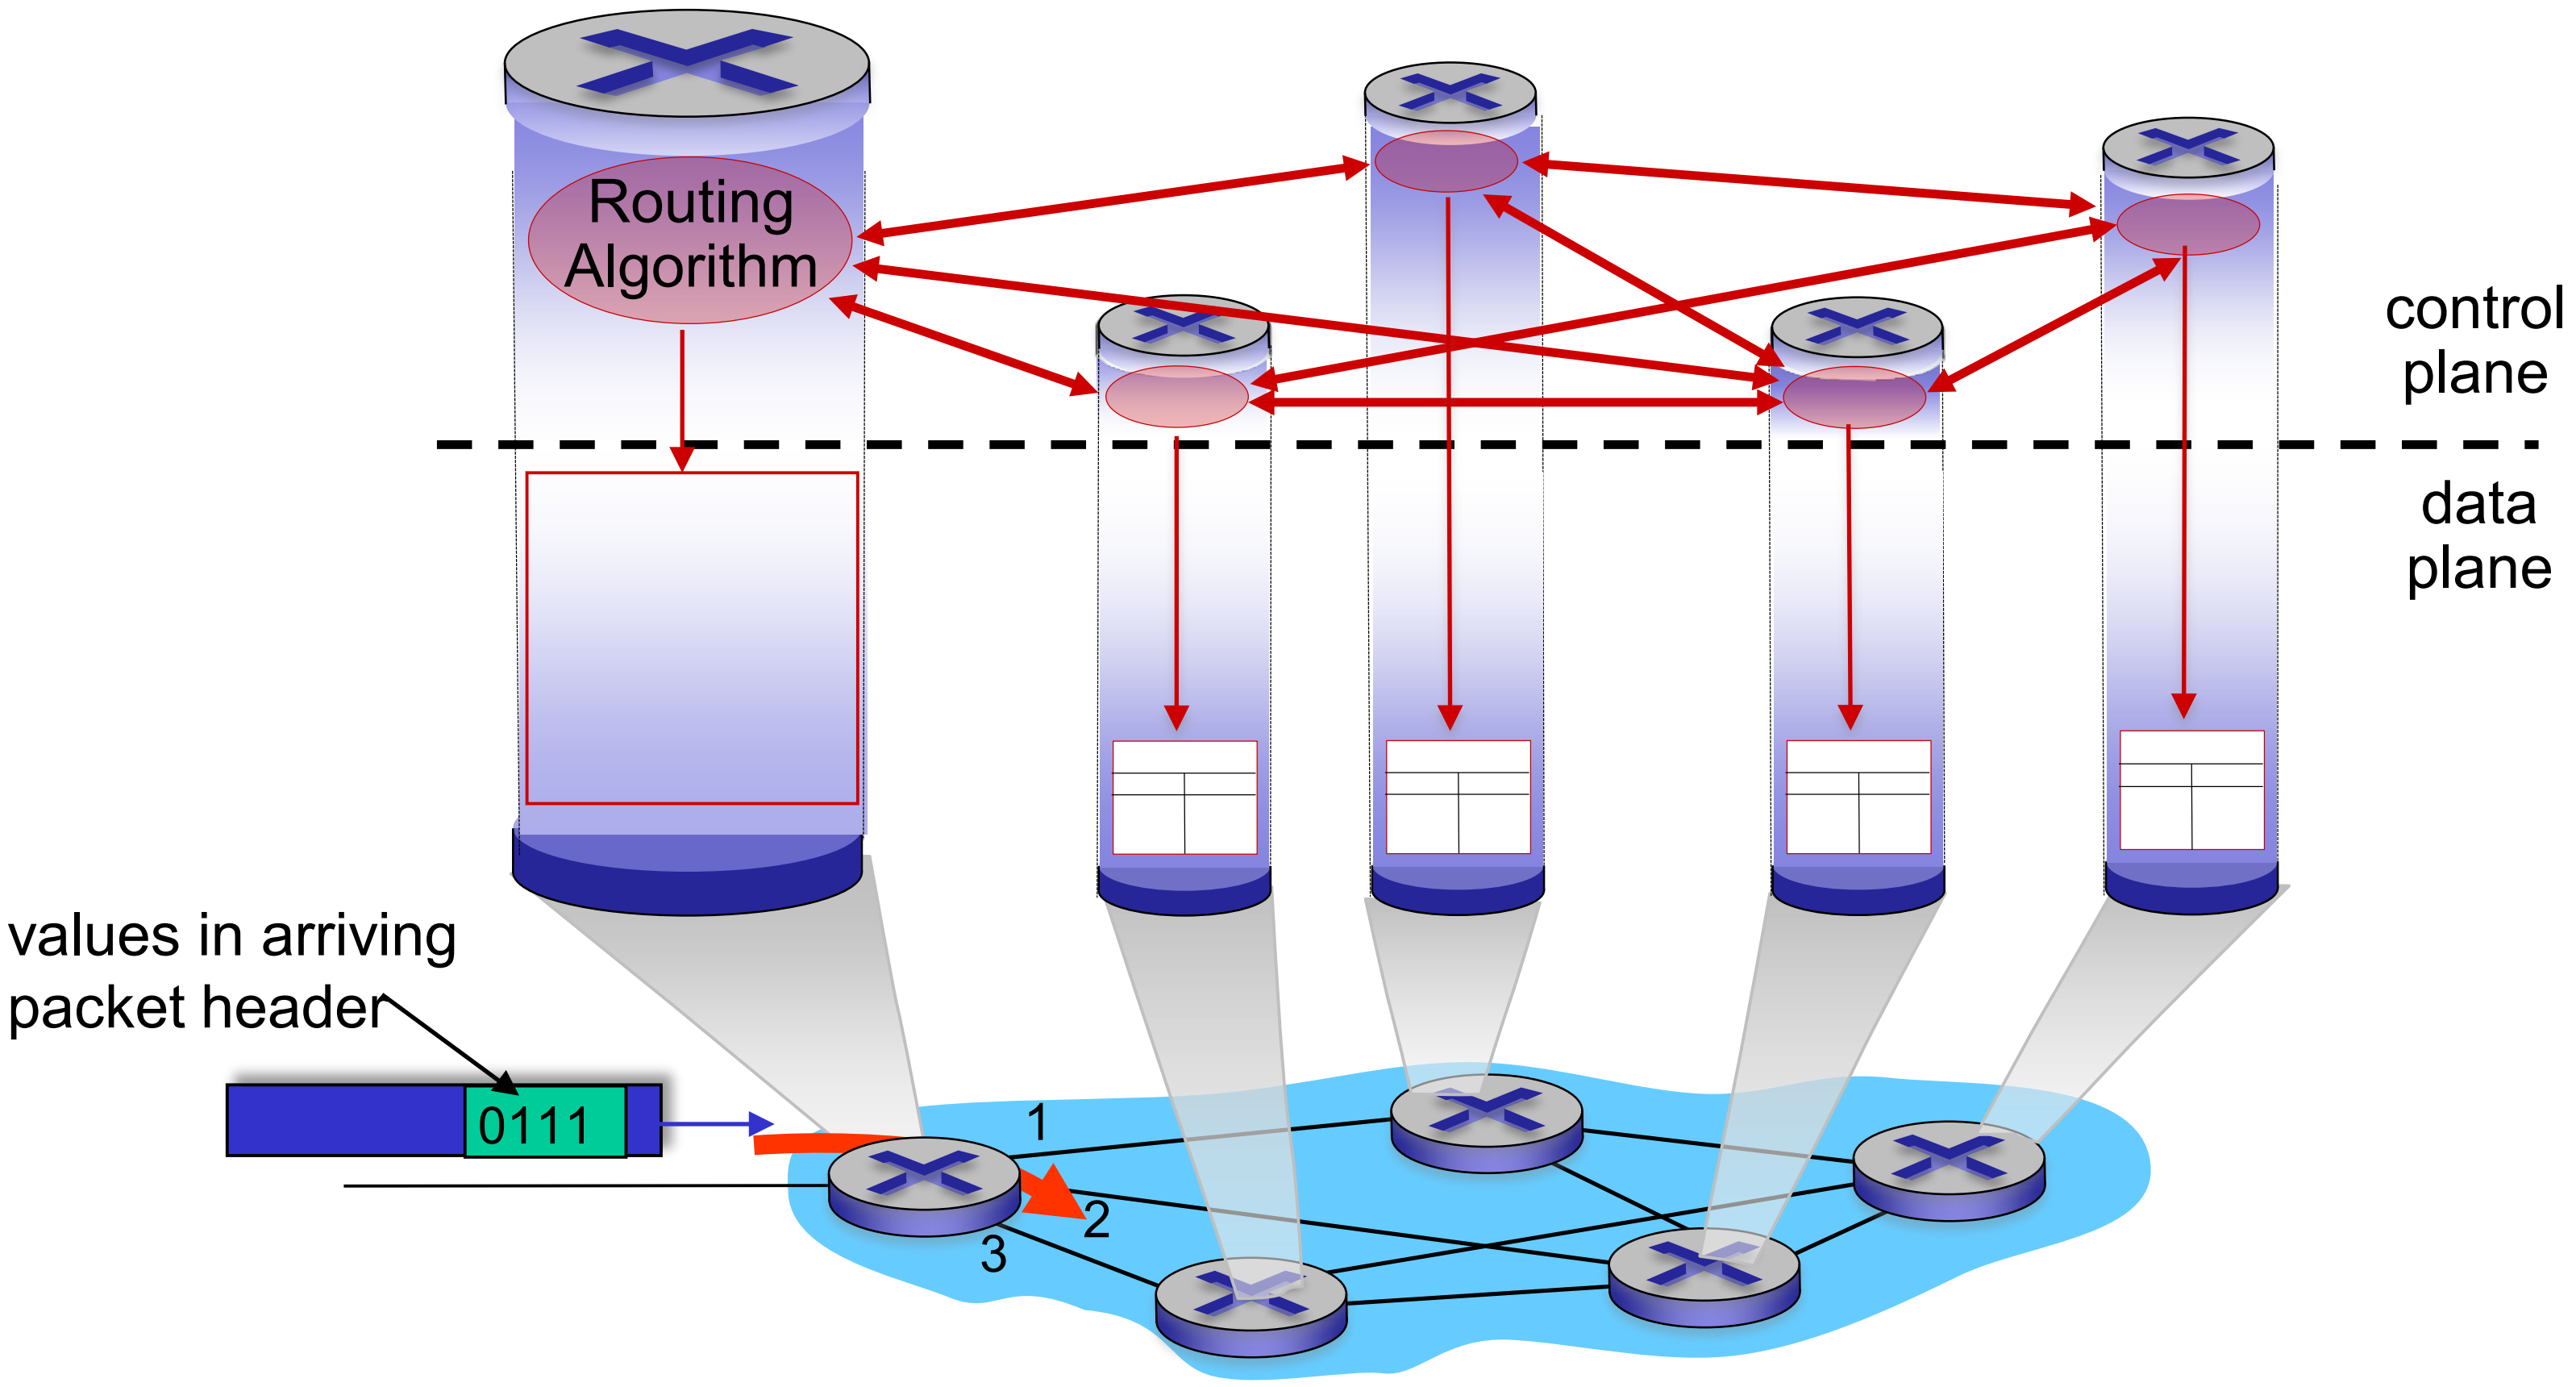

Software-Defined Networking (SDN)

Remote controller computes, installs forwarding tables in routers

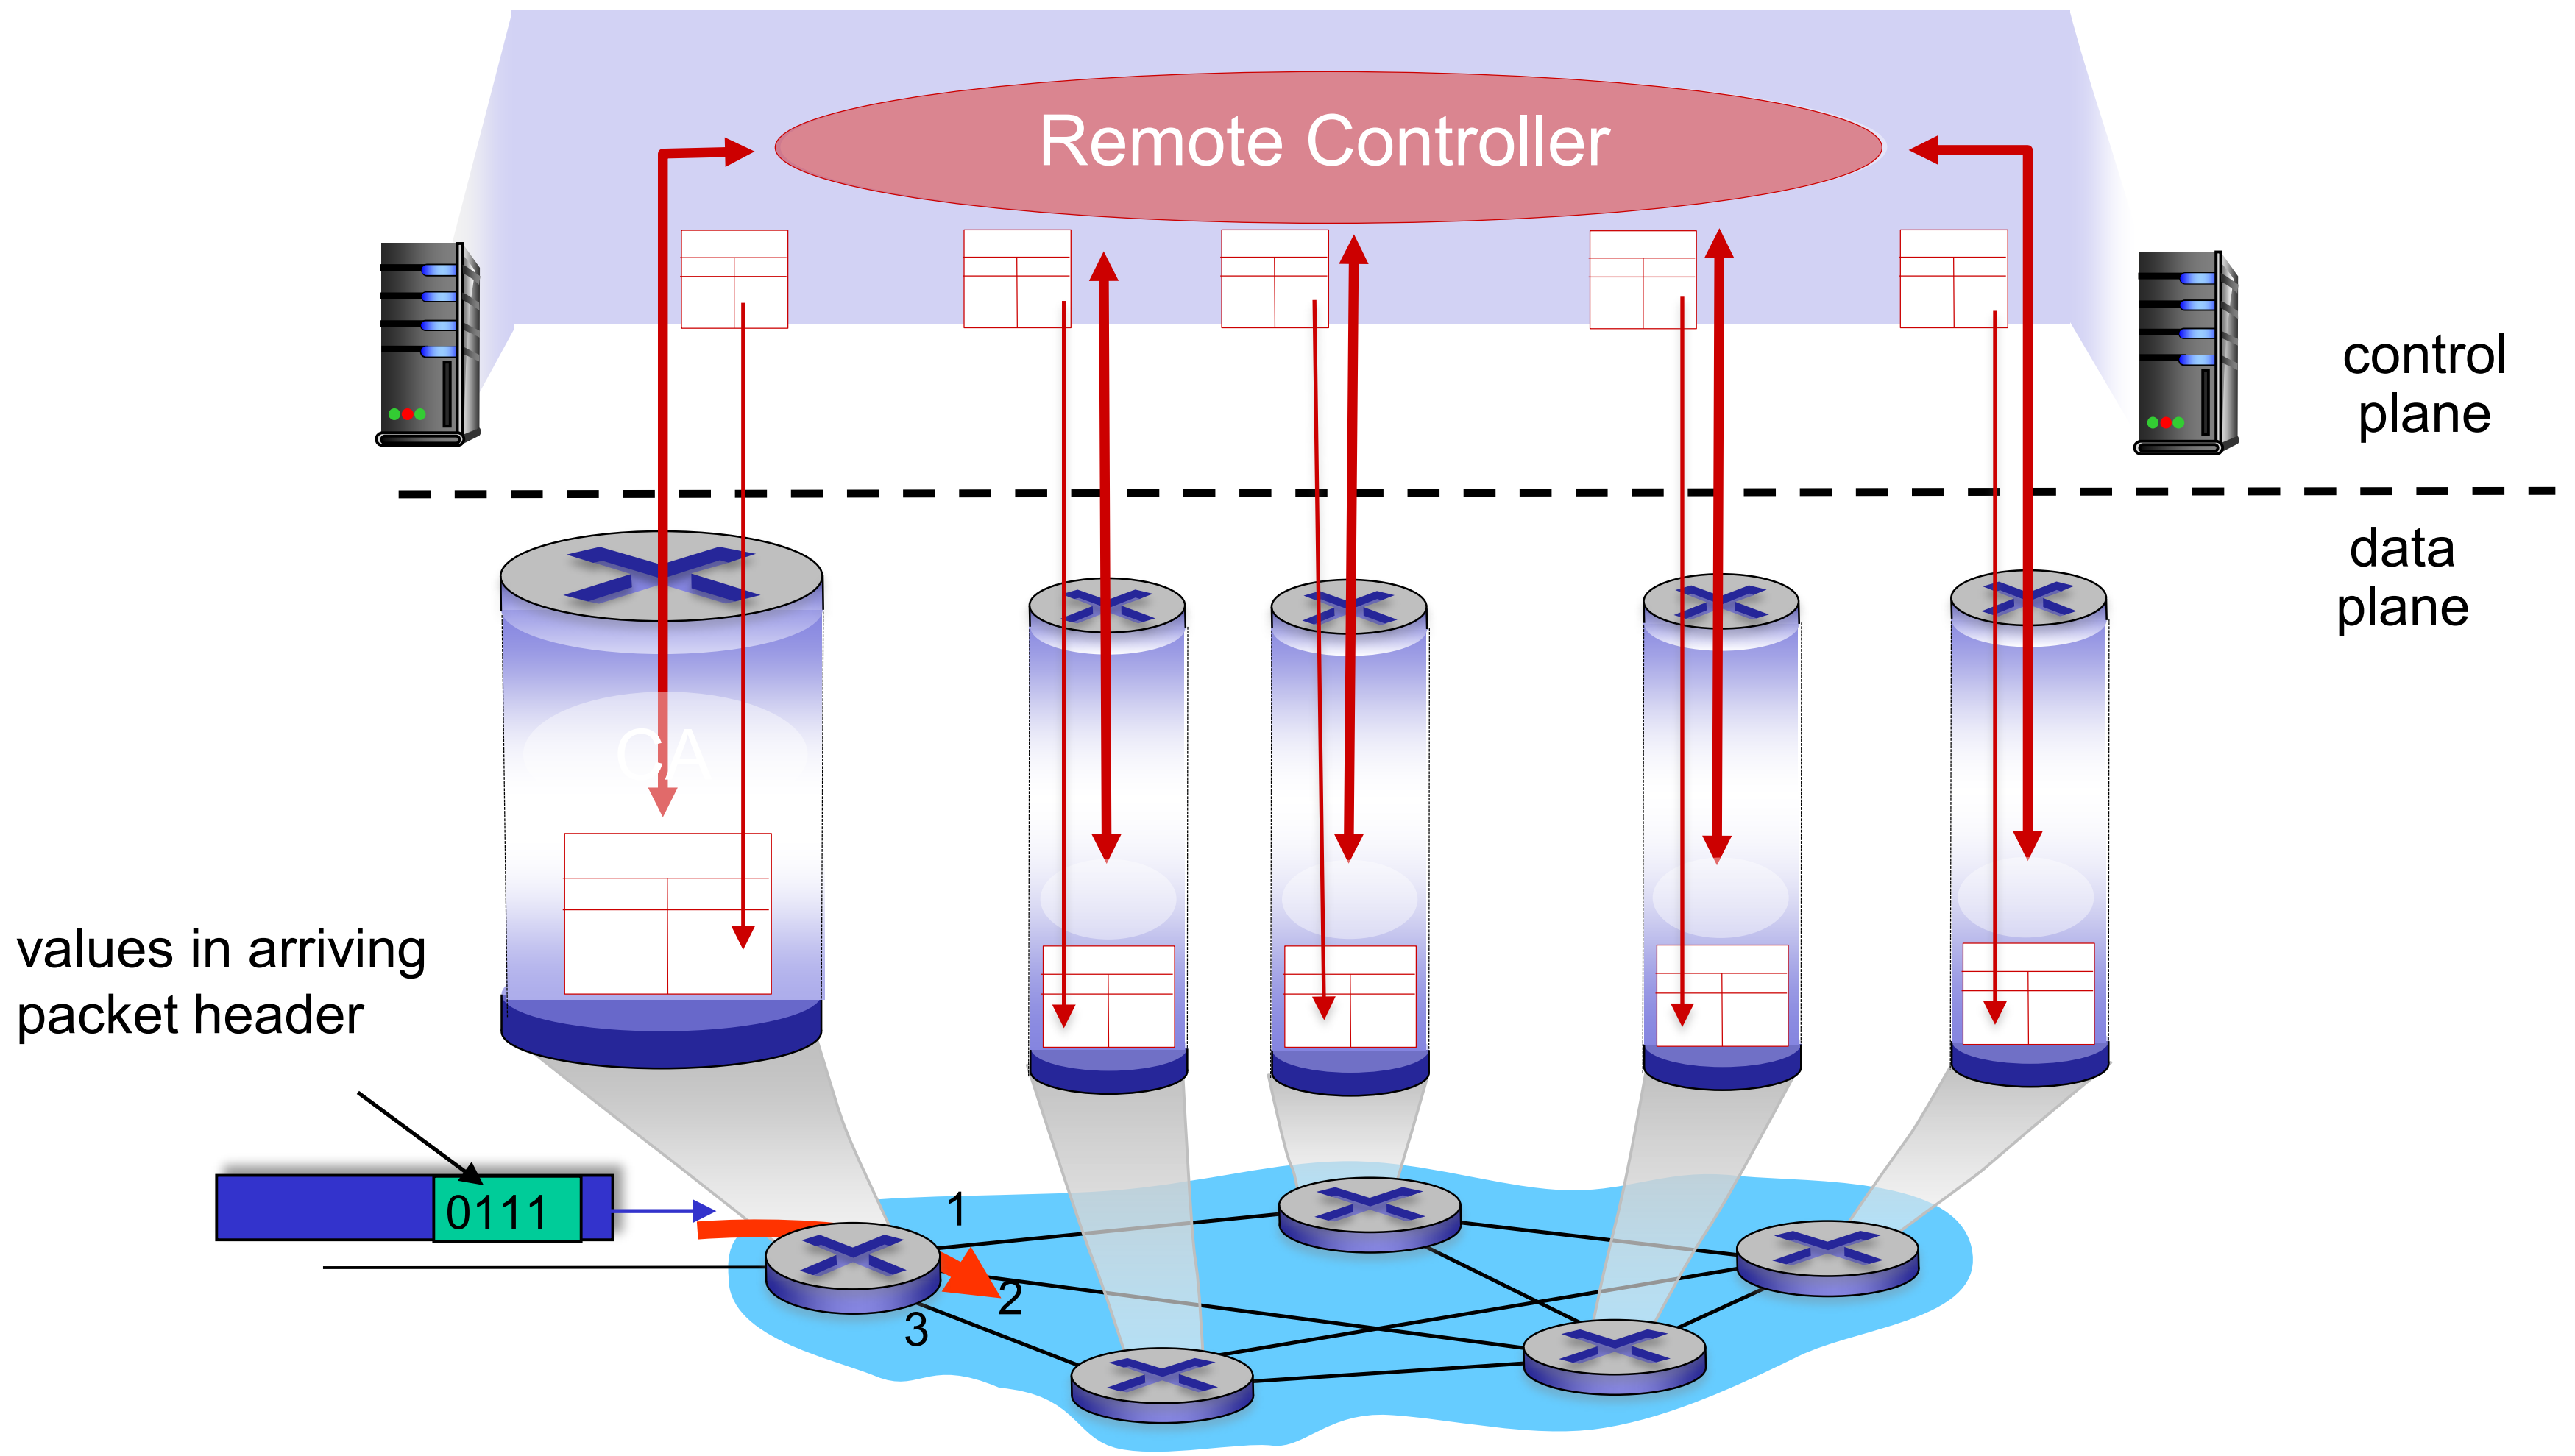

Generalized forwarding: match plus action

Review: each router contains a forwarding table (aka: **flow table**)

- "match plus action" abstraction: match bits in arriving packet, take action
  - *destination-based forwarding:* forward based on dest. IP address
  - *generalized forwarding:*
    - many header fields can determine action
    - many action possible: drop/copy/modify/log packet

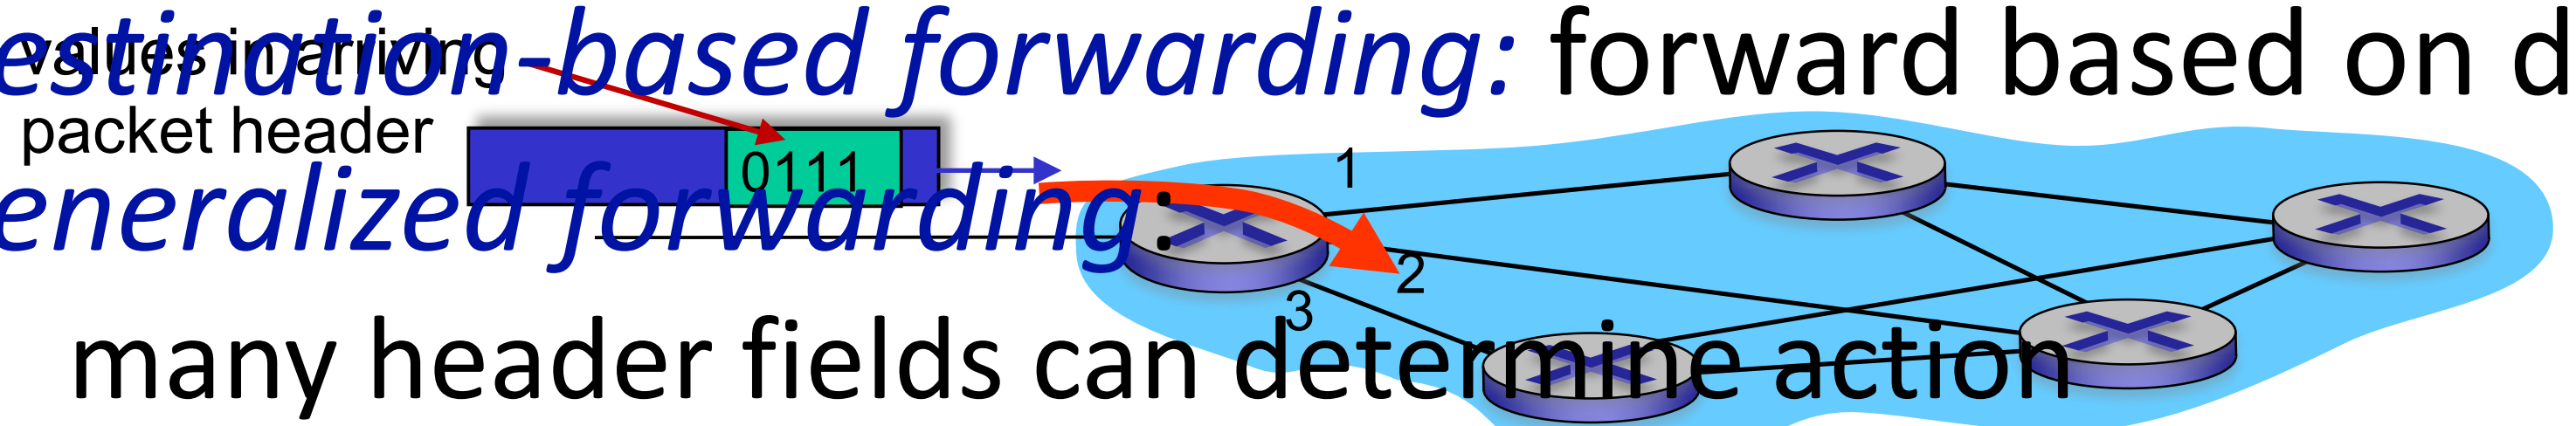

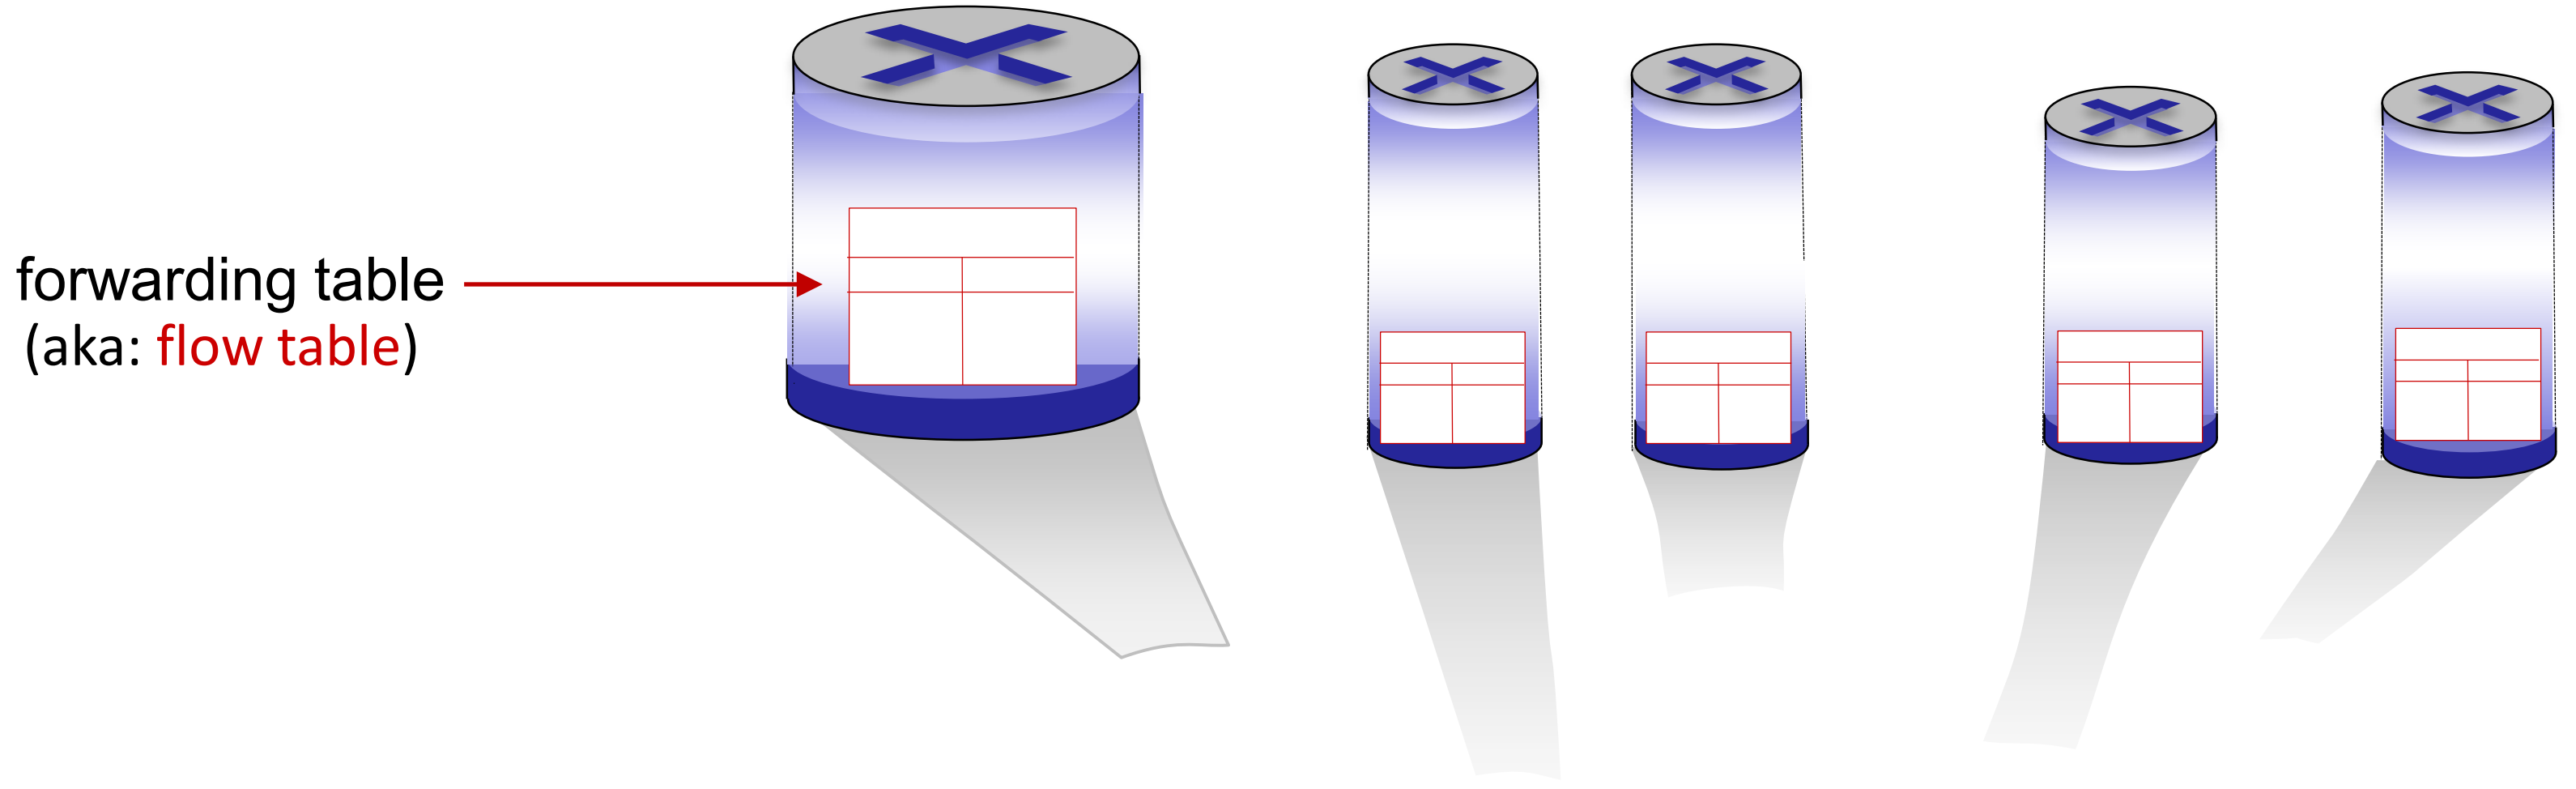

Flow table abstraction

- flow: defined by header field values (in link-, network-, transport-layer fields)
- generalized forwarding:
  - match: pattern values in packet header fields
  - actions: for matched packet: drop, forward, modify, matched packet or send matched packet to controller
  - priority: disambiguate overlapping patterns
  - counters: #bytes and #packets

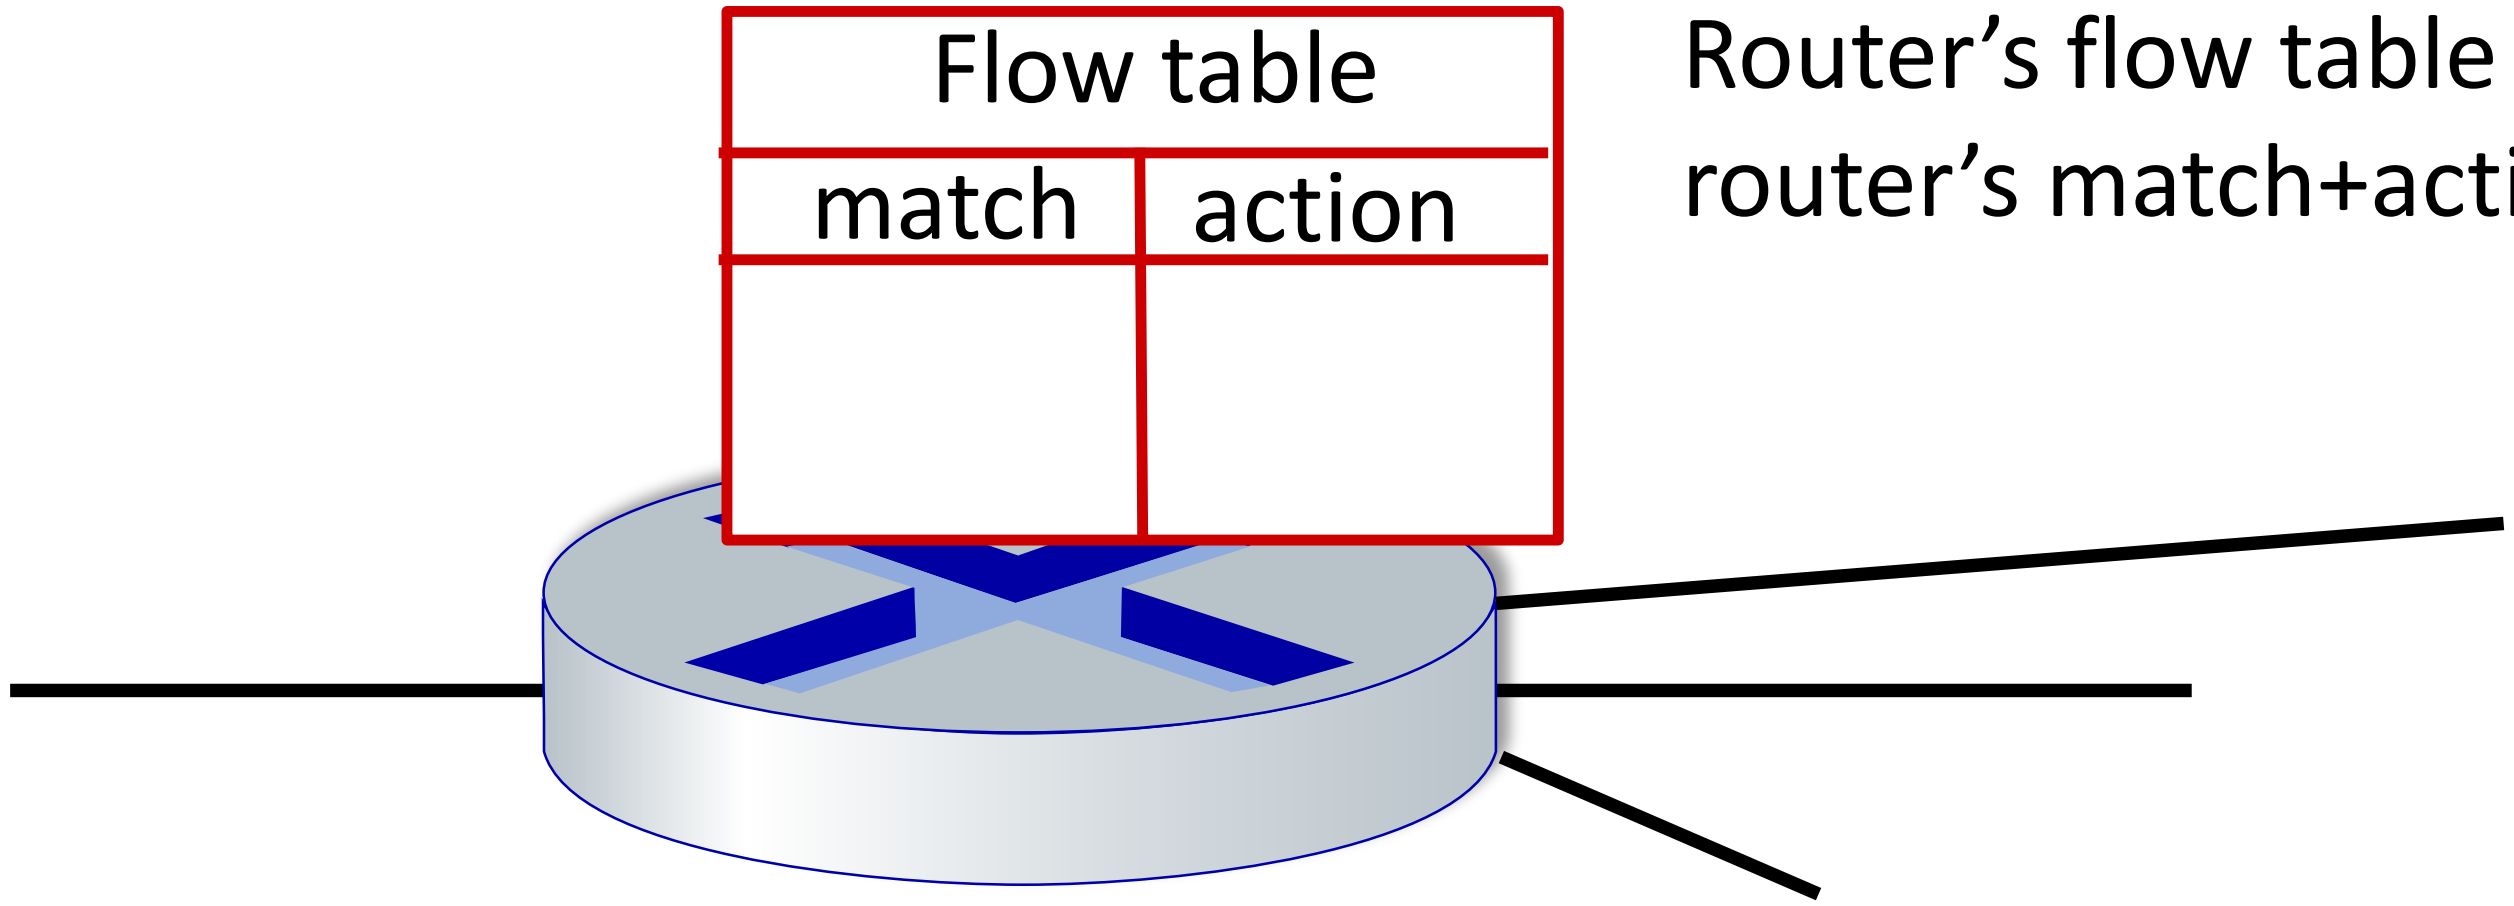

Router's flow table define router's match+action rules

Flow table abstraction

- flow: defined by header fields
- generalized forwarding: simple packet-handling rules
  - match: pattern values in packet header fields
  - actions: for matched packet: drop, forward, modify, matched packet or send matched packet to controller
  - priority: disambiguate overlapping patterns
  - counters: #bytes and #packets

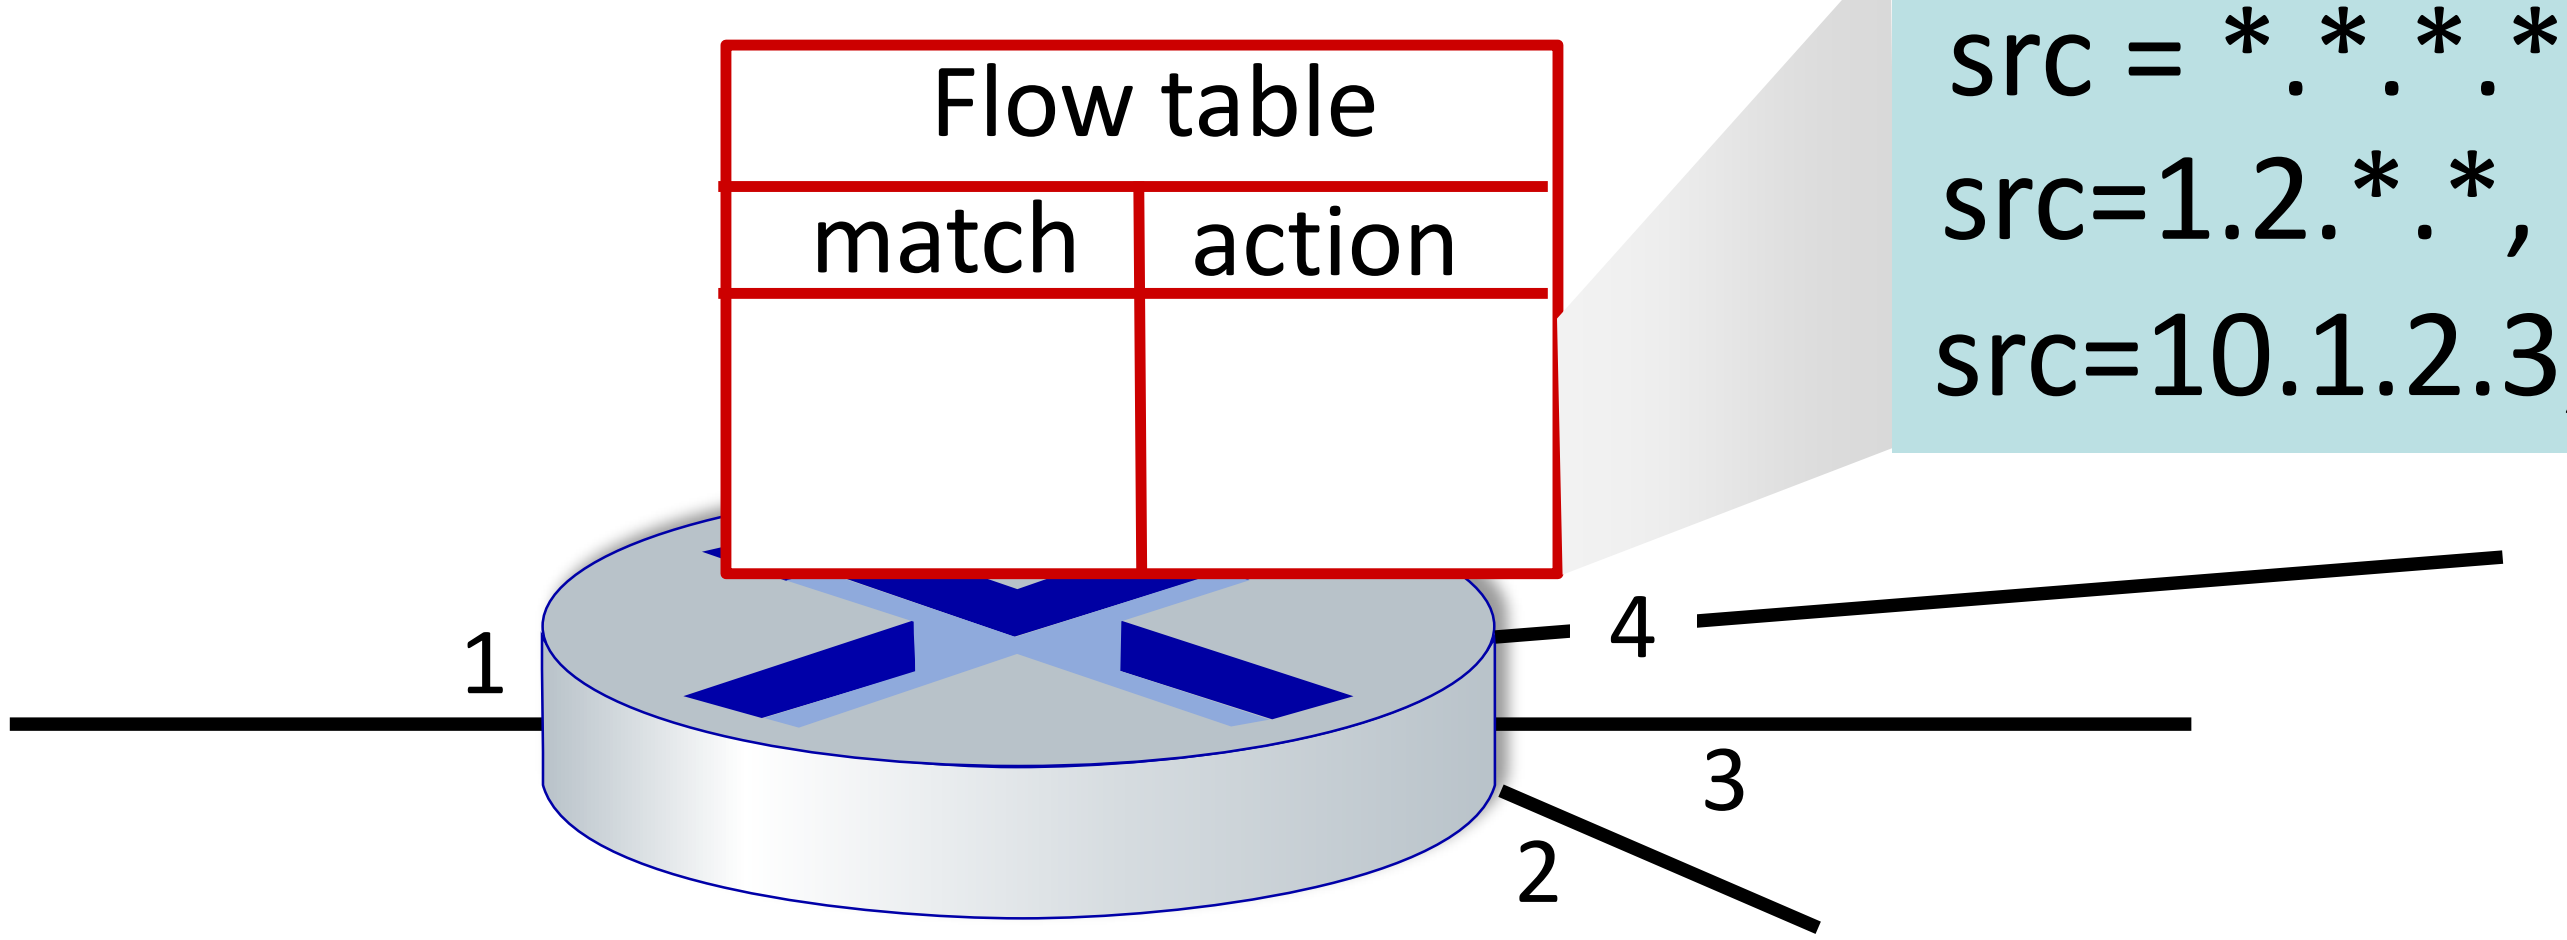

match	action
src = *.*.*.*, dest=3.4.*.*	forward(2)
src=1.2.*.*, dest=*.*.*.*	drop
src=10.1.2.3, dest=*.*.*.*	send to controller

* : wildcard

OpenFlow: flow table entries

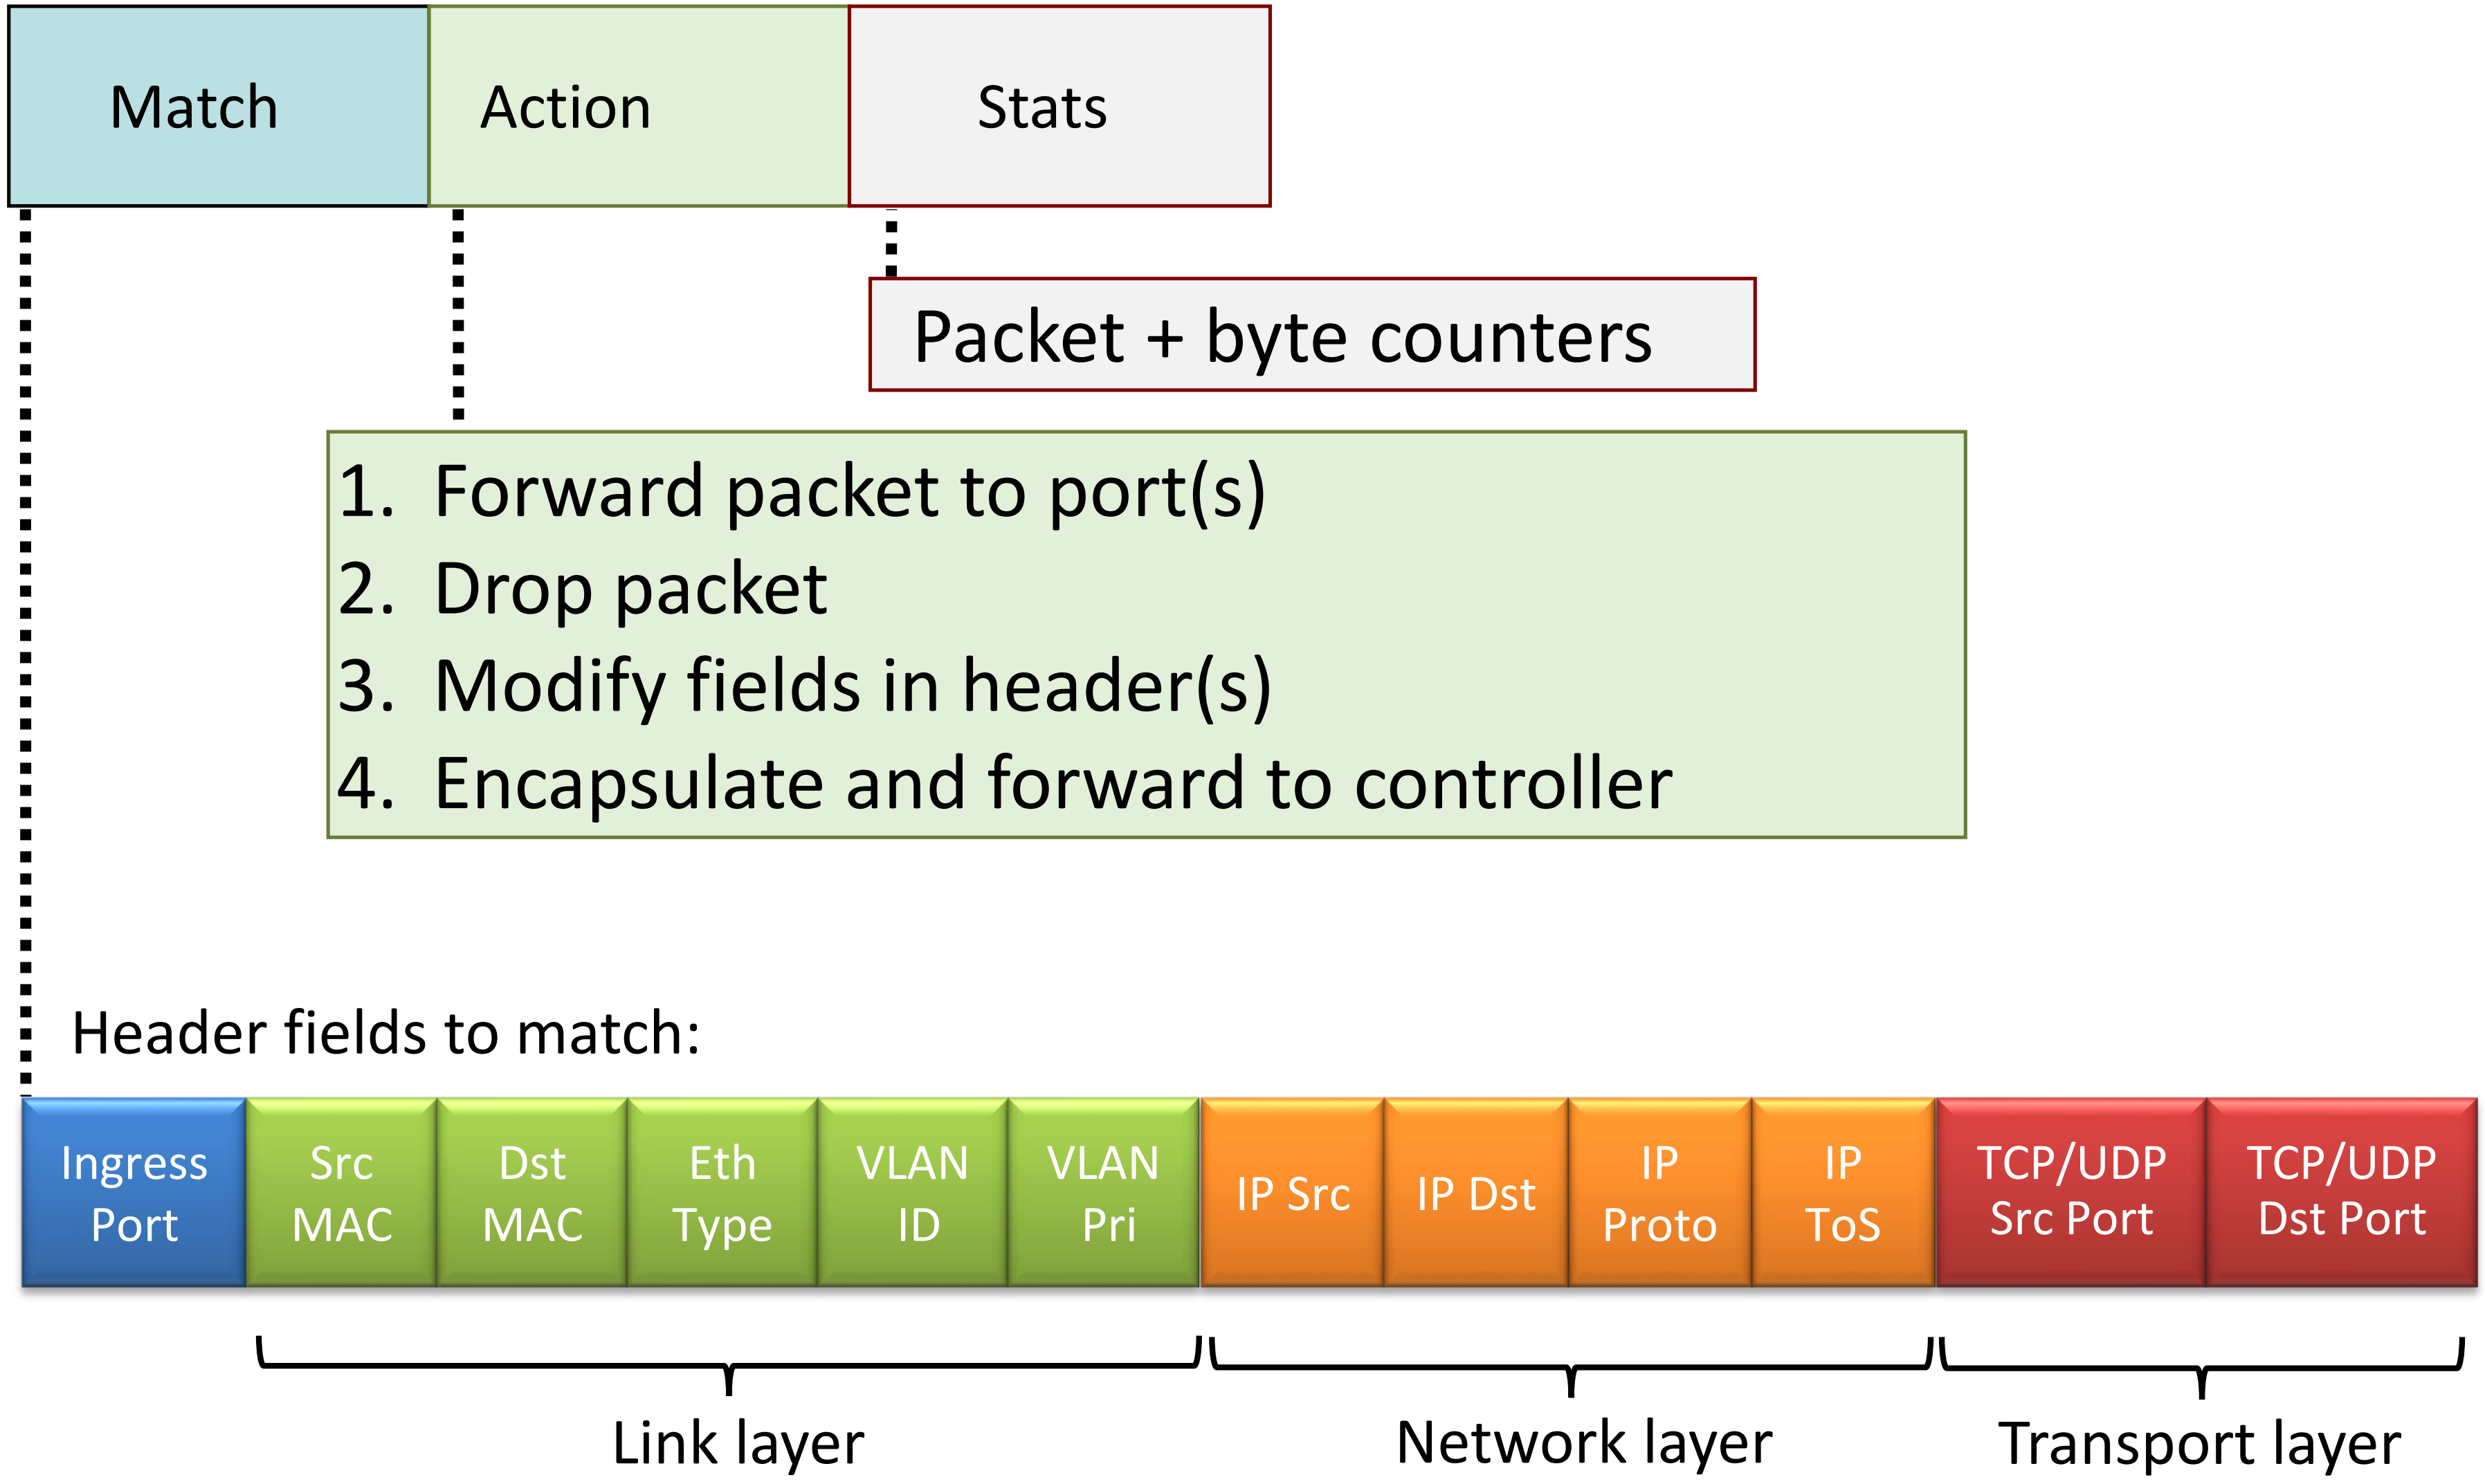

OpenFlow: examples

Destination-based forwarding:

Switch Port	MAC src	MAC dst	Eth type	VLAN ID	VLAN Pri	IP Src	IP Dst	IP Prot	IP ToS	TCP s-port	TCP d-port	Action
*	*	*	*	*	*	*	51.6.0.8	*	*	*	*	port6

IP datagrams destined to IP address 51.6.0.8 should be forwarded to router output port 6

Firewall:

Switch Port	MAC src	MAC dst	Eth type	VLAN ID	VLAN Pri	IP Src	IP Dst	IP Prot	IP ToS	TCP s-port	TCP d-port	Action
*	*	*	*	*	*	*	*	*	*	*	22	drop

Block (do not forward) all datagrams destined to TCP port 22 (ssh port #)

Switch Port	MAC src	MAC dst	Eth type	VLAN ID	VLAN Pri	IP Src	IP Dst	IP Prot	IP ToS	TCP s-port	TCP d-port	Action
*	*	*	*	*	*	128.119.1.1	*	*	*	*	*	drop

Block (do not forward) all datagrams sent by host 128.119.1.1

OpenFlow: examples

Layer 2 destination-based forwarding:

Switch Port	MAC src	MAC dst	Eth type	VLAN ID	VLAN Pri	IP Src	IP Dst	IP Prot	IP ToS	TCP s-port	TCP d-port	Action
*	*	22:A7:23:11:E1:02	*	*	*	*	*	*	*	*	*	port3

layer 2 frames with destination MAC address 22:A7:23:11:E1:02 should be forwarded to output port 3

OpenFlow abstraction

- match+action: abstraction unifies different kinds of devices

Router
- *match:* longest destination IP prefix
- *action:* forward out a link

Switch
- *match:* destination MAC address
- *action:* forward or flood

Firewall
- *match*: IP addresses and TCP/UDP port numbers
- *action:* permit or deny

NAT
- *match:* IP address and port
- *action:* rewrite address and port

OpenFlow example

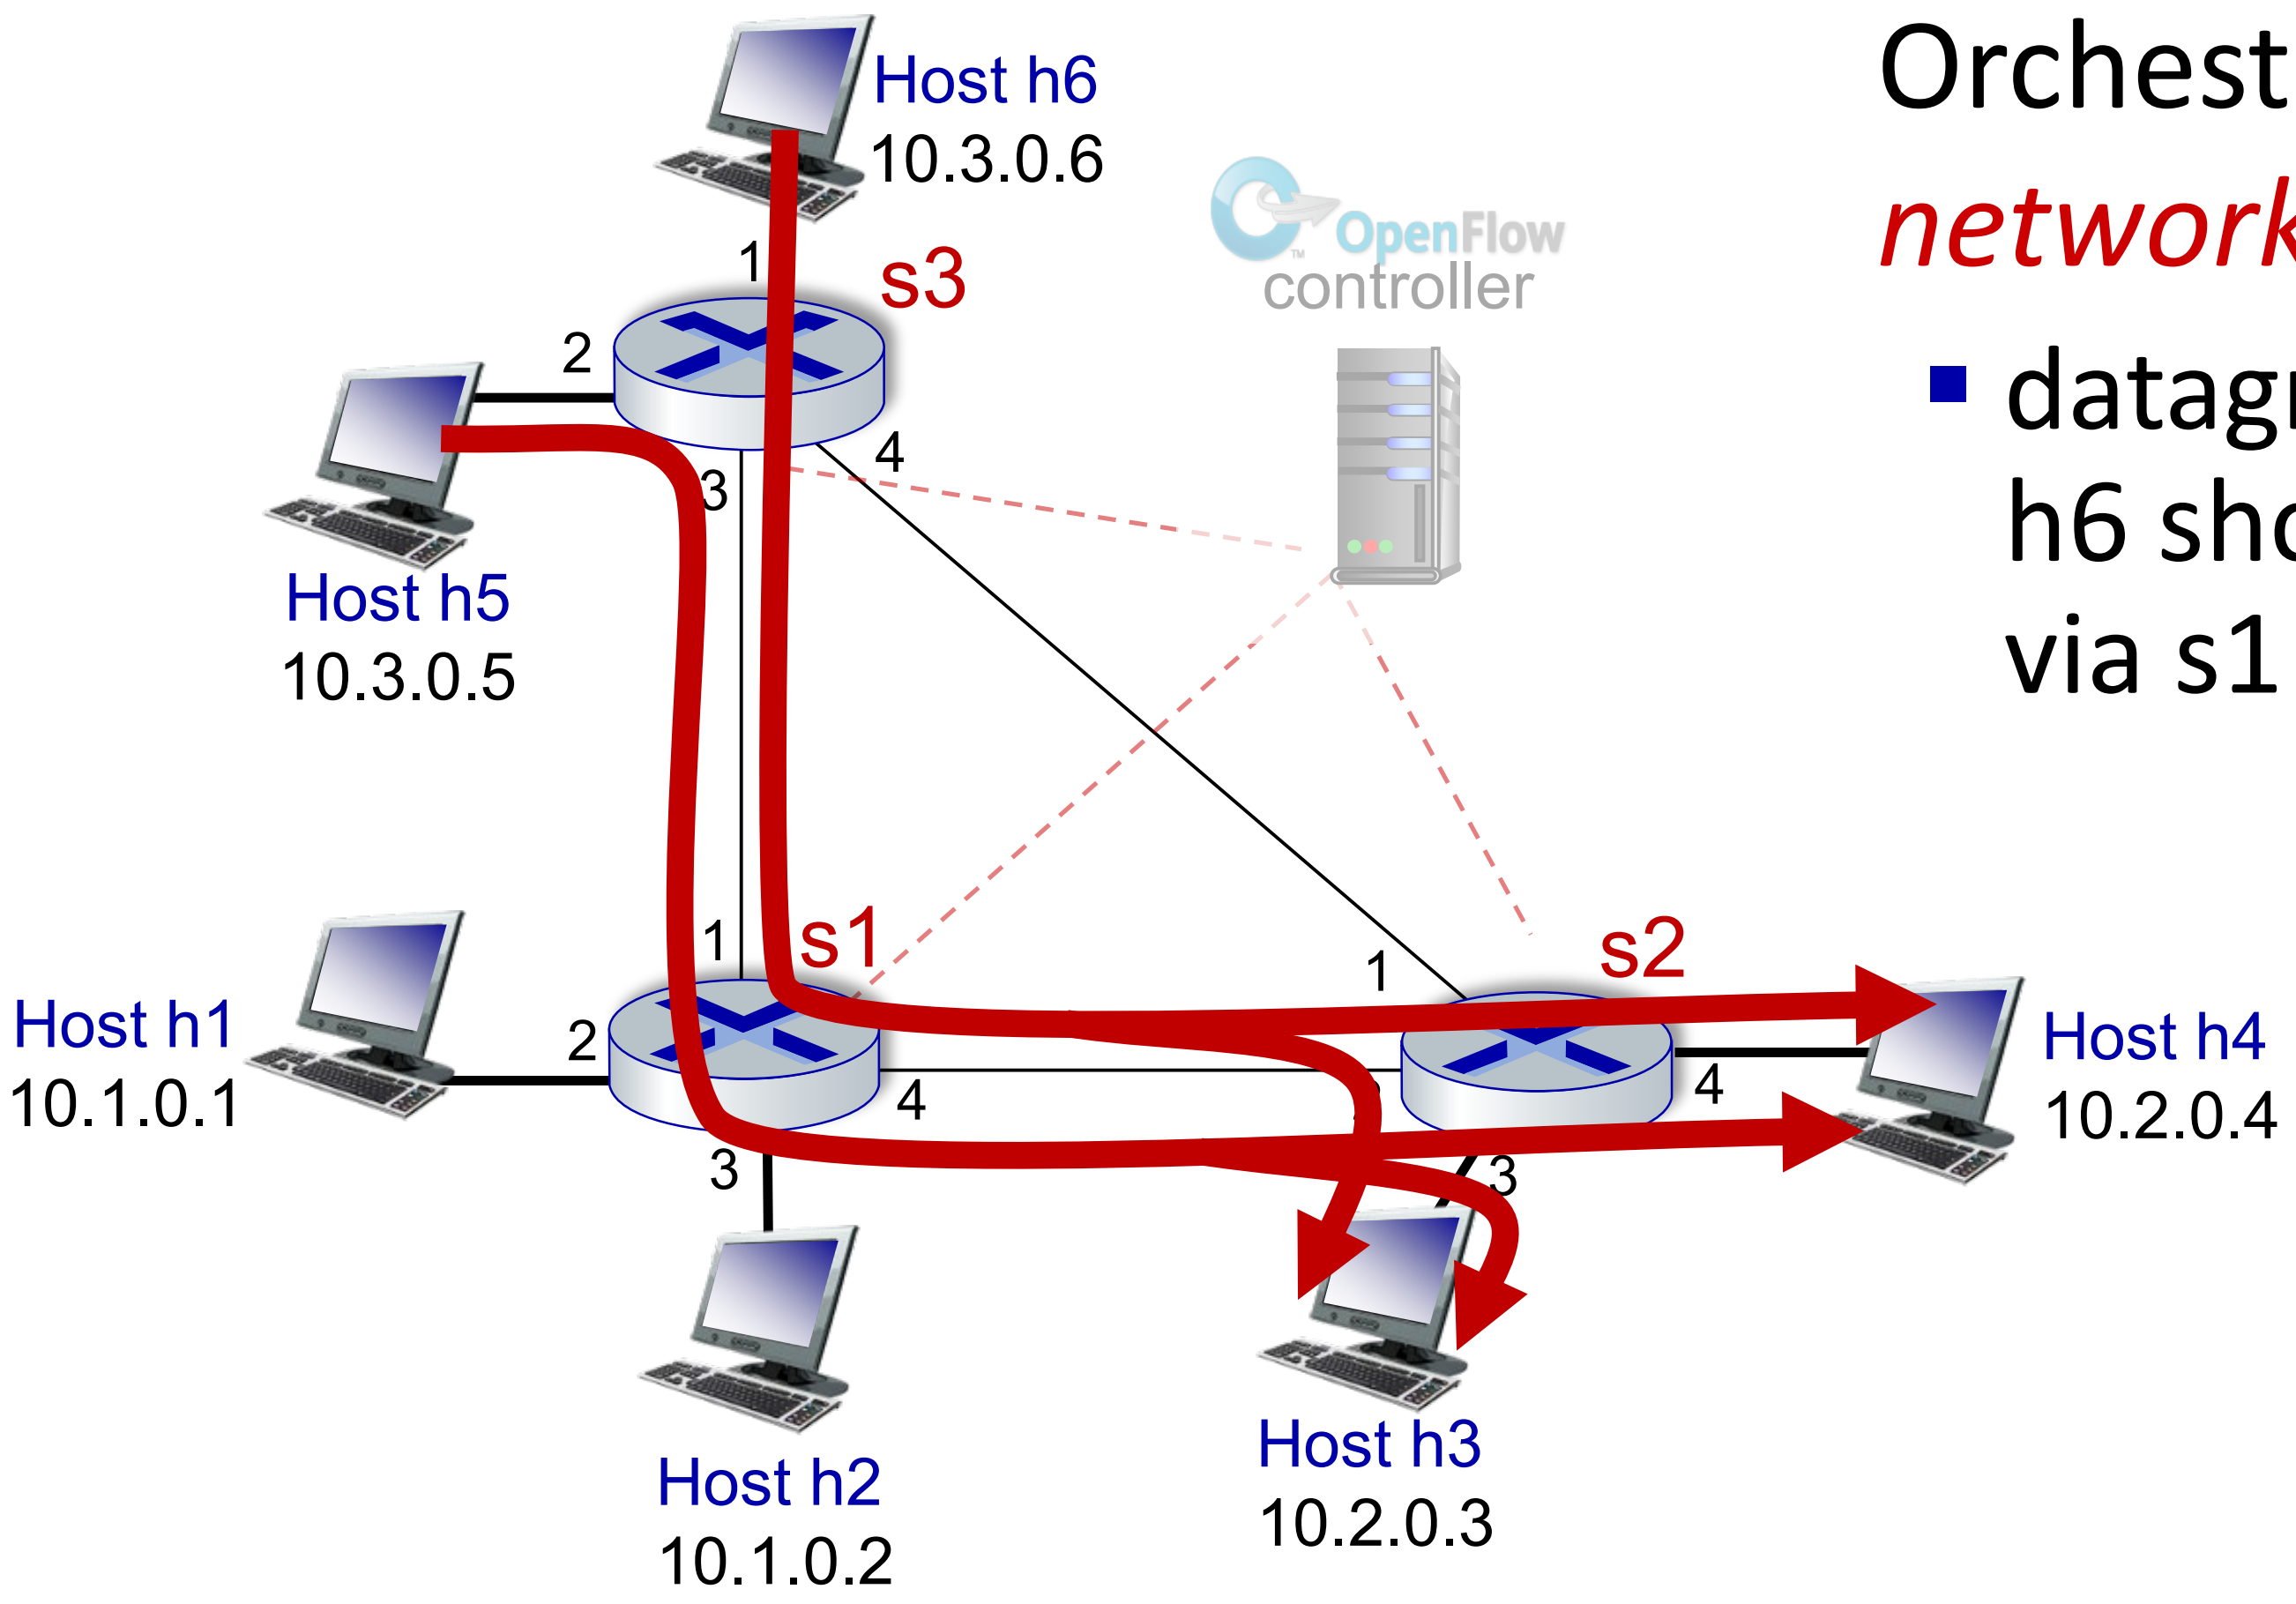

Orchestrated tables can create *network-wide* behavior, e.g.,:

- datagrams from hosts h5 and h6 should be sent to h3 or h4, via s1 and from there to s2

OpenFlow example

match	action
IP Src = 10.3.*.* IP Dst = 10.2.*.*	forward(3)

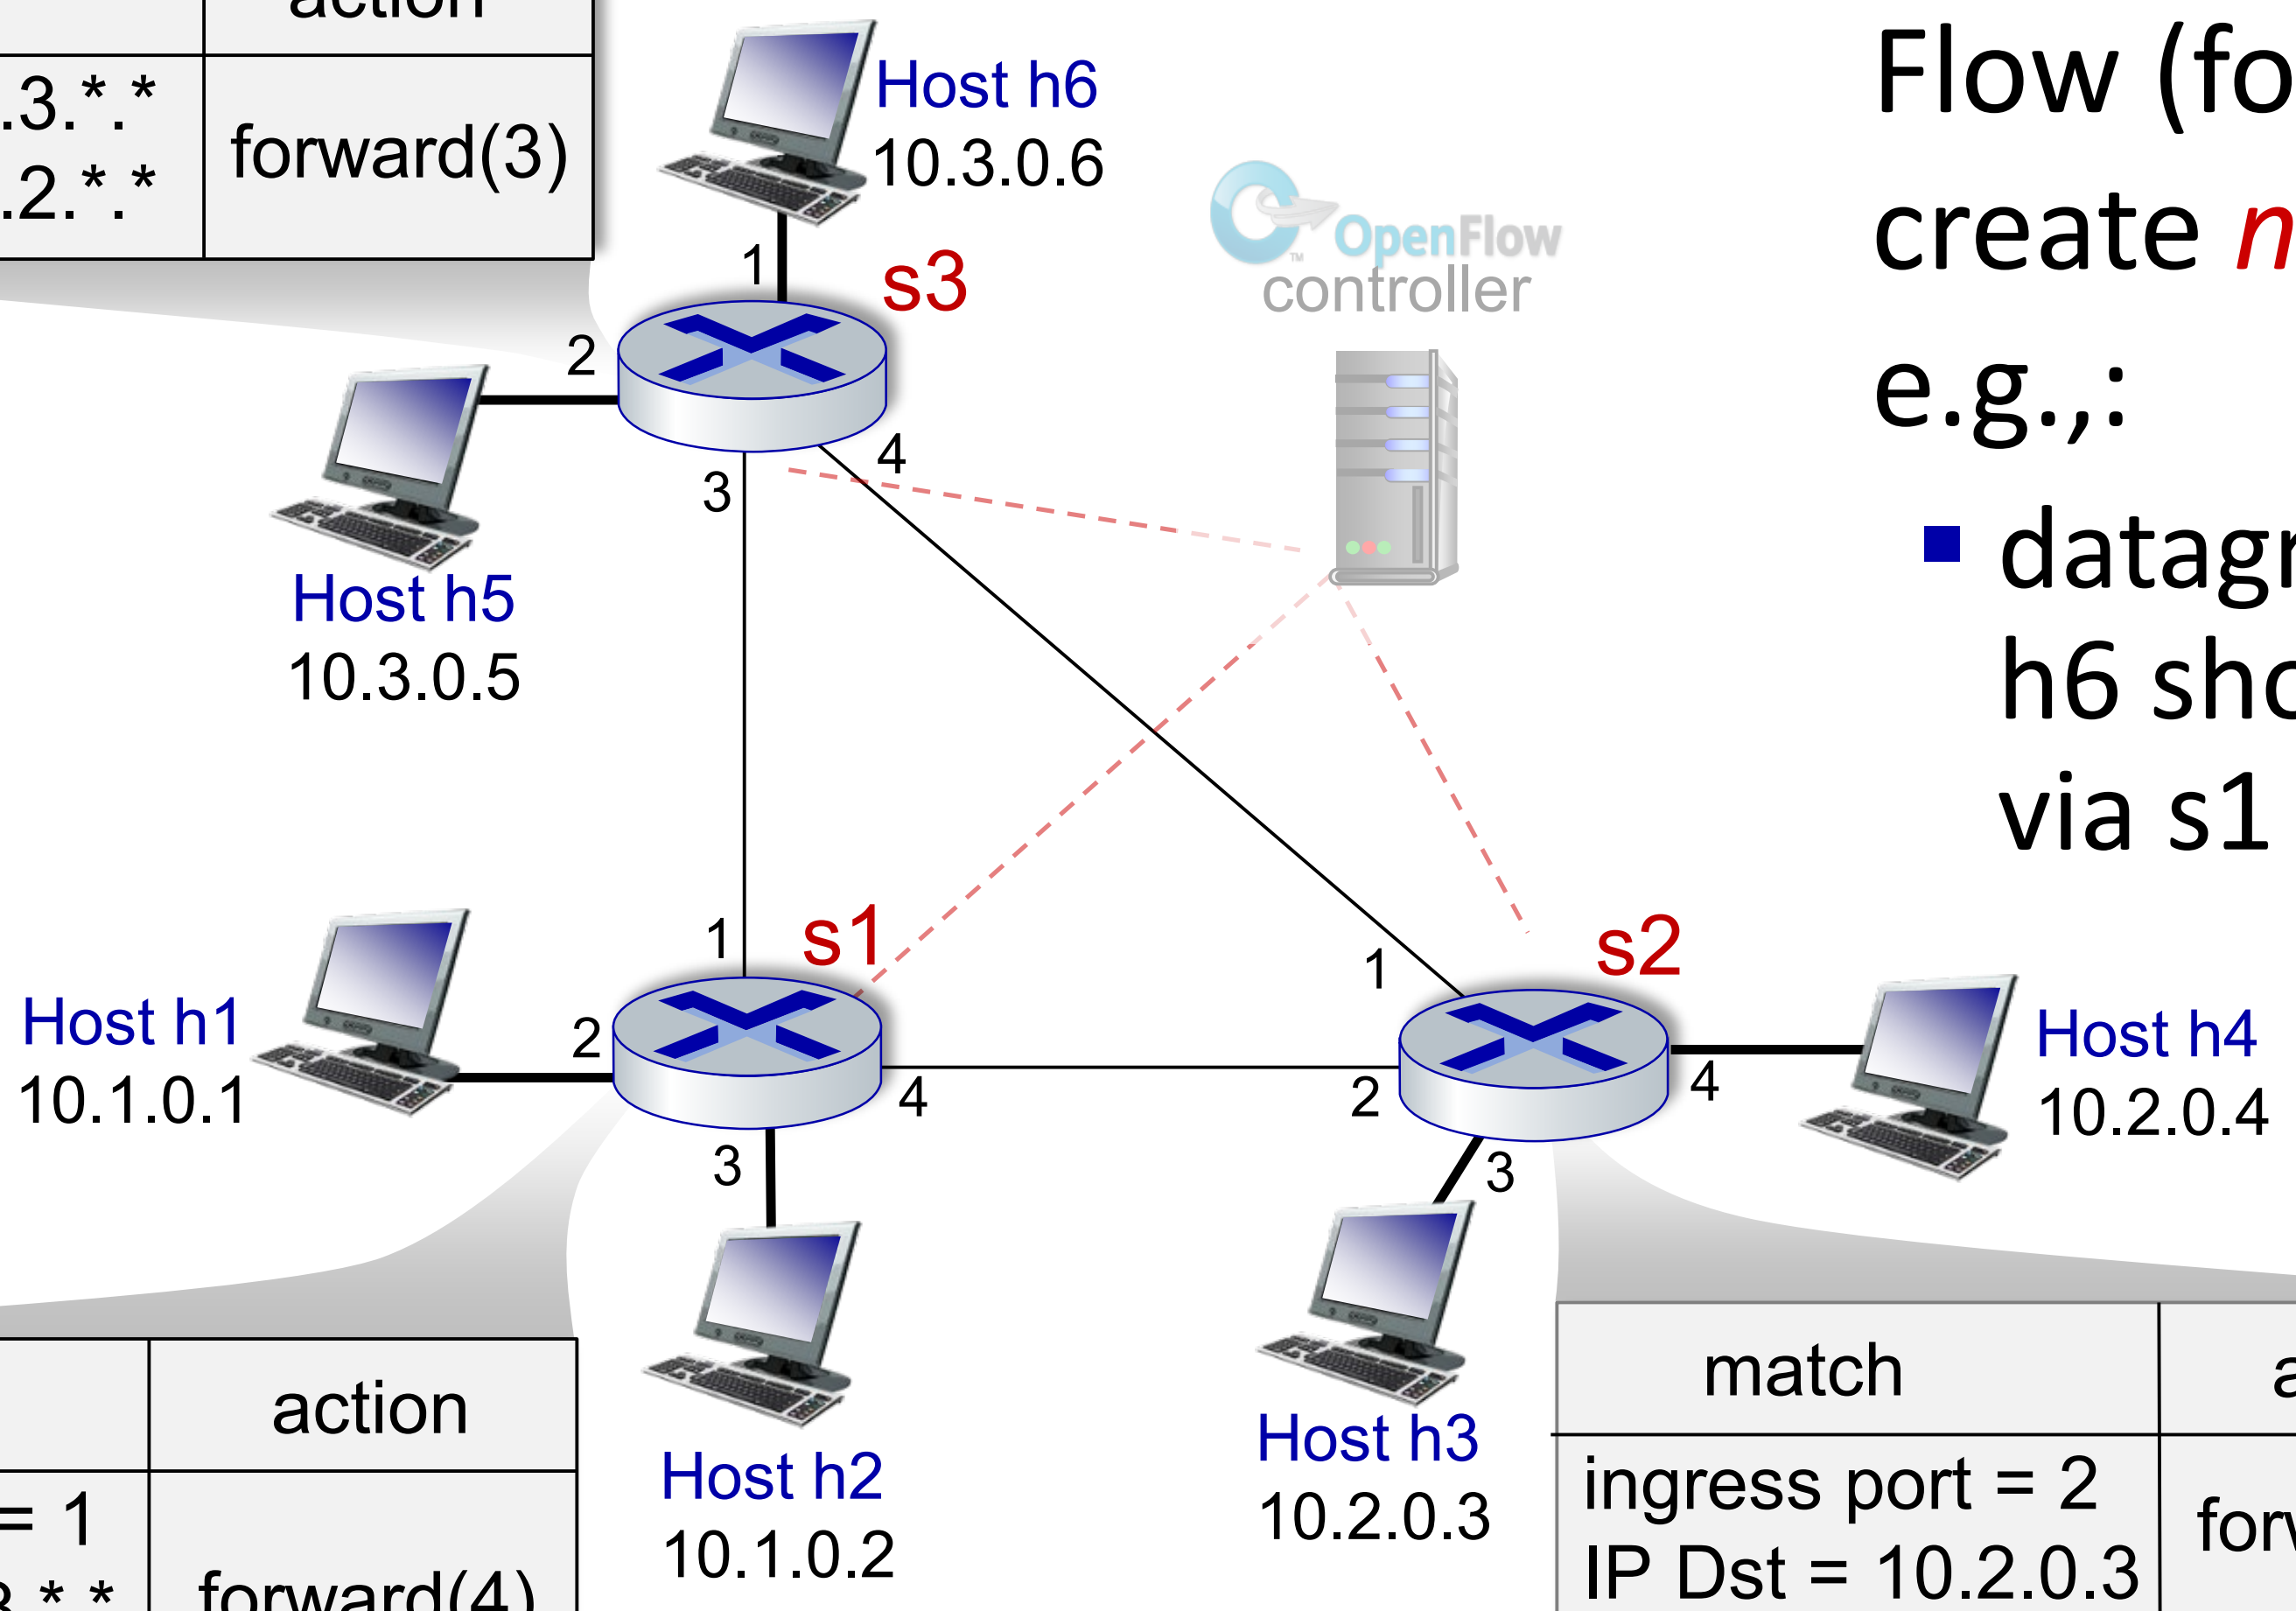

match	action
ingress port = 1 IP Src = 10.3.*.* IP Dst = 10.2.*.*	forward(4)

match	action
ingress port = 2 IP Dst = 10.2.0.3	forward(3)
ingress port = 2 IP Dst = 10.2.0.4	forward(4)

Flow (forwarding) tables can create *network-wide* behavior, e.g.,:

- datagrams from hosts h5 and h6 should be sent to h3 or h4, via s1 and from there to s2

Network Layer (Data Plane): done!

- Network layer: overview
- What's inside a router
- IP: the Internet Protocol
- Generalized Forwarding, SDN

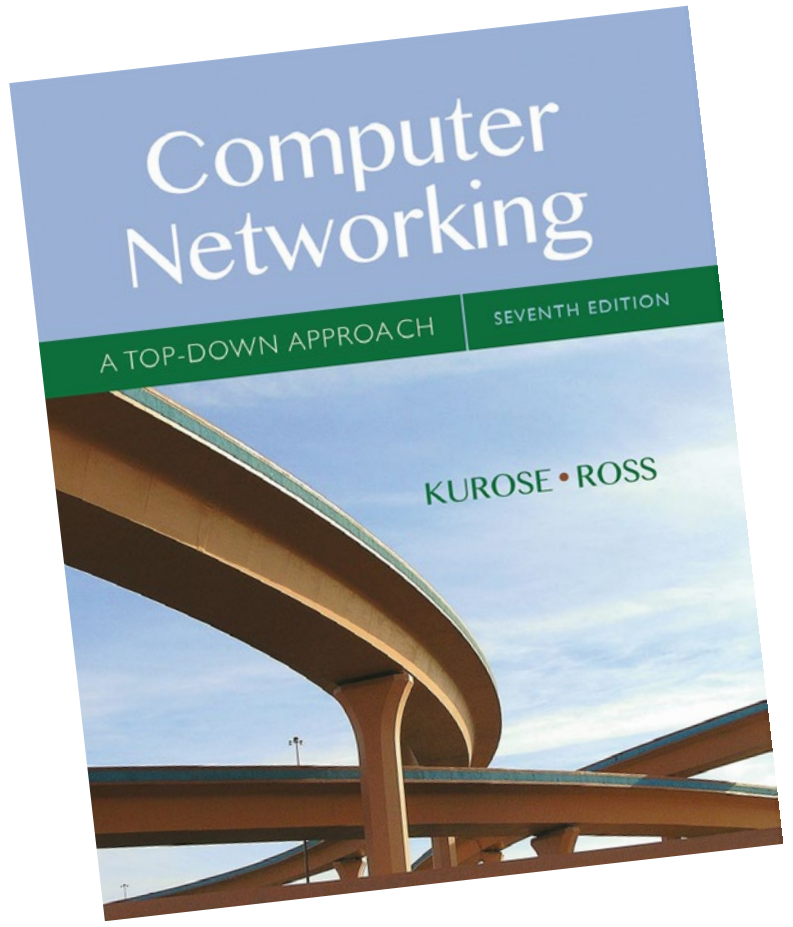

Chapter 4

Question: how are forwarding tables (destination-based forwarding) or flow tables (generalized forwarding) computed?

Answer: by the control plane