
Engineering Battery Test Report

Source: 0a5d90b5-0ee5-4a74-8a2b-0390cedb4ae7.csv | 2026-10-28 09:00 to 2026-10-28 17:19

Metric	Result
Duration (h)	8.33
Samples	30000
Charge energy (kWh)	14.95
Discharge energy (kWh)	0.00
Round-trip efficiency (%)	0.00
Voltage min / avg / max (V)	51.50 / 52.00 / 52.50
Current min / max (A)	-39.00 / -30.00
Peak charge / discharge (kW)	2.05 / 0.00
SOC start / end (%)	10.0 / 36.7
Test assessment	FAIL
Maximum voltage limit (V)	50.00
Maximum absolute current limit (A)	25.00

Voltage (V)

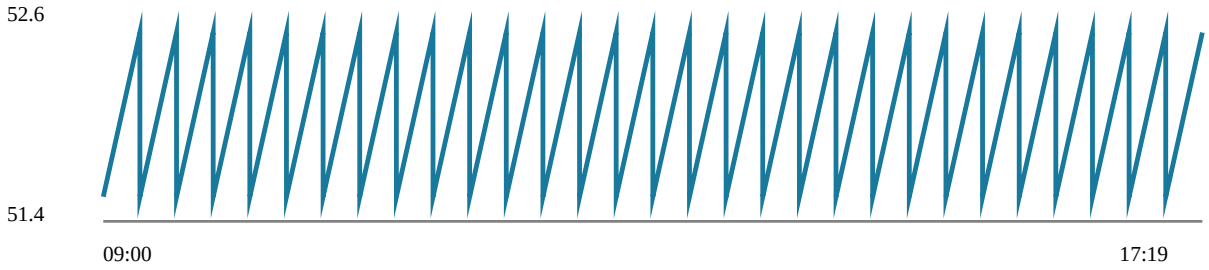

Current (A): negative = charging



Method: P = V x I; energy is trapezoidal integrated power over time. Negative current denotes charging and positive current denotes discharging. Efficiency equals discharge energy divided by charge energy. For meaningful round-trip efficiency, use a comparable full cycle with matching starting/ending SOC. This is not a certified electrical safety report.