Engineering Battery Test Report

Source: test_normal.csv | 2026-10-28 09:00 to 2026-10-28 09:01

Metric	Result
Duration (h)	0.03
Samples	120
Charge energy (kWh)	0.00
Discharge energy (kWh)	0.03
Round-trip efficiency (%)	N/A
Voltage min / avg / max (V)	47.47 / 48.09 / 48.56
Current min / max (A)	16.21 / 19.73
Peak charge / discharge (kW)	0.00 / 0.96
SOC start / end (%)	62.0 / 67.4
Test assessment	PASS
Maximum voltage limit (V)	60.00
Maximum absolute current limit (A)	40.00

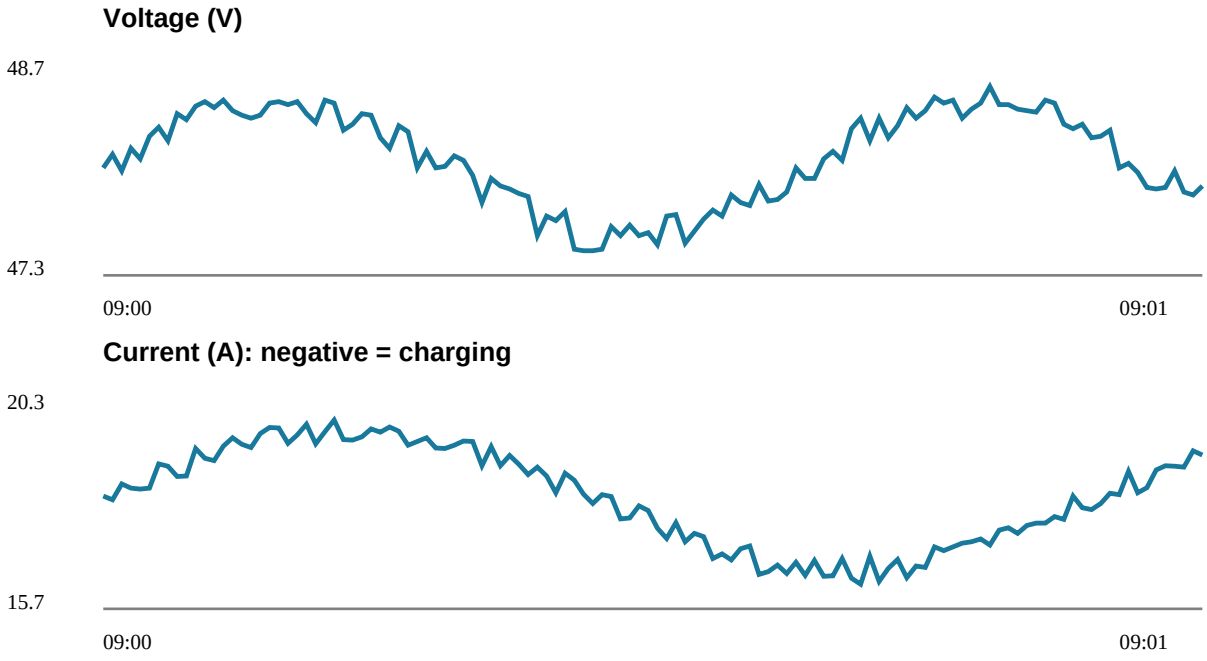

Method: P = V x I; energy is trapezoidal integrated power over time. Negative current denotes charging and positive current denotes discharging. Efficiency equals discharge energy divided by charge energy. For meaningful round-trip efficiency, use a comparable full cycle with matching starting/ending SOC. This is not a certified electrical safety report.