


White Space Layout Sheet

A · The room


1 m = 100 px · walls 8.00 m

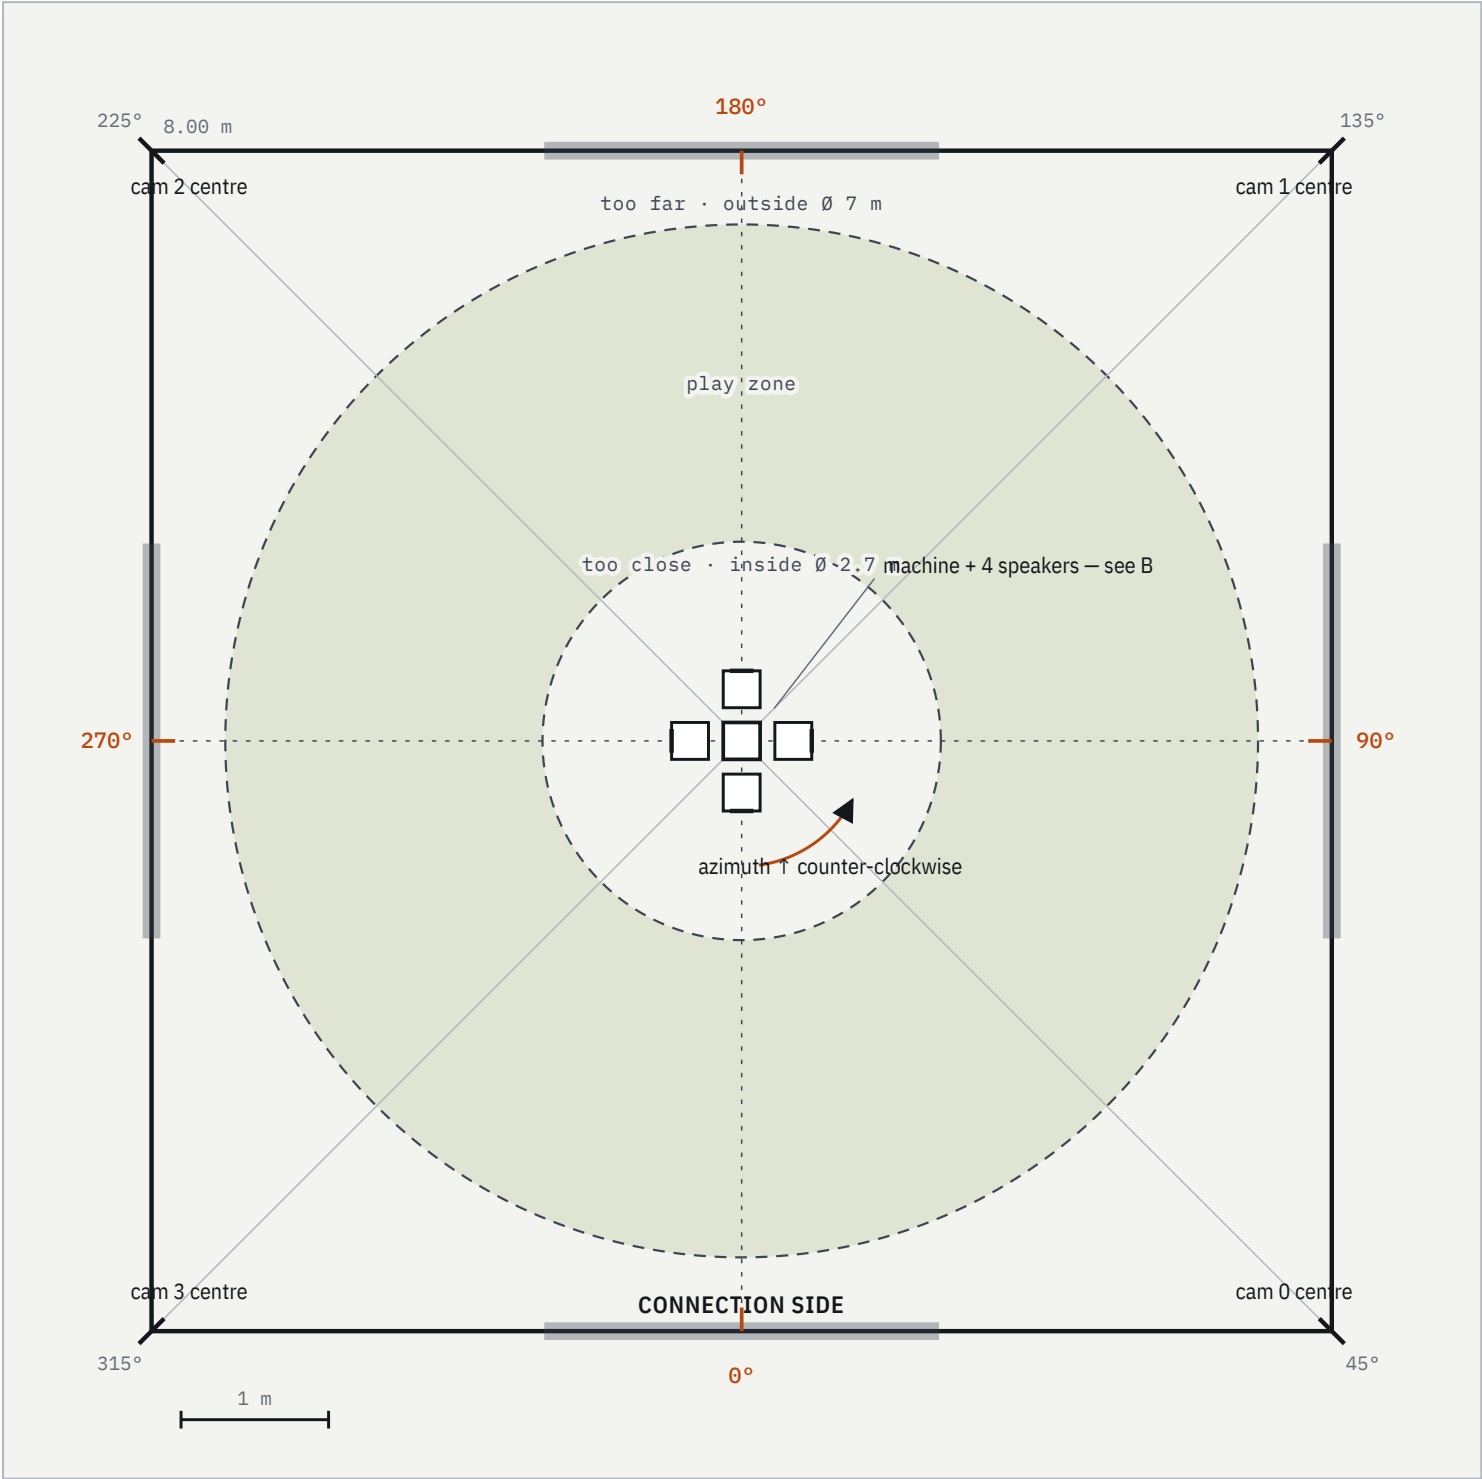

The ring lands on the walls. Cameras on the cube's corners point at 45°, 135°, 225°, 315° — the room's corners (the *show_centre* marks). Their sector boundaries are the face azimuths 0°, 90°, 180°, 270° — the wall centres — each with an 18.5° overlap either side from the 127° lenses (the *show_overlap* bands). Azimuth 0 is the connection side. People play between 1.35 m and 3.5 m from the machine: inside Ø 2.7 m is too close, outside Ø 7 m too far. The four speakers stand 10 cm off the cube's faces, pointing outward.

B · The machine

1 cm = 8 px · 1 : 5

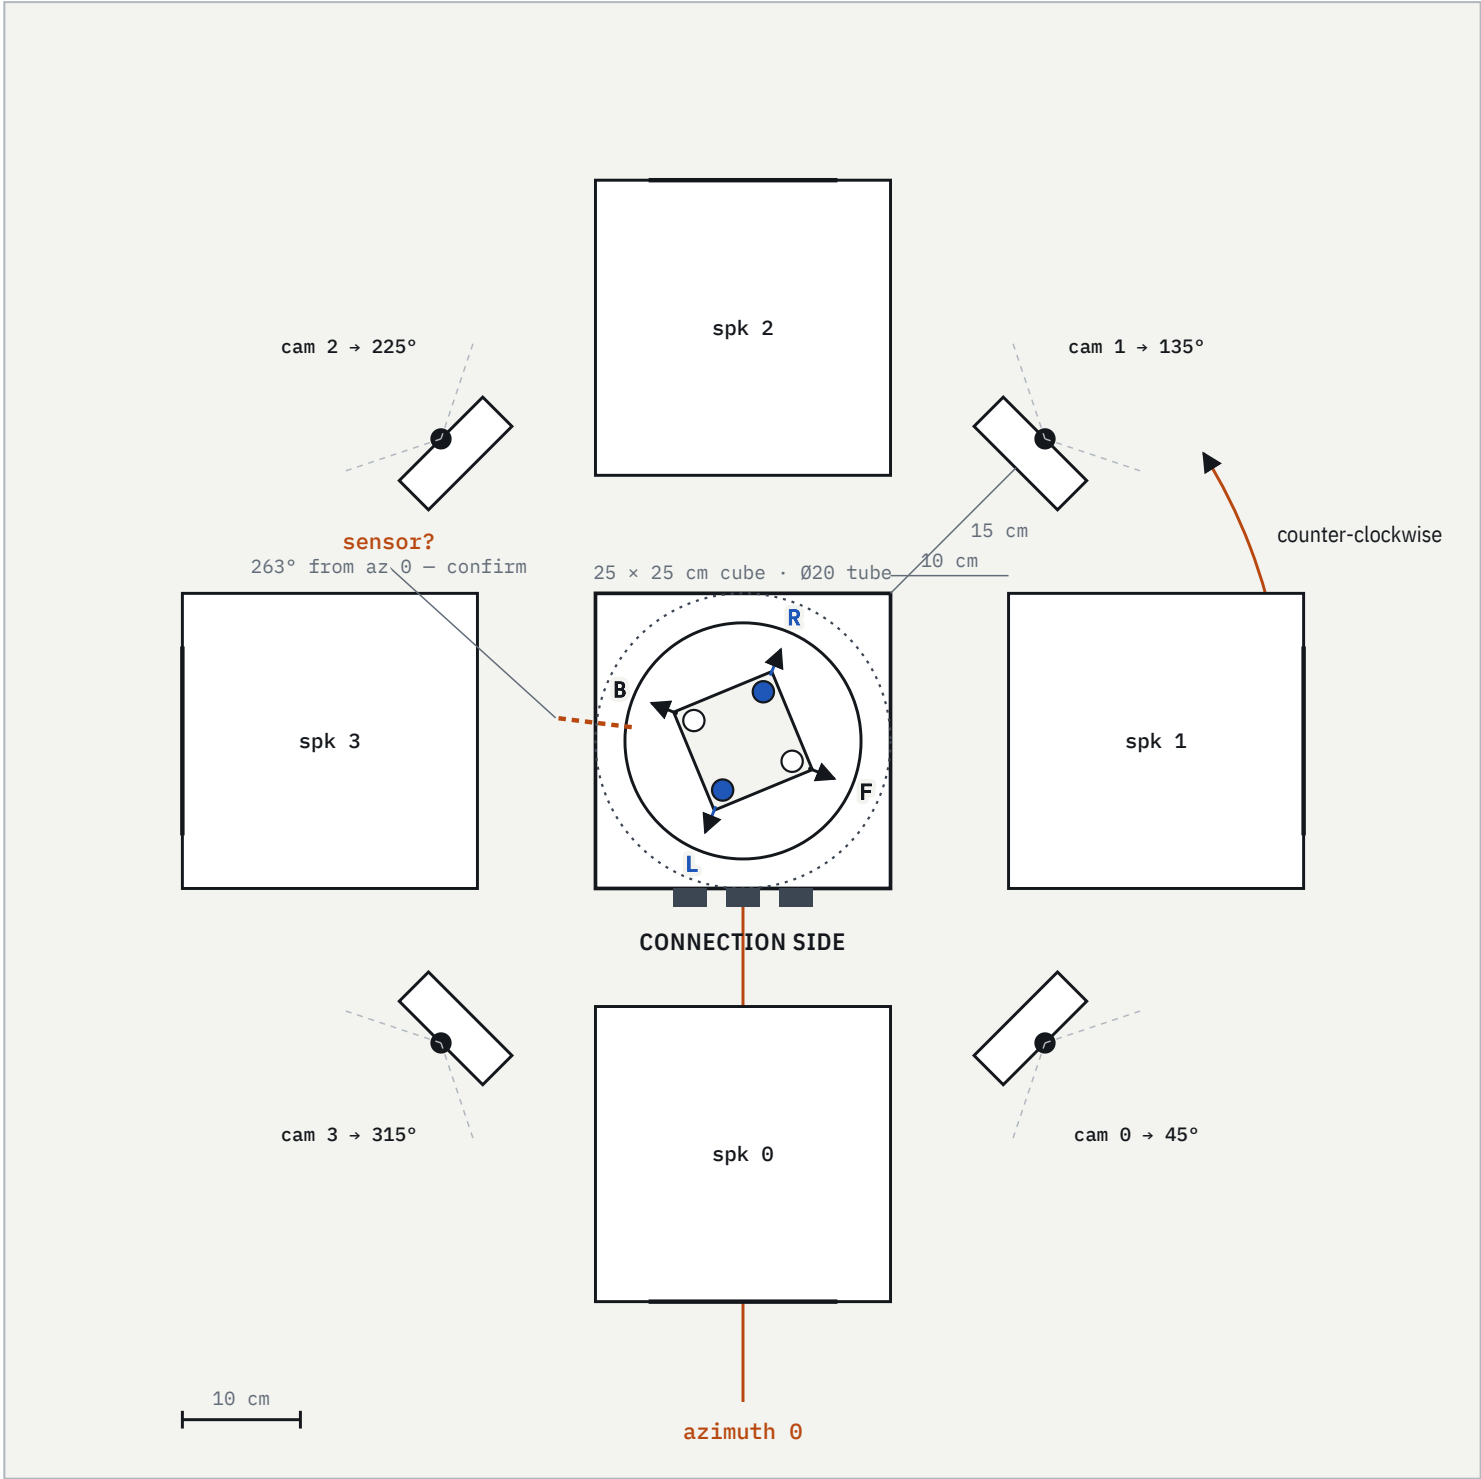

The 25 cm cube, connection side at the bottom, with the Ø25 / Ø20 ring and the Ø20 tube; the 9 cm rotating head with its lamps F, B, L, R (see the legend). Speakers 10 cm off the faces pointing outward, speaker 0 on the connection side; cameras on the corner azimuths 15 cm beyond the cube (assumed), camera 0 at the corner counter-clockwise of the connection side — far enough that no speaker enters a camera's field. The sensor is drawn where playhead.phase predicts it, 263° from azimuth 0 on the left face, to be confirmed.

LAYOUT, COUNTER-CLOCKWISE FROM AZIMUTH 0

az	what	where on the cube
0°	speaker 0 · seam cam 3 cam 0	connection side (bottom face), 10 cm off
45°	camera 0	bottom-right corner, 15 cm out
90°	speaker 1 · seam cam 0 cam 1	right face, 10 cm off
135°	camera 1	top-right corner, 15 cm out
180°	speaker 2 · seam cam 1 cam 2	top face, 10 cm off
225°	camera 2	top-left corner, 15 cm out
270°	speaker 3 · seam cam 2 cam 3	left face, 10 cm off
315°	camera 3	bottom-left corner, 15 cm out

LEGEND

-  white lamps: **F** front, at the playhead heading θ · **B** back, at $\theta+180^\circ$
-  blue lamps: **L** blue[0] “left”, at $\theta-90^\circ$ · **R** blue[R/2] “right”, at $\theta+90^\circ$ (B drawn with $\theta = 67.5^\circ$)
-  azimuth frame and items to confirm on site
-  sector boundary = seam (a corner azimuth)
-  camera overlap, $\pm 18.5^\circ$ — what *show_overlap* paints
-  camera centre — what *show_centre* paints
-  play zone, $\varnothing$ 2.7 m to $\varnothing$ 7 m (1.35 m to 3.5 m from the axis); dashed circles are its limits

DIMENSIONS USED (SITE FACTS)

- Cube $25 \times 25 \times 28$ cm; connection rings $\varnothing 25$ outer / $\varnothing 20$ inner $\times$ 3.5 cm; tube $\varnothing 20 \times 154$ cm; head 9×9 cm.
- Cameras: OAK-D Pro W, the left mono camera (OV9282 W, $127^\circ \times 79.5^\circ$, 150° diagonal; the app's 720-row crop gives 71.6° vertical, the preset's number). $10 \times 3.5 \times 3.5$ cm on 50 cm tripods (their minimum, kept so they shade the light least; the fixture's bottom is at 32 cm), on the corner azimuths 15 cm beyond the cube's corners (assumed) — lens $\approx$ 36 cm from the axis and $\approx$ 52 cm up, tilted up so the head is in frame from the $\varnothing$ 2.7 m circle: 11° with the full 800 rows (full body at the circle), 14° with today's 720 crop (feet from $\varnothing$ 3.3 m). The left lens sits 37.5 mm off the tripod thread — put the lens on the corner line, not the thread. The preset's parallax ring radius (25 cm) wants updating to 36.
- Speakers $25 \times 25 \times 33$ cm, parallel to the faces and 10 cm off them (they must not touch the fixture), pointing outward — centres 35 cm from the axis.
- Room 8×8 m, machine in the middle. Play zone between 1.35 m and 3.5 m from the axis ($\varnothing$ 2.7 m to $\varnothing$ 7 m); the cameras' hard floor is $\varnothing$ 2.0 m, inside which the seams are blind.

TO CONFIRM ON SITE

- Camera 0 stands at the corner counter-clockwise of the connection side (bottom-right on the sheet); the others follow counter-clockwise.
- At high speed, *test_calibration* puts its centre bands on the room's corners and its overlap bands on the wall centres.
- At low speed, the flash fires as the beam crosses someone standing on a face azimuth. Whichever of these two is off by about 11° carries the residual.
- The sensor is where B predicts it, 263° from azimuth 0 — on the left face, about 7° off its centre. If it is elsewhere, playhead.phase changes accordingly.
- Which physical strip the fixture labels “blue left” is wired to blue[0].
- The 15 cm camera gap beyond the corners: with the speakers 10 cm off the faces the nearest speaker corner is 76° off-axis; at 10 cm it would be a marginal 66° , on the corner itself 49° and inside the field.
- The up-tilt: at $\varnothing$ 2.7 m a person's head is in frame with margin; a seam person is about three quarters visible in each camera ($\approx$ 3° azimuth wobble at the handover). Level cameras would need $\varnothing$ 3.5 m (800 rows) or $\varnothing$ 4.0 m (720 crop) for a full body.

SHEET	REFERENCE	FRAME	COMPANION	STATUS
Layout plan · A room · B machine	Connection side of the cube	Azimuth, 0° at the centre of the connection side, CCW +	apps/white_space/data/CALIBRATION.md	Proposed fixed layout — items in orange to confirm