

ESP32C3 Wireless Control Unit

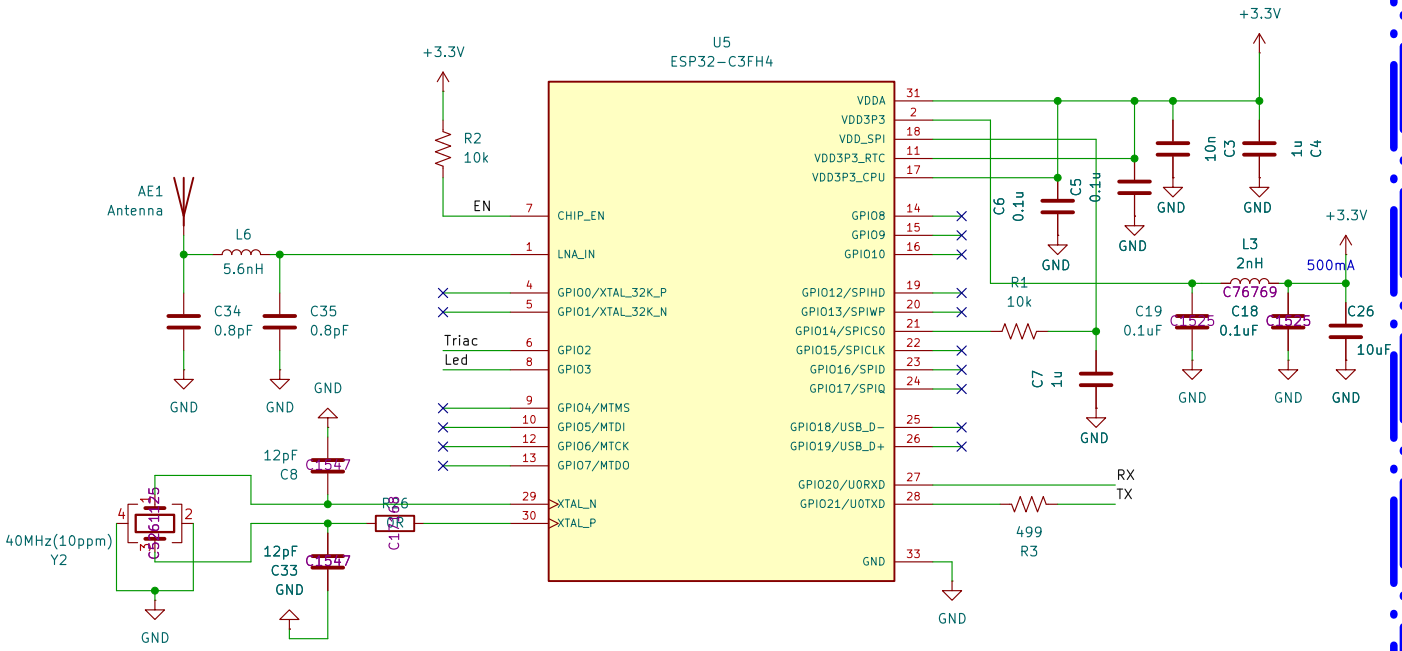


230 VAC TRIAC Load Driver

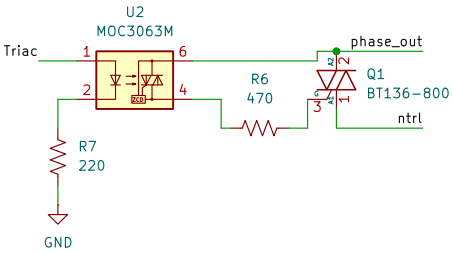


The 230 VAC TRIAC Load Driver uses an optotriac to electrically isolate the ESP32-C3 from the mains and controls the load through a BT136 TRIAC. Compared with a mechanical relay, a TRIAC provides silent, faster, and wear-free switching with no moving contacts, making it more compact and better suited for frequent switching in a smart-switch application.


230 VAC to 5 V Power Supply

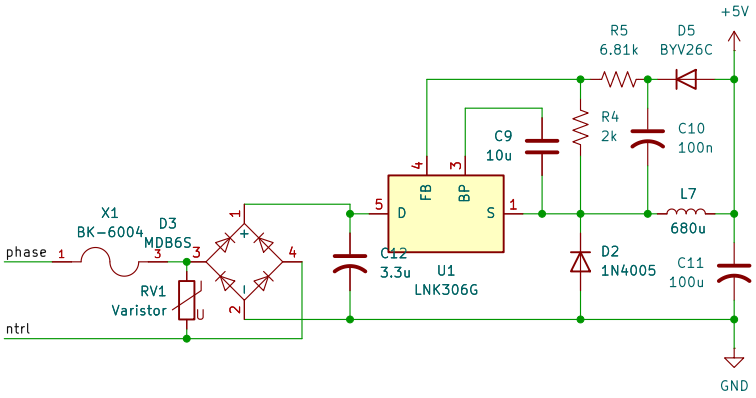

Status Indicator



3.3 V Voltage Regulation

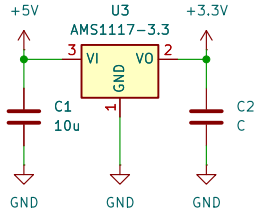

Smart wireless switch

File: wireless switch.kicad_sch

Title:

Size: A4	Date:	**Rev: bejaoui hamza**
KiCad E.D.A. 10.0.1		Id: 1/1