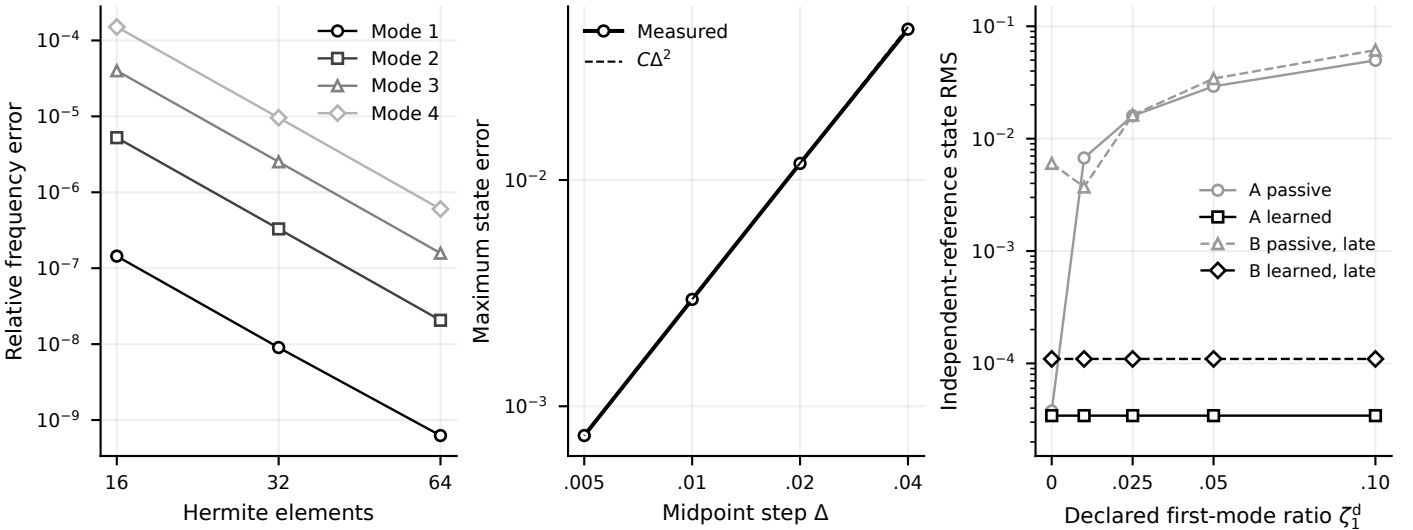
(a) FE / continuum check
Relative frequency error
Hermite elements
16
32
64
Mode 1
Mode 2
Mode 3
Mode 4
(b) Route-A oracle order
Maximum state error
Midpoint step Δ
.005
.01
.02
.04
Measured
CΔ²
(c) Refit at every damping value
Independent-reference state RMS
Declared first-mode ratio ζ₁ᵈ
0
.025
.05
.10
A passive
A learned
B passive, late
B learned, late