
Implementation of Nock Combinator Logic in Hardware: The NockPU Project

~mopfel-winrux
Native Planet · Southwestern Pool Supply Co.

Abstract

This paper presents the design, implementation, and evaluation of NockPU, a hardware processor that directly executes Nock 4k, a minimalist combinator calculus serving as the foundation for the Urbit computing platform. The research demonstrates the feasibility of implementing all twelve Nock operations in hardware using FPGA-based graph reduction techniques. Key architectural decisions include a cell-based memory representation optimized for 64-bit words, stackless tree traversal using breadcrumb techniques, and integrated Cheney-style copying garbage collection. Performance analysis identifies two primary challenges: excessive memory consumption due to intermediate structure creation during reduction, and computational complexity arising from the graph transformation approach required by combinator reduction. The implemented garbage collector successfully addresses memory consumption issues, preventing system crashes during complex computations. While computational efficiency remains challenging compared to traditional architectures, the NockPU establishes that hardware Nock 4k implementation is viable and provides a foundation for specialized functional computation with advantages in determinism and semantic clarity.

Contents

31	1 Introduction	3
32	1.1 Related Work and Motivation	4
33	1.2 Project Goals and Approach	5
34	2 Background and Related Work	5
35	2.1 Nock Specification and Semantics	5
36	2.2 Digital Hardware Design Fundamentals	6
37	2.3 Existing Hardware Implementations of Functional Languages	6
38	2.4 Stack-based vs. Stackless Architectures	7
39	2.5 Memory Representation Challenges in Functional Computing	7
40		
41		
42	3 NockPU Architecture	8
43	3.1 System Overview and Design Philosophy	8
44	3.2 Memory Representation Model	10
45	3.2.1 28-bit Nouns in 64-bit Words	10
46	3.2.2 Tag Bit Utilization	11
47	3.2.3 Atom and Cell Representation	12
48	3.3 Stackless Tree Traversal Mechanism	12
49	3.3.1 Program Pointer and Back Pointer Methodology	12
50	3.3.2 Breadcrumb Trail Implementation	13
51	3.4 Control Flow Architecture	14
52	3.4.1 Memory Traversal Control	14
53	3.4.2 Execute Module	15
54	3.4.3 Operational Modules	15
55	3.4.4 Error Handling and System Integrity	16
56	3.4.5 Garbage Collection Implementation	16
57		
58	4 Implementation Details	17
59	4.1 Hardware Design Process and Tools	17
60	4.1.1 Verilog Implementation	17
61	4.1.2 Testing and Verification Methodology	18
62	4.2 Nock Operation Implementation	19
63	4.2.1 Basic Operations (Slot, Zero, One)	19

64	4.2.2	Tree Manipulation Operations	19
65	4.2.3	Conditional Operation Implementation	21
66	4.2.4	Composition, Push, and Call Operations	21
67	4.2.5	Edit Operation Implementation	22
68	4.2.6	Hint Operation Implementation	22
69	4.3	Memory Management	23
70	4.3.1	Heap Allocation Strategy	23
71	4.3.2	Memory Access Patterns	23
72	5	Evaluation and Analysis	23
73	5.1	Test Methodology	24
74	5.1.1	Test Bench Design	24
75	5.1.2	Operation Verification	24
76	5.2	Performance Metrics	24
77	5.3	Limitations and Challenges	26
78	5.3.1	Memory Consumption Issues	26
79	5.3.2	Performance Bottlenecks	26
80	5.3.3	Conditional Operation Overhead	27
81	6	Future Work	27
82	6.1	Arbitrary-size Atom Support	27
83	6.2	Hardware Jetting Strategy	28
84	7	Discussion and Implications	28
85	7.1	Theoretical Implications for Computer Archi- tecture	28
86	7.2	Practical Applications	29
87	7.2.1	Low-power Computing	29
88	7.2.2	Verifiable Computing	29
89	7.3	Comparison with Traditional Architectures	30
90	8	Conclusion	30

1 Introduction

Combinator calculi represent a fundamental approach to computation based on the application and reduction of combinators – operators that compose and transform data without re-

quiring named variables. Nock is a specific combinator calculus developed as the foundation of Urbit, a clean-slate computing platform. It provides a deterministic, stateless computing environment that trades performance for perfect semantic clarity. While Nock interpreters typically run in software environments (e.g., the C-based Vere interpreter and Rust-based NockVM interpreter for Urbit), little exploration has been done regarding the direct implementation of Nock in hardware.

Implementing Nock in hardware presents unique challenges fundamentally different from traditional assembly languages. While conventional processors operate on byte buffers stored in linear memory arrays, Nock computation operates on *nouns* – recursive tree structures that exist as linked data rather than contiguous memory blocks. This fundamental difference means that traditional hardware architectures, optimized for sequential memory access patterns and fixed-width data types, are poorly suited for the tree traversal and dynamic memory allocation patterns inherent to Nock execution. The challenge lies not merely in implementing the Nock operations themselves, but in developing memory representations and traversal mechanisms that can efficiently handle the recursive, pointer-based data structures that define Nock’s computational model.

The motivation behind this research was initially quite straightforward: to address skepticism about whether Nock could be effectively implemented in hardware.

1.1 Related Work and Motivation

Hardware implementation of functional languages has historical precedent, with notable examples including the SKIM (S, K, I reduction machine) developed at Cambridge in the 1970s and more recent work on The Reduceron at the University of York. However, these projects have typically focused on more traditional functional programming languages rather than the minimal, axiomatic approach of Nock. Additionally, most prior research has not sufficiently addressed the challenges of scaling such systems to utilize both on-chip and off-chip memory effectively.

1.2 Project Goals and Approach

This project aimed to answer several key questions:

1. How can Nock’s nouns and operations be efficiently represented in hardware memory?
2. What hardware architecture best supports the pattern of execution required by Nock?
3. How can tree traversal be implemented without a stack-based approach?
4. What performance characteristics emerge from a hardware implementation compared to software interpreters?

The primary objective was to build a Verilog-based NockPU that could perform all standard Nock operations, thereby demonstrating the feasibility of hardware-based combinator reduction while identifying optimal design patterns for such an implementation.

2 Background and Related Work

2.1 Nock Specification and Semantics

Nock is a minimalist combinator calculus defined by a small set of axiomatic rules (sorreg-namtyv, 2013). Its specification begins with: “A noun is an atom or a cell. An atom is a natural number. A cell is an ordered pair of nouns.” The computational core of Nock is expressed through reduction rules that transform nouns based on operator codes. For example, the reduction rule $*[a \ 0 \ b]$ performs a slot operation (tree addressing), while $*[a \ 2 \ b \ c]$ evaluates $*[*[a \ b] \ *[*[a \ c]]]$, and so forth.

Nock’s extreme simplicity makes it an interesting target for hardware implementation. It requires only a handful of operations, has no need for floating-point arithmetic, and functions in a completely deterministic manner (sorreg-namtyv et al., 2016). Yet, this same simplicity can lead to computational inefficiency when compared to traditional architectures, as Nock

164 requires graph transformations for even basic arithmetic oper-
 165 ations.

166 2.2 Digital Hardware Design Fundamentals

167 Field-Programmable Gate Arrays (FPGAs) allow for reconfig-
 168 urable digital hardware design, making them ideal for proto-
 169 typing novel processor architectures. Unlike traditional soft-
 170 ware that executes sequentially, hardware designs in languages
 171 like Verilog describe circuits where operations occur in paral-
 172 lel, governed by clock cycles.

173 The design process involves:

- 174 1. Creating a high-level design using Hardware Descrip-
 175 tion Language (HDL)
- 176 2. Building test benches to verify functionality
- 177 3. Synthesis (converting HDL to netlist)
- 178 4. Place and Route (mapping netlist to FPGA resources)
- 179 5. Timing analysis and program file generation

180 2.3 Existing Hardware Implementations of Functional Lan- 181 guages

182 Several significant projects have attempted to implement func-
 183 tional programming languages directly in hardware:

184 **SKIM (S, K, I reduction machine)**: Developed by Clarke
 185 et al. at Cambridge in the 1970s and 1980s (Clarke et al.; Nor-
 186 man, Clarke, and Stoye, 1980; 1984), SKIM implemented com-
 187 binatory logic directly in hardware. It pioneered many of the
 188 techniques for graph reduction that influenced later work.

189 **The Reduceron**: More recently, work at the University of
 190 York by Naylor and Runciman has produced The Reduceron
 191 (Naylor; Naylor and Runciman, 2009; 2008), an FPGA-based graph
 192 reduction machine initially designed for executing Haskell pro-
 193 grams using basic combinators (S, K, I, B, C). Later versions
 194 moved to more complex supercombinator implementations.

195 While these implementations provide valuable precedent,
196 they differ from the NockPU in several important ways:

- 197 1. They primarily target conventional functional languages
198 rather than a minimal combinator calculus like Nock
- 199 2. They typically employ stack-based reduction strategies
- 200 3. They have focused less on scalability across on-chip and
201 off-chip memory boundaries

202 2.4 Stack-based vs. Stackless Architectures

203 Traditional approaches to traversing tree structures in hard-
204 ware often rely on stack-based mechanisms, wherein a stack
205 stores return addresses or intermediate state during traversal.
206 While intuitive, this approach can introduce complexity in hard-
207 ware implementation and potentially limit parallelism.

208 The stackless approach, in contrast, embeds navigational
209 information directly within the tree structure itself, allowing
210 for traversal without external stack state. This technique re-
211 quires careful consideration of how to mark nodes during traver-
212 sal and how to restore the tree to its original form afterward,
213 but can offer advantages in certain hardware contexts.

214 2.5 Memory Representation Challenges in Functional Com- 215 puting

216 Representing functional data structures efficiently in memory
217 presents several challenges. Traditional memory is organized
218 as a linear array of words, while functional data often takes the
219 form of trees or graphs. Additionally, functional programs fre-
220 quently create and discard temporary structures during evalua-
221 tion, necessitating effective memory management strategies.

222 In hardware implementations, memory access patterns sig-
223 nificantly impact performance. On-chip memory offers fast
224 access but limited capacity, while off-chip memory provides
225 greater capacity at the cost of higher latency. Effective design
226 must carefully balance these tradeoffs.

3 NockPU Architecture

3.1 System Overview and Design Philosophy

The NockPU is designed as a specialized processor that directly executes Nock operations in hardware. Its architecture emphasizes several key principles:

1. **Memory-centric design:** Since combinator reduction is fundamentally about memory manipulation, the architecture prioritizes efficient memory operations.
2. **Deterministic execution:** The system maintains Nock's deterministic nature, ensuring consistent results for identical inputs.
3. **Stackless traversal:** Rather than relying on a traditional stack for tree traversal, the NockPU embeds traversal state within the memory structure itself.
4. **Scalability across memory boundaries:** The design accommodates both on-chip and off-chip memory, allowing for larger computations than could fit in on-chip memory alone.

Figure 1 illustrates the overall system architecture of the NockPU, showing the interconnections between its major components. The Memory Traversal Unit serves as the central coordinator, managing communication between the execution subsystems and memory hierarchy. The architecture demonstrates a clear separation between control logic, execution units, and memory management, enabling modular design and efficient resource utilization.

Memory Subsystem

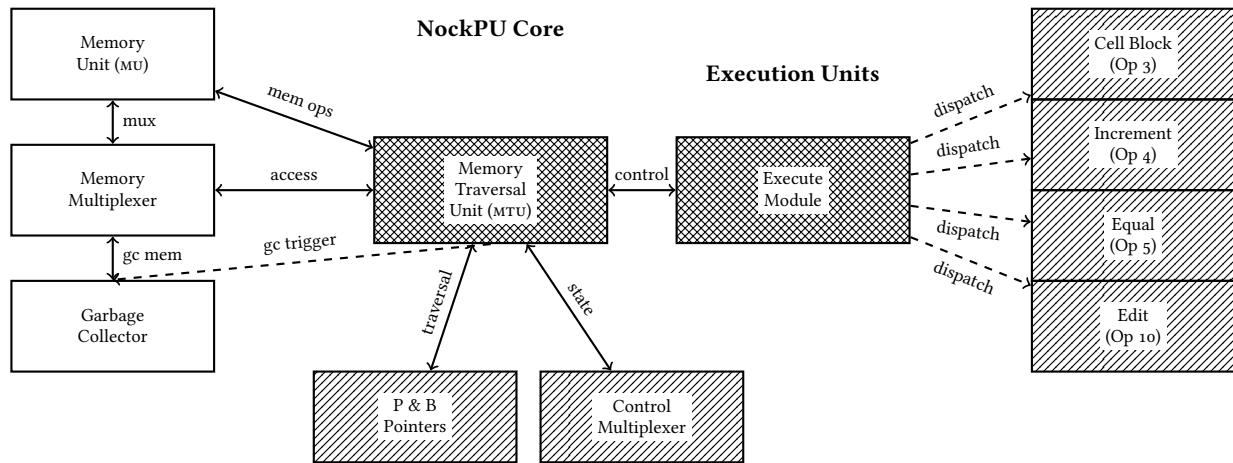


Figure 1: NockPU System Architecture Overview. The Memory Traversal Unit serves as the central controller, coordinating between execution modules and memory management components. Specialized operation blocks handle specific Nock opcodes, while the memory subsystem provides cell-based storage with integrated garbage collection. Bidirectional arrows (red) indicate control and data flow, while unidirectional arrows (blue) show dispatch operations.

The execution pipeline flows from the Memory Traversal Unit to specialized operation blocks through the Execute Module, which acts as a dispatcher for different Nock opcodes. This design allows each operation type to be optimized independently while maintaining consistent control interfaces. The memory subsystem integrates traditional storage with garbage collection, providing the specialized memory management required for combinator reduction.

The architecture implements explicitly single-threaded execution, consistent with Nock’s deterministic semantics. This design choice ensures that all computations proceed in a predictable, sequential manner, eliminating race conditions and maintaining the mathematical purity that characterizes Nock evaluation.

3.2 Memory Representation Model

3.2.1 28-bit Nouns in 64-bit Words

The NockPU represents Nock nouns using a custom memory format. Each memory cell is 64 bits wide, divided as follows:

- 8 tag bits (highest bits)
- 28 bits for the head noun
- 28 bits for the tail noun

This representation allows for efficient storage of Nock’s binary tree structure while providing room for necessary metadata. The 28-bit limitation for nouns was chosen based on practical FPGA constraints: most commercially available FPGAs have at most 256MB of directly accessible on-board memory, making 28-bit addressing sufficient while maintaining efficient 64-bit word alignment. This design choice facilitates straightforward scaling across different FPGA platforms, as the architecture can be trivially adjusted for larger memory configurations when available, though the architecture includes provisions for handling arbitrarily large atoms through linked representations.

3.2.2 Tag Bit Utilization

Tag bits represent auxiliary metadata embedded within memory words to support architectural features beyond basic data storage. In traditional von Neumann architectures, such metadata is typically maintained in separate control structures or registers. However, the NockPU's specialized design for combinator reduction necessitates embedding control information directly within the memory representation to enable efficient stackless traversal and cell-based addressing.

The NockPU's tag bit architecture serves several critical functions essential for hardware-based functional computation. The stackless tree traversal mechanism requires embedding traversal state within memory cells themselves, using dedicated bits to track which branches have been visited during tree navigation. The cell-addressed memory model demands type information to distinguish between atoms and cells at the hardware level. Additionally, execution control bits mark cells requiring evaluation, while reserved bits provide extensibility for future architectural enhancements.

Table 1 provides a complete specification of the 8-bit tag field structure used in the NockPU's 64-bit memory words. Each tag bit serves a specific architectural purpose, from execution control to traversal state management, enabling the processor to maintain the semantic clarity of Nock computation while achieving practical hardware implementation.

Table 1: NockPU Tag Bits Layout (Bits 63-56)

Bit	Name	Explanation
63	Execute	Marks cell as requiring execution
62	Stack	Contains operation code and operand
61	Reserved	Reserved for future extensions
60	Large Atom	Atom larger than 28 bits
59	Head Traversal	Tracks head traversal state
58	Tail Traversal	Tracks tail traversal state
57	Head Tag	Head is atom (0) or cell (1)
56	Tail Tag	Tail is atom (0) or cell (1)

Example: The Nock cell [42 43] is represented as a 64-bit word with the following bits:

Tag bits (63–56): 00000011₂
 (both head and tail are atoms)
 Head (55–28): 0x000002A₂
 (28-bit representation of 42)
 Tail (27–0): 0x000002B₂
 (28-bit representation of 43)
 Complete word: 0x03000002A000002B₂

3.2.3 Atom and Cell Representation

In the NockPU memory model, atoms (natural numbers) are represented directly within the 28-bit fields when possible. For atoms that exceed this limit, the system can use multiple memory cells linked together.

Cells are represented as pointers to other memory locations. When both the head and tail of a cell are direct atoms, they can be stored directly within a single memory word. When either is a cell, the corresponding field contains a pointer to another memory location.

3.3 Stackless Tree Traversal Mechanism

3.3.1 Program Pointer and Back Pointer Methodology

The NockPU implements a stackless approach to tree traversal (Burrows, 2009) using two primary pointers:

1. **Program Pointer (P):** Points to the current node being processed
2. **Back Pointer (B):** Points to the previous node in the traversal

Together, these pointers allow the system to navigate the tree structure without requiring a separate stack. The approach fundamentally works by leaving “breadcrumbs” in the form of modified pointers that enable retracing steps back up the tree after descending.

3.3.2 Breadcrumb Trail Implementation

The stackless traversal mechanism operates by temporarily modifying tree pointers to create navigational breadcrumbs, as demonstrated in Figure 2. This approach eliminates the need for external stack memory while maintaining the ability to navigate complex tree structures during Nock evaluation.

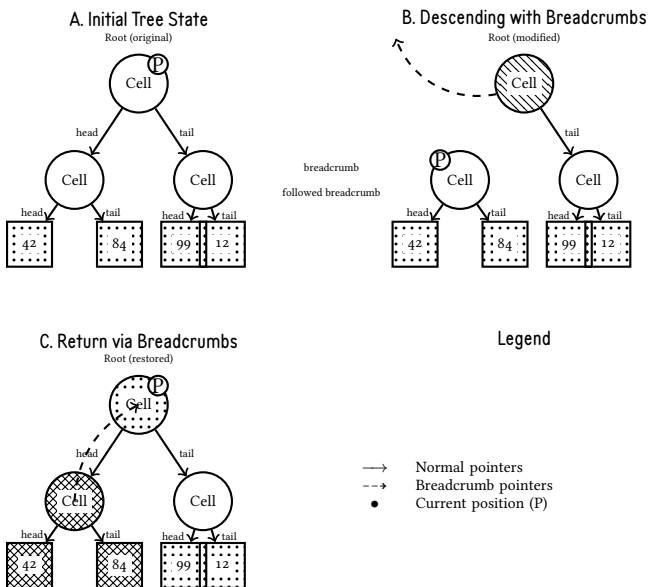


Figure 2: Stackless Tree Traversal Sequence demonstrating breadcrumb-based navigation without a traditional call stack. The NockPU implements tree traversal without a stack by modifying pointers to create breadcrumb trails. Sequence:

- Initial tree state with root and subtrees.
- Descend into the left subtree leaving breadcrumb.
- Follow breadcrumb back to root to continue with right.

The traversal sequence shown in the figure illustrates the three-phase operation: initialization, descent with breadcrumb creation, and return via breadcrumb following. In panel A, the

tree exists in its canonical form with normal pointer relationships. Panel B shows the critical breadcrumb creation phase, where the processor modifies the root cell's head pointer to store a return path before descending into the left subtree. Panel C demonstrates the return mechanism, where the breadcrumb is followed back to the root, restoring the original pointer structure while marking the left subtree as visited.

As the processor traverses the tree, it modifies the memory cells it visits, effectively leaving a trail that can be followed back up. When descending into a subtree, the processor redirects the pointer in the left part of the cell to point to the parent node, from which execution flow just came. This creates a pathway back up the tree.

The tag bits for head and tail traversal (bits 59 and 58) track which branches have been visited, allowing the processor to determine which subtree to explore next during traversal.

This mechanism ensures that:

1. The processor can always retrace its steps
2. The original tree can be reconstructed after traversal
3. Shared subtrees remain unmodified, preserving the integrity of the graph

3.4 Control Flow Architecture

3.4.1 Memory Traversal Control

The Memory Traversal Unit (MTU) serves as the master controller for the NockPU, orchestrating the overall execution flow. It performs several key functions:

1. Initiates tree traversal to find nodes marked for execution
2. Maintains the program and back pointers
3. Passes control to specialized execution modules when appropriate

4. Coordinates memory access through the memory multiplexer

The MTU operates according to a finite state machine that manages the complex coordination between memory operations, tree traversal, and execution control. The state machine includes states for memory access initiation, traversal coordination, execution delegation, and result handling. State transitions are triggered by completion signals from subordinate modules, memory operation acknowledgments, and the detection of execution markers within the traversed tree structure. This state-driven approach ensures that all memory operations complete properly before proceeding and that control flow remains deterministic throughout the computation process.

3.4.2 Execute Module

The Execute module handles the reduction of Nock operations when triggered by the MTU. It receives the address and data for a cell marked for execution, performs the appropriate transformation according to the Nock operation code, and returns control to the MTU when complete.

This module contains specialized logic for each Nock operator (0 through 11), implementing their specific reduction rules. For operators that generate nested executions, the Execute module restructures the memory to reflect the transformed computation and marks the relevant cells for future execution.

3.4.3 Operational Modules

In addition to the core Execute module, the NockPU includes several specialized modules for specific operations:

- **Cell Block:** Handle type checking for the cell operator (opcode 3)
- **Increment Block:** Implement increment operations (opcode 4)
- **Equal Block:** Perform equality comparisons (opcode 5)

- **Edit Block:** Handle tree modification for the replace operator (opcode 10)

These specialized modules allow for more efficient implementation of specific operations and better utilization of hardware parallelism.

3.4.4 Error Handling and System Integrity

The NockPU includes a comprehensive error detection and reporting system to maintain system integrity during execution. When an error condition is encountered—such as malformed nouns, invalid operation codes, or memory access violations—the system raises an error signal and provides diagnostic information through an error code bus. This approach allows for graceful error handling while maintaining the deterministic nature of Nock execution, ensuring that invalid computations are detected rather than producing undefined results.

3.4.5 Garbage Collection Implementation

The NockPU implements a Cheney-style copying garbage collector based on the algorithm described by Clark (Clark, 1976). This implementation addresses the significant memory consumption challenges inherent in combinator reduction by reclaiming memory occupied by intermediate structures that are no longer reachable.

The garbage collection process operates as follows:

1. **Traversal Reset:** Before initiating garbage collection, the system resets any active tree traversal state, ensuring that breadcrumb modifications are properly unwound and the memory representation returns to its canonical form.
2. **Copying Phase:** Using Cheney's two-space copying algorithm, reachable nouns are copied from the current memory space to a clean memory partition, with pointer updates maintaining referential integrity.

3. **Space Flip:** Once copying is complete, the roles of the two memory spaces are exchanged, making the compacted space the active working memory.

A key advantage of this design is that computation state does not need to be recreated after garbage collection. Since the NockPU's execution model is based on marking cells for execution rather than maintaining complex execution stacks, the collector can preserve all necessary computational context during the copying process. This allows garbage collection to occur transparently without requiring expensive state reconstruction. The tradeoff is that the traversal reset process takes some clock cycles, but this approach eliminates the need to maintain extra state during garbage collection.

The copying collector approach is particularly well-suited to the NockPU's stackless architecture, as it eliminates the need to traverse and update complex stack structures during collection. The collector operates entirely through memory scanning and pointer updating, maintaining compatibility with the breadcrumb-based traversal mechanism used throughout the system.

4 Implementation Details

4.1 Hardware Design Process and Tools

4.1.1 Verilog Implementation

The NockPU was implemented in Verilog, a hardware description language that allows for precise control over the digital circuit design. The implementation follows a modular approach, with separate components for different functional aspects of the processor.

Key Verilog modules include:

- Memory Unit (`memory_unit.v`)
- Memory Traversal Unit (`mem_traversal.v`)
- Execute Module (`execute.v`)

- 474 • Specialized Operation Blocks
- 475 • Memory Multiplexer (`memory_mux.v`)
- 476 • Control Multiplexer (`control_mux.v`)

477 Each module was designed with clear interfaces and tested in-
 478 dependently before integration.

479 4.1.2 Testing and Verification Methodology

480 A comprehensive testing framework was developed to verify
 481 the correctness of the NockPU implementation across multiple
 482 levels of abstraction:

483 **End-to-End Testing:** The primary verification approach
 484 uses an end-to-end test bench (`execute_tb`) that inputs known
 485 Nock formulas and compares the resulting output with a refer-
 486 ence Nock interpreter. This approach ensures semantic equiv-
 487 alence between the hardware implementation and established
 488 software interpreters, validating that the NockPU produces
 489 correct results for complete Nock programs.

490 **Component-Level Testing:** Individual subsystems are
 491 verified through dedicated test benches:

- 492 • Memory traversal test bench: Verifies the correctness of
 493 the stackless tree traversal mechanism, ensuring proper
 494 navigation and breadcrumb management
- 495 • Memory operations test bench: Validates basic memory
 496 read, write, and allocation operations across the bisected
 497 memory architecture

498 This modular testing approach allows for isolation of function-
 499 ality and systematic debugging, enabling verification of both
 500 individual components and their integration. The test benches
 501 provide comprehensive coverage of the processor’s operational
 502 modes and edge cases, ensuring robust implementation of the
 503 Nock specification.

4.2 Nock Operation Implementation

4.2.1 Basic Operations (Slot, Zero, One)

The simplest Nock operations are implemented directly within the memory traversal and execution modules:

Slot Operation (*[a 0 b]): Implemented by traversing the subject tree according to the address pattern specified by b. The implementation uses a bit-wise approach where each bit in the address determines whether to follow the head or tail pointer.

Constant Operations (*[a 1 b]): Simply returns the constant b regardless of the subject. This is implemented by writing the value of b directly to the result cell.

4.2.2 Tree Manipulation Operations

Operations that transform the tree structure are implemented through carefully orchestrated memory manipulations:

Evaluation (*[a 2 b c]): Constructs a new tree representing $^{*}[^{*}[a\ b]\ ^{*}[a\ c]]$, marking the appropriate cells for execution. This operation demonstrates the NockPU's approach to graph transformation, where complex Nock operations are implemented by restructuring memory to reflect the semantically equivalent expanded form.

Figure 3 illustrates the memory transformation process for Nock opcode 2, showing how the original nested structure is converted into separate evaluation branches. The transformation allocates new memory cells (addresses 0x09 and 0x0A) to represent the two evaluation paths $^{*}[a\ b]$ and $^{*}[a\ c]$, while preserving the original subject data at address 0x02. The execute bits (0x80 in the tag field) mark the newly created cells for evaluation, allowing the processor to continue the reduction process on the transformed structure.

This approach exemplifies the NockPU's philosophy of implementing complex operations through memory restructuring rather than traditional control flow. The deterministic nature of memory allocation ensures consistent behavior, while the tagging system provides the execution control necessary for proper evaluation sequencing.

Before: Memory State for
`*[[50 51] [2 [0 3] [1 [4 0 1]]]]`

Address	Tag Bits	Head	Tail
0x00	0x00	0x0000000	0x0000009
0x01	0x80	0x0000002	0x0000003
0x02	0x03	0x0000032	0x0000033
0x03	0x02	<u>0x0000002</u>	0x0000004
0x04	0x00	0x0000005	0x0000006
0x05	0x03	<u>0x0000000</u>	0x0000003
0x06	0x02	<u>0x0000001</u>	0x0000007
0x07	0x02	<u>0x0000004</u>	0x0000008
0x08	0x02	<u>0x0000000</u>	0x0000001

After: Memory State for
`*[*[[50 51] [0 3]] *[[50 51] [1 [4 0 1]]]]`

Address	Tag Bits	Head	Tail
0x00	0x00	0x0000000	0x0000009
0x01	0x80	0x0000009	0x000000A
0x02	0x03	0x0000032	0x0000033
0x03	0x02	<u>0x0000002</u>	0x0000004
0x04	0x00	0x0000005	0x0000006
0x05	0x03	<u>0x0000000</u>	0x0000003
0x06	0x02	<u>0x0000001</u>	0x0000007
0x07	0x02	<u>0x0000004</u>	0x0000008
0x08	0x02	<u>0x0000000</u>	0x0000001
0x09	0x80	0x0000002	0x0000005
0x0A	0x80	0x0000002	0x0000006

- Key:**
- **Bold values:** Data atoms (direct values like 50, 51, 3, 1)
 - Underlined values: Opcodes (Nock operation codes like 2, 0, 4)
 - Normal values: Pointers to other memory locations
 - Grayed cells : Memory address that have been modified

Figure 3: Memory transformation for Nock opcode 2 (Evaluation) demonstrating the conversion from opcode structure to evaluation branches, showing how `*[a 2 b c]` becomes `*[*[a b] *[*[a c]]]` through memory graph restructuring.

540 **Cell Testing** (*[a 3 b]): Examines whether the result of
 541 *[a b] is a cell, returning the appropriate truth value.

542 **Increment** (*[a 4 b]): Increments the result of *[a b] by
 543 one, using specialized logic.

544 **Equality** (*[a 5 b c]): Compares the results of *[a b]
 545 and *[a c] for equality.

546 4.2.3 Conditional Operation Implementation

547 The conditional operation (*[a 6 b c d]) is particularly chal-
 548 lenging due to its branching nature. In the NockPU, it is im-
 549 plemented by constructing the equivalent expression

550 *[a *[[c d] 0 *[2 3] 0 *[a 4 4 b]]]]

551 directly in memory.

552 This approach, while computationally expensive, main-
 553 tains semantic equivalence with the Nock specification and
 554 demonstrates how even complex operations can be expressed
 555 through graph transformation rather than traditional control
 556 flow.

557 4.2.4 Composition, Push, and Call Operations

558 Operations 7, 8, and 9 share a common implementation pat-
 559 tern in the NockPU: they perform graph reduction by writing
 560 the equivalent expanded expression directly into memory, then
 561 rely on the normal execution order to evaluate the result cor-
 562 rectly.

563 **Composition** (*[a 7 b c]): The NockPU writes the graph
 564 reduction *[*[a b] c] directly into memory. The normal ex-
 565 ecution order ensures that *[a b] is evaluated first, with its
 566 result becoming the subject for the subsequent evaluation of c.

567 **Push** (*[a 8 b c]): Implemented by writing the expan-
 568 sion *[[*[a b] a] c] into memory. The execution system
 569 constructs a cell containing both the result of *[a b] and the
 570 original subject a, creating the augmented context needed for
 571 evaluating c.

572 **Call** (*[a 9 b c]): Constructs the graph reduction *[*[a
 573 c] 2 [0 1] 0 b] in memory. This creates the function call

frame structure, with normal execution order ensuring proper evaluation sequence: first $*[a \ c]$ to obtain the function, then the constructed evaluation context.

This unified approach eliminates the need for specialized control flow logic in hardware. Instead, the NockPU leverages its graph reduction capabilities and the inherent ordering properties of the traversal mechanism to achieve correct execution semantics for all three operations.

4.2.5 Edit Operation Implementation

The edit operation ($*[a \ 10 \ [b \ c] \ d]$) performs tree modification through the specialized Edit Block module. This operation implements the tree editing function $\#[b \ *[a \ c] \ *[a \ d]]$, which modifies the tree structure at address b by replacing the value with the result of $*[a \ c]$ and continuing evaluation with $*[a \ d]$.

The Edit Block uses careful pointer manipulation to modify tree structures while preserving shared subtrees and maintaining memory consistency. This operation requires sophisticated address calculation and memory management to ensure that tree modifications do not corrupt other parts of the computation.

4.2.6 Hint Operation Implementation

The hint operation ($*[a \ 11 \ [b \ c] \ d]$) provides optimization opportunities by transforming to $*[[*[a \ c] \ *[a \ d]] \ 0 \ 3]$. While semantically equivalent to its expansion, hints in the NockPU architecture are designed to enable hardware-specific optimizations or jetting.

The current implementation constructs the hint structure in memory and proceeds with standard evaluation. However, the architecture includes provisions for recognizing specific hint patterns that could be accelerated through specialized hardware modules or optimized execution paths, representing a key area for future performance improvements.

607 4.3 Memory Management

608 4.3.1 Heap Allocation Strategy

609 The NockPU employs a heap-based memory allocation strat-
 610 egy. A free memory chain links together all available memory
 611 cells, and operations claim cells from this chain as needed. The
 612 free memory pointer (F) tracks the next available cell.

613 This approach allows for dynamic allocation without re-
 614 quiring complex memory management hardware, albeit at the
 615 cost of potential fragmentation over time.

616 4.3.2 Memory Access Patterns

617 The memory architecture is designed to optimize the prevalent
 618 access patterns in Nock execution:

- 619 1. **Cell-Based Memory Model:** Each memory word rep-
 620 represents a complete cell containing both head and tail
 621 components within the 64-bit word structure. Single
 622 atoms are represented as cells [a NIL], where NIL is the
 623 maximum direct atom value (28-bits).
- 624 2. **Parallel Memory Operations:** The design allows up to
 625 three memory operations per processor cycle: two reads
 626 and one write, enabling efficient traversal and manipu-
 627 lation of tree structures.
- 628 3. **Memory Management Unit (MMU):** The NockPU is
 629 shielded from off-chip memory complexity through an
 630 MMU that handles the translation between the proces-
 631 sor's cell-based addressing and the underlying memory
 632 hierarchy.

633 5 Evaluation and Analysis

634 The NockPU evaluation encompasses both functional veri-
 635 fication and performance analysis to assess the viability of
 636 hardware-based Nock execution. Testing methodology fo-
 637 cuses on semantic equivalence validation through comparison

with reference implementations, while performance analysis examines execution characteristics, memory usage patterns, and computational complexity across representative benchmark programs. The evaluation identifies both the capabilities and limitations of the current implementation, providing a foundation for understanding the tradeoffs inherent in hardware combinator reduction.

5.1 Test Methodology

5.1.1 Test Bench Design

A comprehensive test bench was developed to evaluate the NockPU's functionality and performance. The test bench allows for loading different Nock programs into memory, executing them, and analyzing the results.

The testing framework includes:

- Memory initialization from hex files
- Execution control and timing
- Result validation
- Performance measurement through cycle counting

5.1.2 Operation Verification

Each Nock operation was verified through specific test cases designed to exercise different aspects of its functionality. Waveform analysis allowed for detailed examination of the processor's behavior during execution, ensuring correctness and identifying potential optimization opportunities.

5.2 Performance Metrics

Performance benchmarking of the NockPU was conducted using representative Nock operations that exercise different aspects of the hardware architecture. The test configuration utilized a total memory allocation of 2048 words, split equally between active and garbage collection spaces (1024 words each),

running at a 50MHz clock frequency. This memory constraint significantly impacts performance characteristics due to the frequency of garbage collection cycles required during computation.

The benchmark suite encompasses operations ranging from simple arithmetic to complex recursive functions, providing insight into the computational complexity of hardware-based combinator reduction. Table 2 presents comprehensive performance data for these representative operations, demonstrating the relationship between computational complexity and execution time in the NockPU architecture.

Table 2: NockPU Performance Metrics: clock of 50MHz and 16,384 bytes of memory

Operation	Input	Cycles	Time
Decrement	n=3	32,640	652.8 μ s
Decrement	n=10	110,137	2.20 ms
Ackermann	A(1,2)	1,214,348	24.29 ms
Ackermann	A(1,3)	1,782,038	35.64 ms
Ackermann	A(2,1)	3,266,189	65.32 ms
Ackermann	A(2,2)	6,533,725	130.67 ms
Equality	*[50 5 [0 1] 0 1]	406	8.12 μ s
Equality	*[[99 99] 5 [0 1] 0 1]	479	9.58 μ s
Addition	(add 2 2)	116,310	2.33 ms
Addition	(add 4 4)	253,917	5.08 ms
Slot	Depth 3	164	3.27 μ s
Slot	Depth 7	156	3.12 μ s

The benchmark results reveal several key performance characteristics of the NockPU architecture. Simple operations such as equality testing complete in hundreds of cycles, while complex recursive operations like the Ackermann function require millions of cycles due to extensive intermediate structure creation. The 1024-word memory constraint creates a distinctive “step function” behavior in the computational complexity analysis: when operations exceed available memory, garbage collection cycles introduce significant overhead, causing performance to degrade in discrete steps rather than smooth progression.

This memory-bounded performance profile is particularly

evident in recursive operations, where the combination of exponential intermediate structure growth and periodic garbage collection creates compound performance effects. The deterministic nature of the architecture ensures consistent timing for identical operations, but the interplay between memory consumption and collection cycles makes performance prediction dependent on both algorithmic complexity and memory utilization patterns. These characteristics distinguish the NockPU's performance profile from traditional architectures, where performance typically scales more predictably with computational complexity.

5.3 Limitations and Challenges

5.3.1 Memory Consumption Issues

The most significant limitation initially encountered was excessive memory consumption due to the creation of intermediate structures during reduction. Early testing revealed that even moderately complex programs would quickly exhaust available memory without proper memory management.

For instance, a decrement operation on the number 10 would crash the system due to memory exhaustion. This limitation led to the implementation of the Cheney-style copying garbage collector described in Section 3.4.5, which successfully addresses these memory management challenges by reclaiming unreachable intermediate structures and maintaining system stability during complex computations.

5.3.2 Performance Bottlenecks

Several performance bottlenecks were identified:

1. **Memory Access Latency:** Particularly when using off-chip memory, which is significantly slower than on-chip memory.
2. **Sequential Reduction:** The inherently sequential nature of certain reduction patterns limits parallelism.

- 722 3. **Tree Traversal Overhead:** The need to navigate com-
723 plex tree structures introduces overhead compared to di-
724 rect operations.

725 5.3.3 Conditional Operation Overhead

726 The implementation of the conditional operation (`*[a 6 b c`
727 `d]`) proved particularly inefficient due to its expression as a
728 complex tree transformation rather than a simple branch. This
729 approach, while semantically pure, introduces significant over-
730 head compared to traditional conditional execution.

731 6 Future Work

732 6.1 Arbitrary-size Atom Support

733 While the current implementation supports 28-bit atoms, sup-
734 porting arbitrarily large atoms is necessary for full Nock com-
735 patibility. The proposed implementation uses a structured ap-
736 proach where large atoms are represented as follows:

- 737 • **Header Cell:** The head contains the length of the large
738 atom, while the tail serves as workspace for the inter-
739 preter
- 740 • **Data Storage:** The address immediately following the
741 header contains the first 64 bits of the large atom in little-
742 endian format, with subsequent addresses containing ad-
743 ditional 64-bit segments as needed

744 This design requires specific modifications to atom-
745 manipulating operations:

- 746 1. **Increment Operation:** Must reallocate the entire large
747 atom and perform increment with carry propagation
748 across all 64-bit segments, ensuring proper handling of
749 size changes when carries extend the atom length.
- 750 2. **Comparison Operations:** Equality testing must tra-
751 verse the complete atom representation, comparing both
752 length and all data segments to ensure accurate results.

753 **3. Garbage Collection:** The existing Cheney-style col-
754 lector can handle large atoms naturally by copying the
755 header and all associated data segments during the copy-
756 ing phase, with no fundamental changes to the collection
757 algorithm.

758 The memory allocation system remains unchanged, as large
759 atoms are allocated as contiguous blocks following the header
760 cell.

761 6.2 Hardware Jetting Strategy

762 "Jetting" refers to the replacement of inefficient Nock code pat-
763 terns with optimized implementations. A promising approach
764 for hardware jetting involves using a secondary processor that:

- 765 1. Detects specific patterns in the Nock code
- 766 2. Executes optimized hardware implementations
- 767 3. Returns results to the main NockPU

768 This hybrid approach could dramatically improve performance
769 for common operations while maintaining semantic equiva-
770 lence with pure Nock.

771 7 Discussion and Implications

772 7.1 Theoretical Implications for Computer Architecture

773 The NockPU project provides insights into the relationship be-
774 tween computation models and hardware architecture. Tra-
775 ditional von Neumann architectures are optimized for imper-
776 ative, state-based computation, while the NockPU represents
777 an approach tailored for functional, stateless computation.

778 This work suggests that specialized architectures for spe-
779 cific computational paradigms may offer advantages over
780 general-purpose solutions in certain contexts. The NockPU's
781 design choices, such as the stackless traversal mechanism and
782 integrated garbage collection, illustrate how hardware can be

adapted to better support the patterns inherent in combinator reduction.

7.2 Practical Applications

7.2.1 Low-power Computing

The deterministic nature of Nock, combined with the potential power efficiency of specialized hardware, suggests applications in low-power computing environments where predictability is valued over raw performance.

Preliminary analysis suggests that a dedicated NockPU could offer significant power efficiency advantages over general-purpose CPUs running Nock interpreters. The specialized nature of the architecture eliminates much of the overhead associated with general-purpose instruction decoding, branch prediction, and speculative execution. Additionally, the deterministic execution model prevents the power consumption variability that characterizes modern CPUs with dynamic frequency scaling and complex power management.

Future work should include comprehensive power analysis and optimization of the architecture for low-power operation, particularly focusing on minimizing memory access energy and optimizing the garbage collection process for power efficiency.

7.2.2 Verifiable Computing

The simplicity and determinism of the NockPU architecture could make it easier to formally verify than complex general-purpose CPUs, opening possibilities for applications requiring high assurance of correctness.

The limited instruction set, deterministic execution model, and absence of speculative execution or complex branch prediction reduce the verification burden compared to modern processors. Applications in safety-critical systems, cryptographic processing, or environments requiring audit trails could benefit from this simplified verification process. However, the practical deployment of such systems would need to

817 balance the verification advantages against the performance
818 limitations inherent in the current implementation.

819 7.3 Comparison with Traditional Architectures

820 When compared to traditional CPU architectures, the NockPU
821 reveals fundamental tradeoffs:

- 822 1. **Performance vs. Simplicity:** The NockPU sacrifices
823 raw performance for semantic clarity and simplicity.
- 824 2. **Flexibility vs. Specialization:** General-purpose CPUs
825 offer flexibility across computing paradigms, while the
826 NockPU is specialized for combinator reduction.
- 827 3. **Memory Efficiency vs. Semantic Purity:** The
828 NockPU's approach to computation requires more mem-
829 ory operations than optimized imperative code.

830 These tradeoffs suggest that the NockPU and similar architec-
831 tures may find their niche in specialized applications rather
832 than general-purpose computing.

833 8 Conclusion

834 The NockPU project has successfully demonstrated the fea-
835 sibility of implementing the Nock combinator calculus di-
836 rectly in hardware, providing concrete architectural solutions
837 for functional computation while identifying the fundamental
838 challenges inherent to combinator reduction.

839 This work presents a complete hardware implementation
840 of Nock using established techniques adapted for combina-
841 tor reduction. The stackless tree traversal mechanism en-
842 ables efficient navigation of Nock's recursive tree structures
843 without external stack management. The cell-based memory
844 representation optimizes 64-bit words for Nock's binary tree
845 structures, with 28-bit nouns and 8 tag bits providing efficient
846 metadata management. The integration of Cheney-style copy-
847 ing garbage collection directly into the processor architecture

demonstrates that memory management can be successfully embedded as a hardware feature rather than remaining a software concern.

The research identifies two primary challenges to efficient hardware Nock execution: excessive memory consumption due to intermediate structure creation from combinator reduction, and computational complexity arising from the graph transformation approach required by Nock’s semantic model. The first challenge is successfully addressed through the implemented garbage collector, which prevents system crashes and maintains stability during complex computations. The second remains an area for future optimization.

The implementation demonstrates that all twelve Nock operations can be realized in hardware through graph reduction techniques, establishing a complete foundation for Nock computation. While computational efficiency remains challenging, the core architectural approach—particularly the integration of garbage collection and cell-based memory management—provides a viable foundation for specialized functional computation that offers advantages in determinism and semantic clarity over general-purpose architectures.

References

- Burrows, E. (2009). “A Combinator Processor.” In: *Part II Computer Science Tripos*.
- Clark, Douglas W. (1976). “An Efficient List-Moving Algorithm Using Constant Workspace.” In: *Communications of the ACM* 19.6, pp. 352–354. DOI: 10.1145/360238.360249.
- Clarke, T. J. W. et al. (1980). “SKIM—The S, K, I Reduction Machine.” In: *Proceedings of the 1980 ACM Conference on LISP and Functional Programming*. New York, NY, USA: ACM, pp. 128–135. DOI: 10.1145/800087.802799.
- Naylor, Matthew (2009). “Hardware-Assisted and Target-Directed Evaluation of Functional Programs.” PhD thesis. York, UK: University of York.

- 883 Naylor, Matthew and Colin Runciman (2008). "The Reduceron:
884 Widening the von Neumann Bottleneck for Graph
885 Reduction Using an FPGA." In: *Implementation and*
886 *Application of Functional Languages*. Vol. 5083. Lecture
887 Notes in Computer Science. Springer, pp. 129–146.
- 888 Norman, A. C., T. J. W. Clarke, and W. R. Stoye (1984). "Some
889 Practical Methods for Rapid Combinator Reduction." In:
890 *Proceedings of the 1984 ACM Symposium on LISP and*
891 *Functional Programming*. New York, NY, USA: ACM,
892 pp. 159–166. DOI: 10.1145/800055.802036.
- 893 ~sorreg-namtyv, Curtis Yarvin (2013) "Nock 4K". URL:
894 [https://docs.urbit.org/language/nock/reference/](https://docs.urbit.org/language/nock/reference/definition)
895 [definition](https://docs.urbit.org/language/nock/reference/definition) (visited on ~2024.2.20).
- 896 ~sorreg-namtyv, Curtis Yarvin et al. (2016). *Urbit: A*
897 *Solid-State Interpreter*. Whitepaper. Tlon Corporation. URL:
898 <https://media.urbit.org/whitepaper.pdf> (visited on
899 ~2024.1.25).