

# U·LINK



**UL-2BIR40M4-IP**

**2MP Full Color Bullet Camera Motorized Lens**

**POWERING THE FUTURE**



## Features

- Full Color Bullet Camera.
- 1/2.8" SONY Starvis Back-illuminated CMOS Sensor.
- H.265+/H.265/H.264+/H.264 Compression Method.
- 2.7-13.5mm Motorized Lens.
- IR distance 40m.
- With Internal POE & SD Card Slot.

## Specification

### Camera

Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
Resolution	2MP 1080P
Effective Pixels	1945x1097
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec, NTSC 1/30-1/10000Sec
Minimum Illumination	0.005 Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
Reset Button	Yes

### Lens

Focus Length	2.7-13.5mm Motor Zoom
Focus Control	Auto
Lens Type	Auto
Pixels	2MP

## Night Vision

Infrared LED	Up To 40m
IR Status	Auto Control
IR Power On	Smart, Manual & Timed Mode

## Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, UDP
ONVIF	Support ONVIF 2.4 (Profile S/T/G)
P2P	Yes, Support QR Code
POE	IEEE 802.3af
Main Stream 1	2304x1296@25fps
Main Stream 2	1920x1080@30fps
Main Stream 3	1280x720@30fps
Sub Stream 1	1280x720@30fps - 720x480@30fps
Sub Stream 2	352x288@30fps
Tri Stream	1280x720@30fps - 720x480@30fps - 352x288@30fps
IE Browser	IE8-11, Google Chrome, Firefox, Mac Safari
Smart Phone	iPhone, iPad, Android, Android Pad

## AI Function

Intelligent Analysis	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection
----------------------	--

## Camera Features

Day/Night	Color/ B&W (IR-CUT )
Image Config	Saturation, Brightness, Contrast/Sharpness, Mirror, 3D NR, White Balance, FLK (Flicker Control), Video Tampering, HLC, Distortion
Full Color	Support
Corridor Pattern	Support
Defog Mode	Support
ROI	Support
BLC	Support
WDR	HDR: 120dB
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web
Language	English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Netherlands, Czech, Vietnamese

## Interface

Audio	1 Built-in MIC Audio Line In/Out
Alarm	1CH Input/Output
SD Card Slot	Internal, Support Max 512GB


## General


Housing	Metal ,IP67
Anti-Cut Bracket	No
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	Poe, DC12V±10%, 100mA
Dimension WxHxD	Φ268x95x88mm
Weight	1500g

## Technical Specifications

Material	Aluminum & SECC & PC
Color	White
Junction Box	B320

## Dimensions (mm)

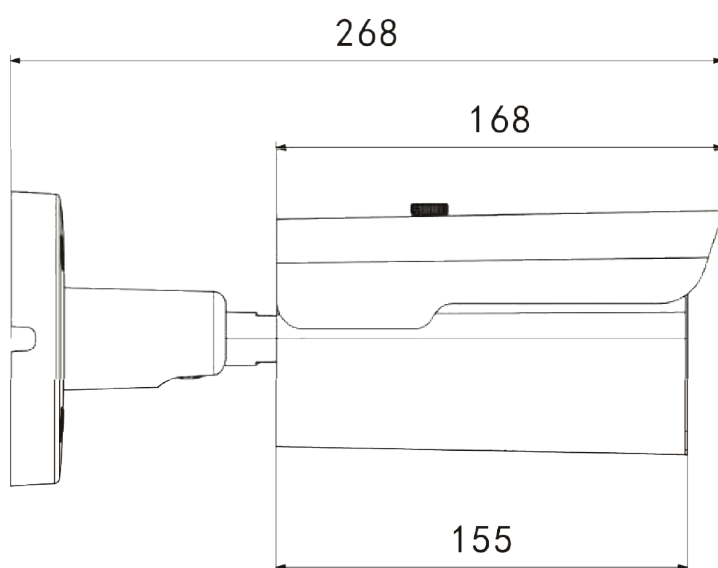

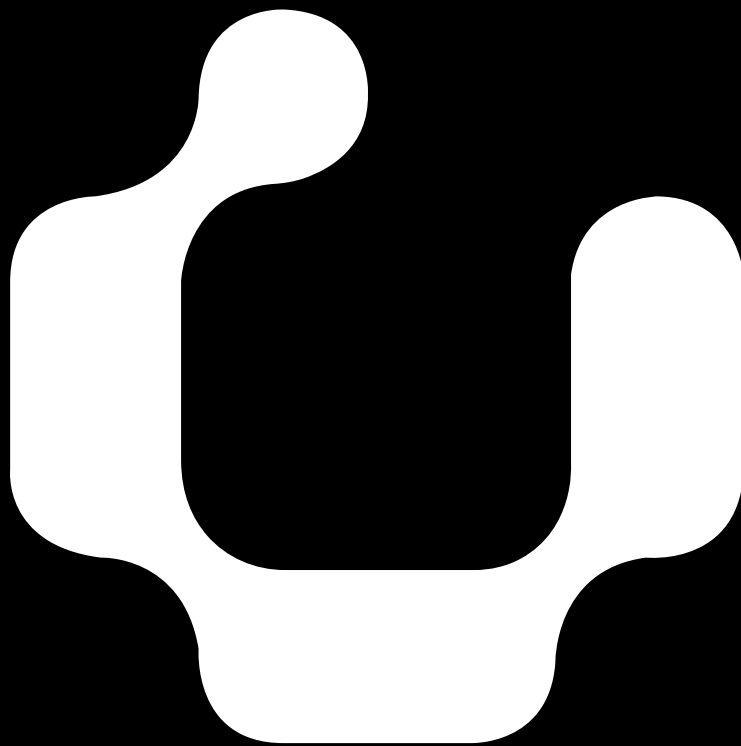

# U·LINK

**POWERING THE FUTURE**

**Email:**

[info@u-link.uk](mailto:info@u-link.uk)

**Address:**

Sydney House, 62 Lancaster Way, Ely,  
Cambridgeshire, CB6 3NW, UK

**Website:**

<https://u-link.uk>