

SPECIFICATIONS

Current Rating: 2A AC/DC

Voltage Rating: 100V AC/DC

Contact Resistance: 10m Ω Max

Insulation Resistance: 1000M Ω Min

Withstanding Voltage: 800V AC for 1 minute

Temperature Range: -25°C to +85°C


MATERIAL

Contact: Brass, Tin plated




Insulator: NY66, UL94V-0, White

ORDER INFORMATION



W 2007 R - XX



No. of Contacts	Dimensions	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

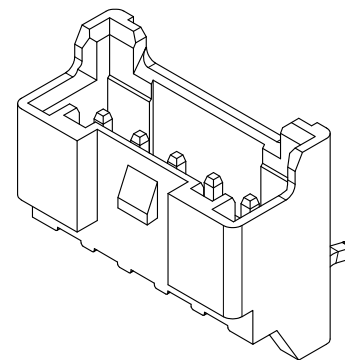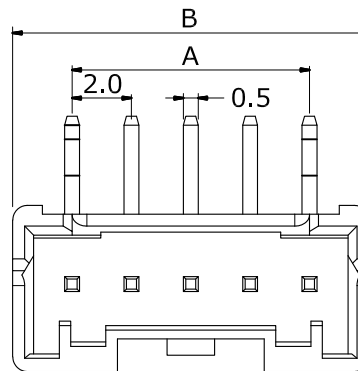

P.C.B LAYOUT

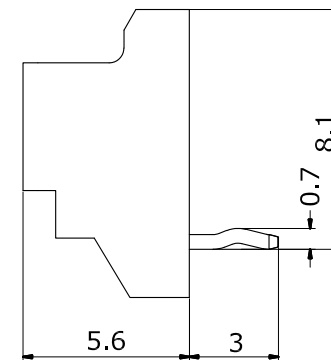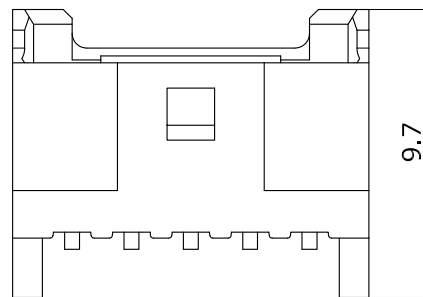

PART NO.	W2007R-XX	DRAWN	Andrew
DRAWING NO.	W2007R-XX	CHECKED	Claudia
DATE	2022/05/05	APPROVED	Brian

TITLE:	REV.	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.	DESCRIPTION	DATE
--------	------	-----------	-----------------------	-------	-----	------	----	-----	-------------	------