




SH4, SH5 bypass U40 and U41 when Vin is a single source (Adapter or POE)

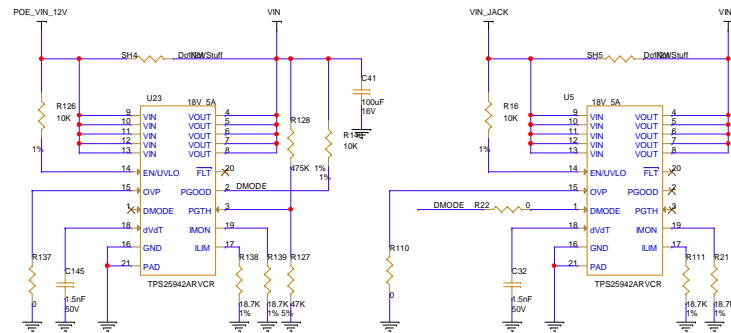



3V3/6A powers the M.2 and Mini-PCIe modules

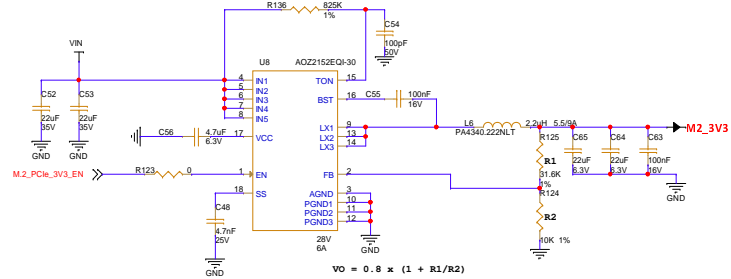

5V/6A powers the SOM and USB power out

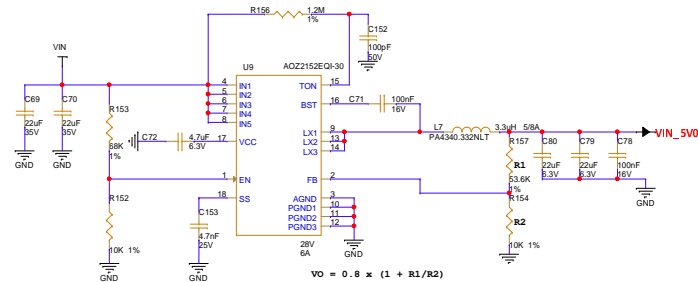


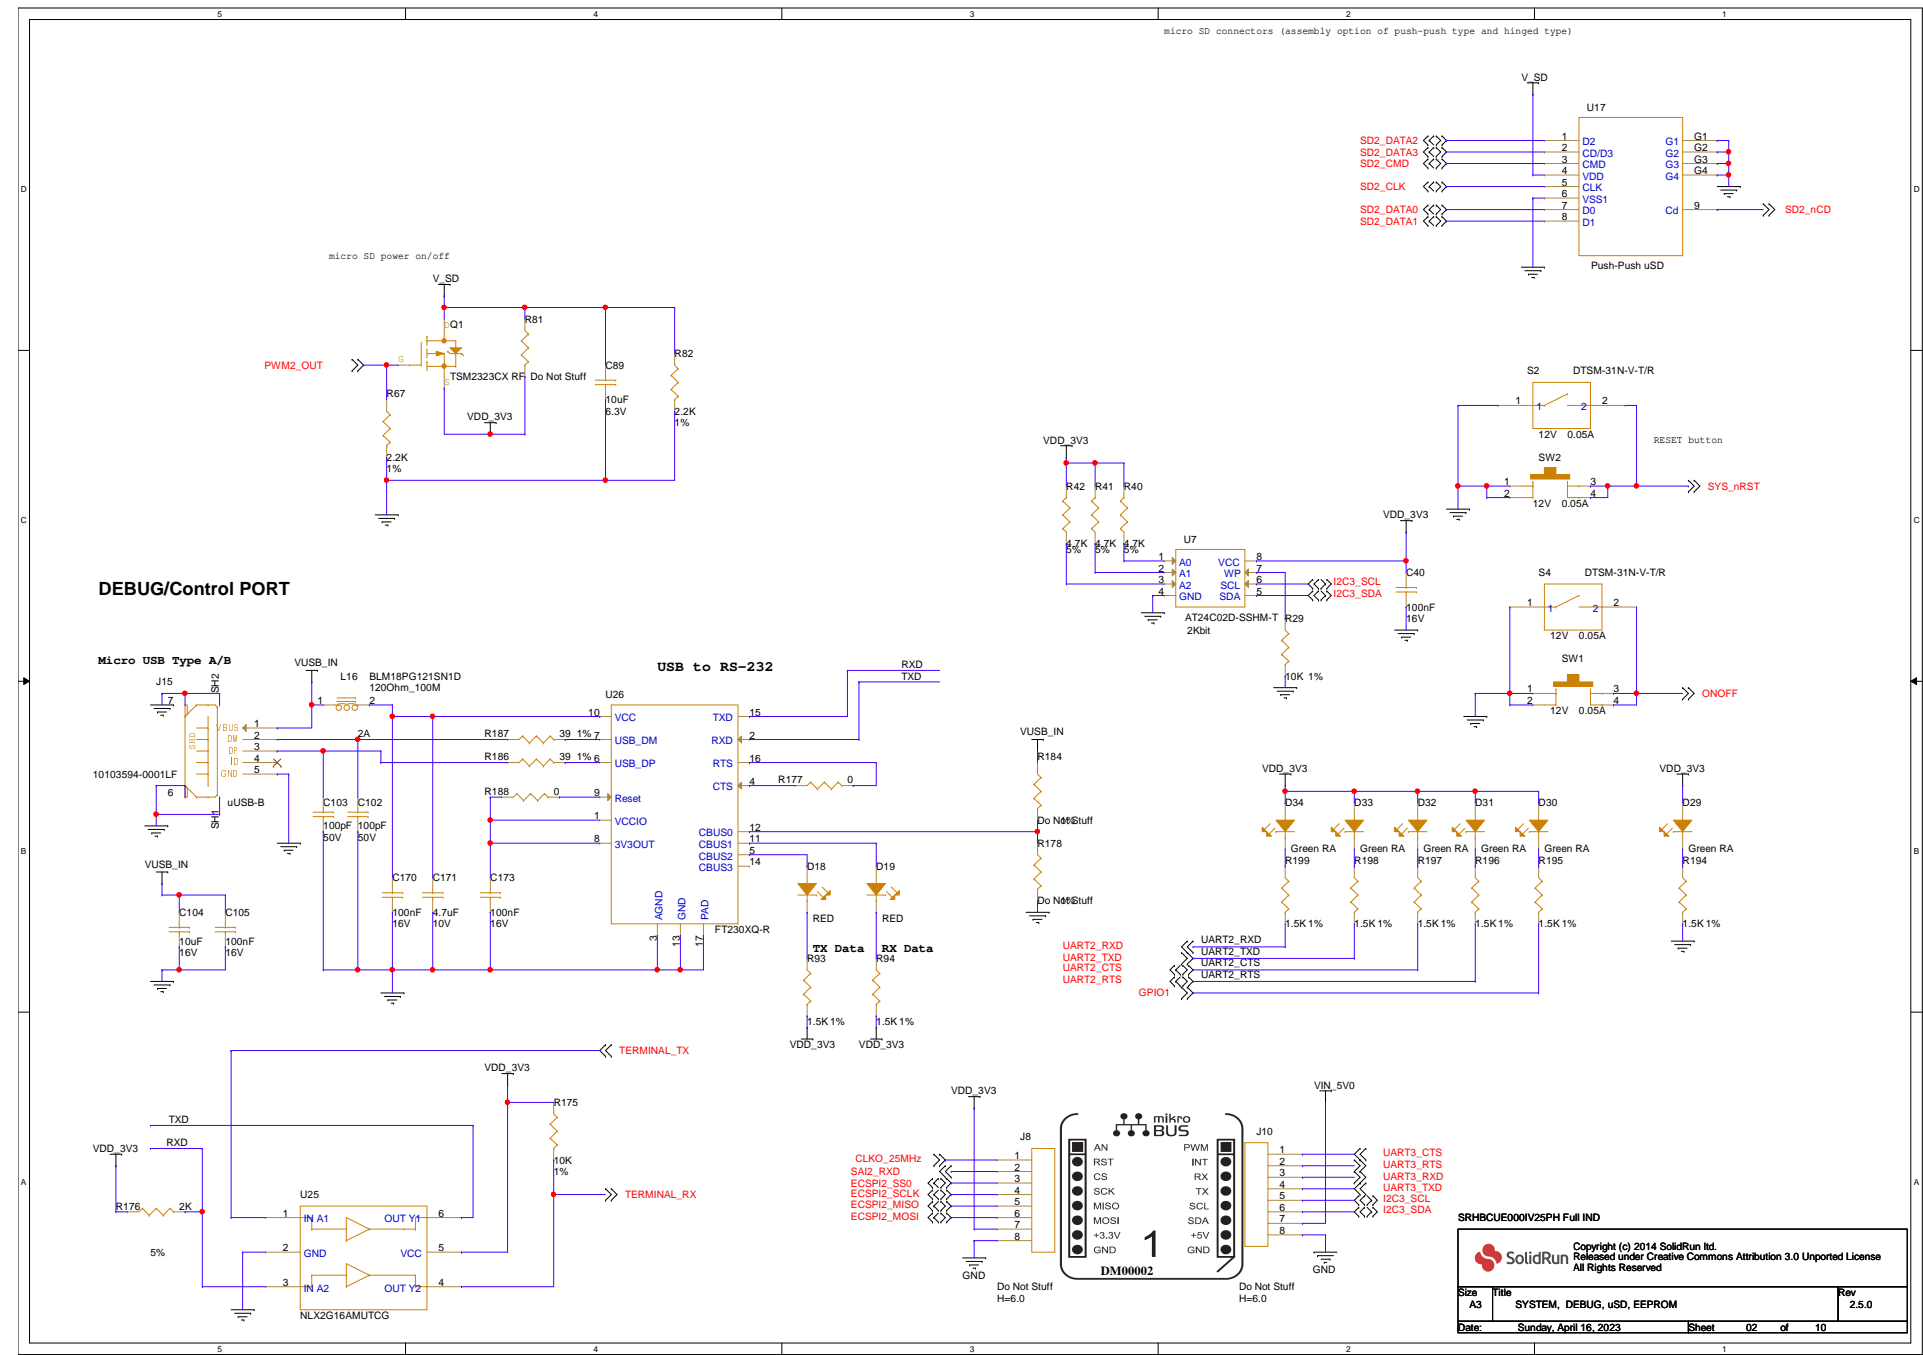


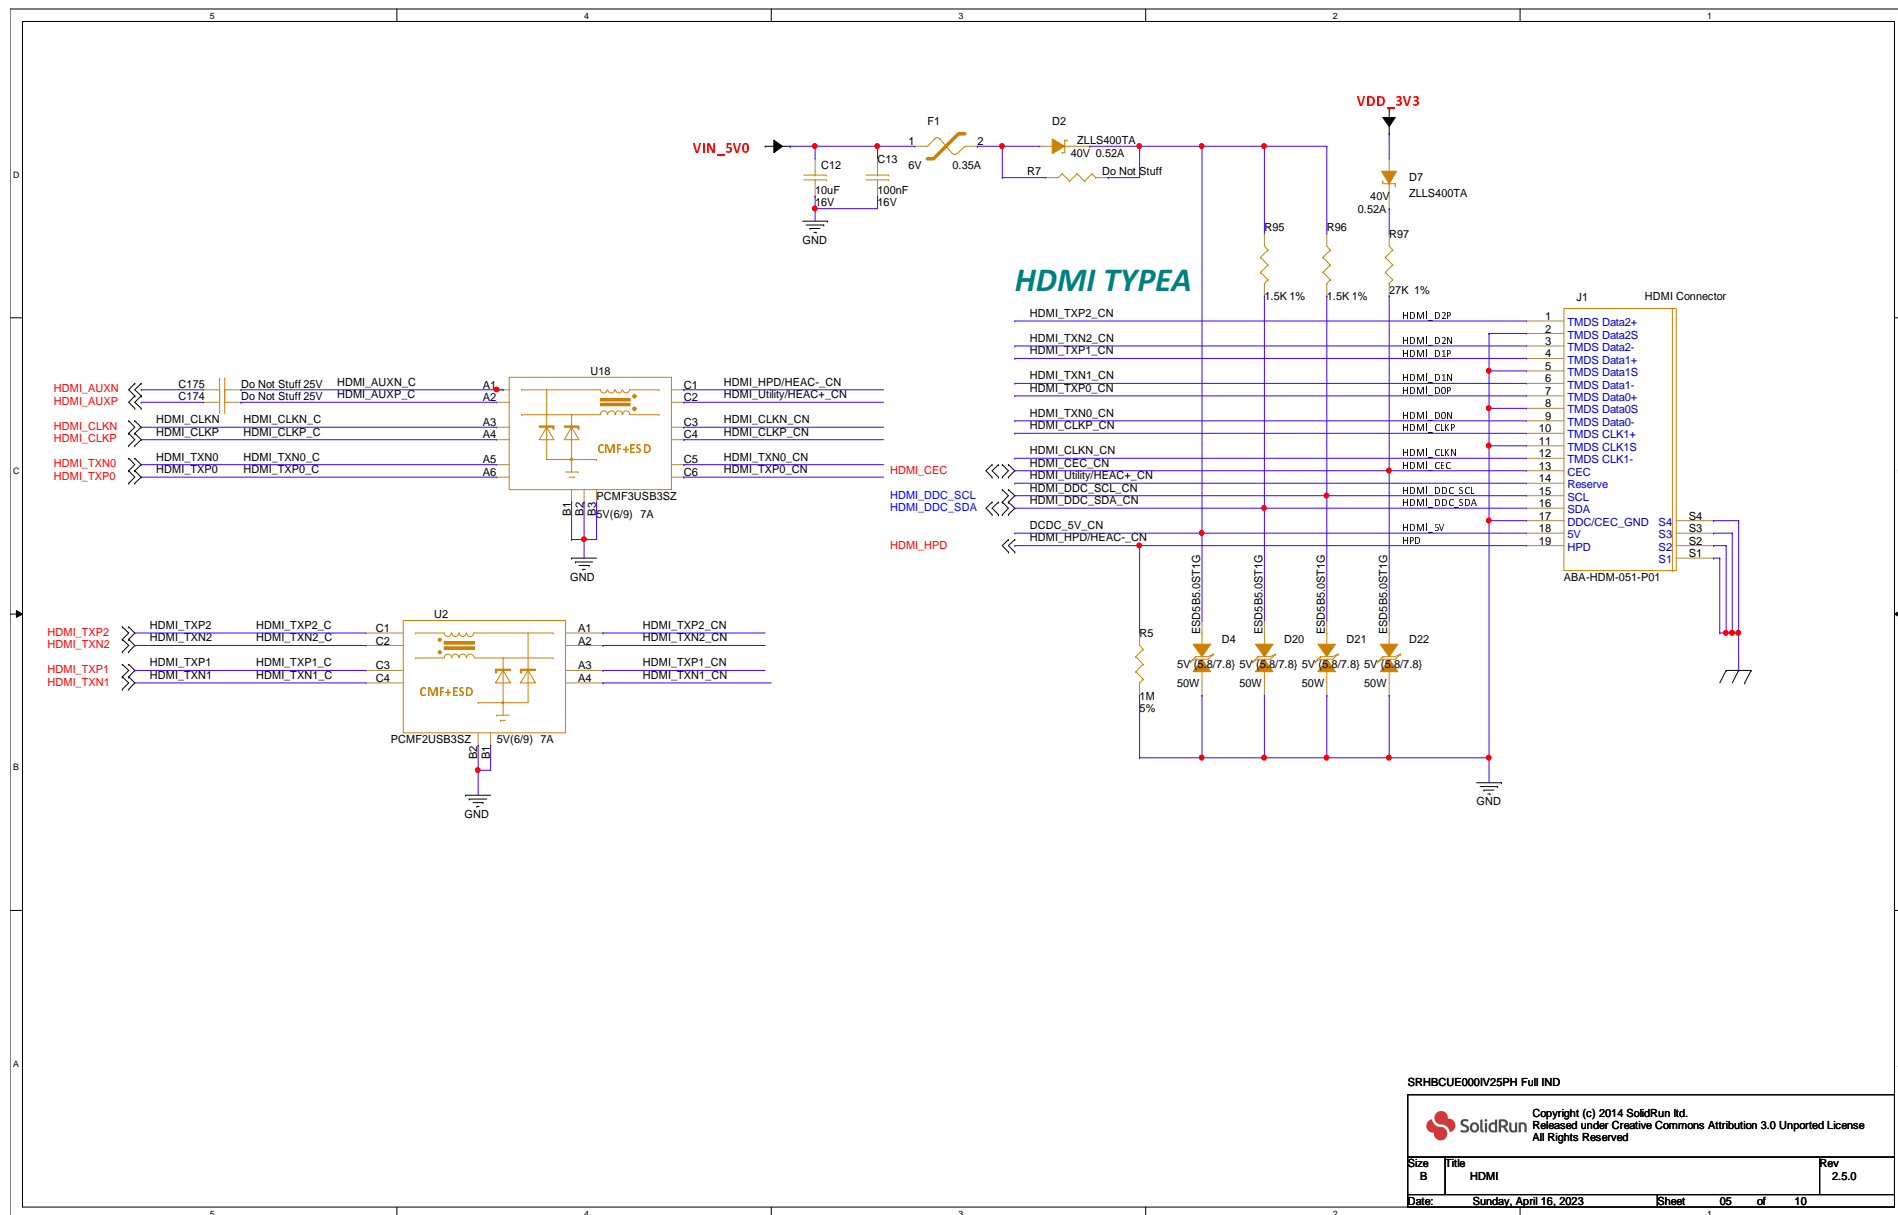









HP JACK 3.5mm




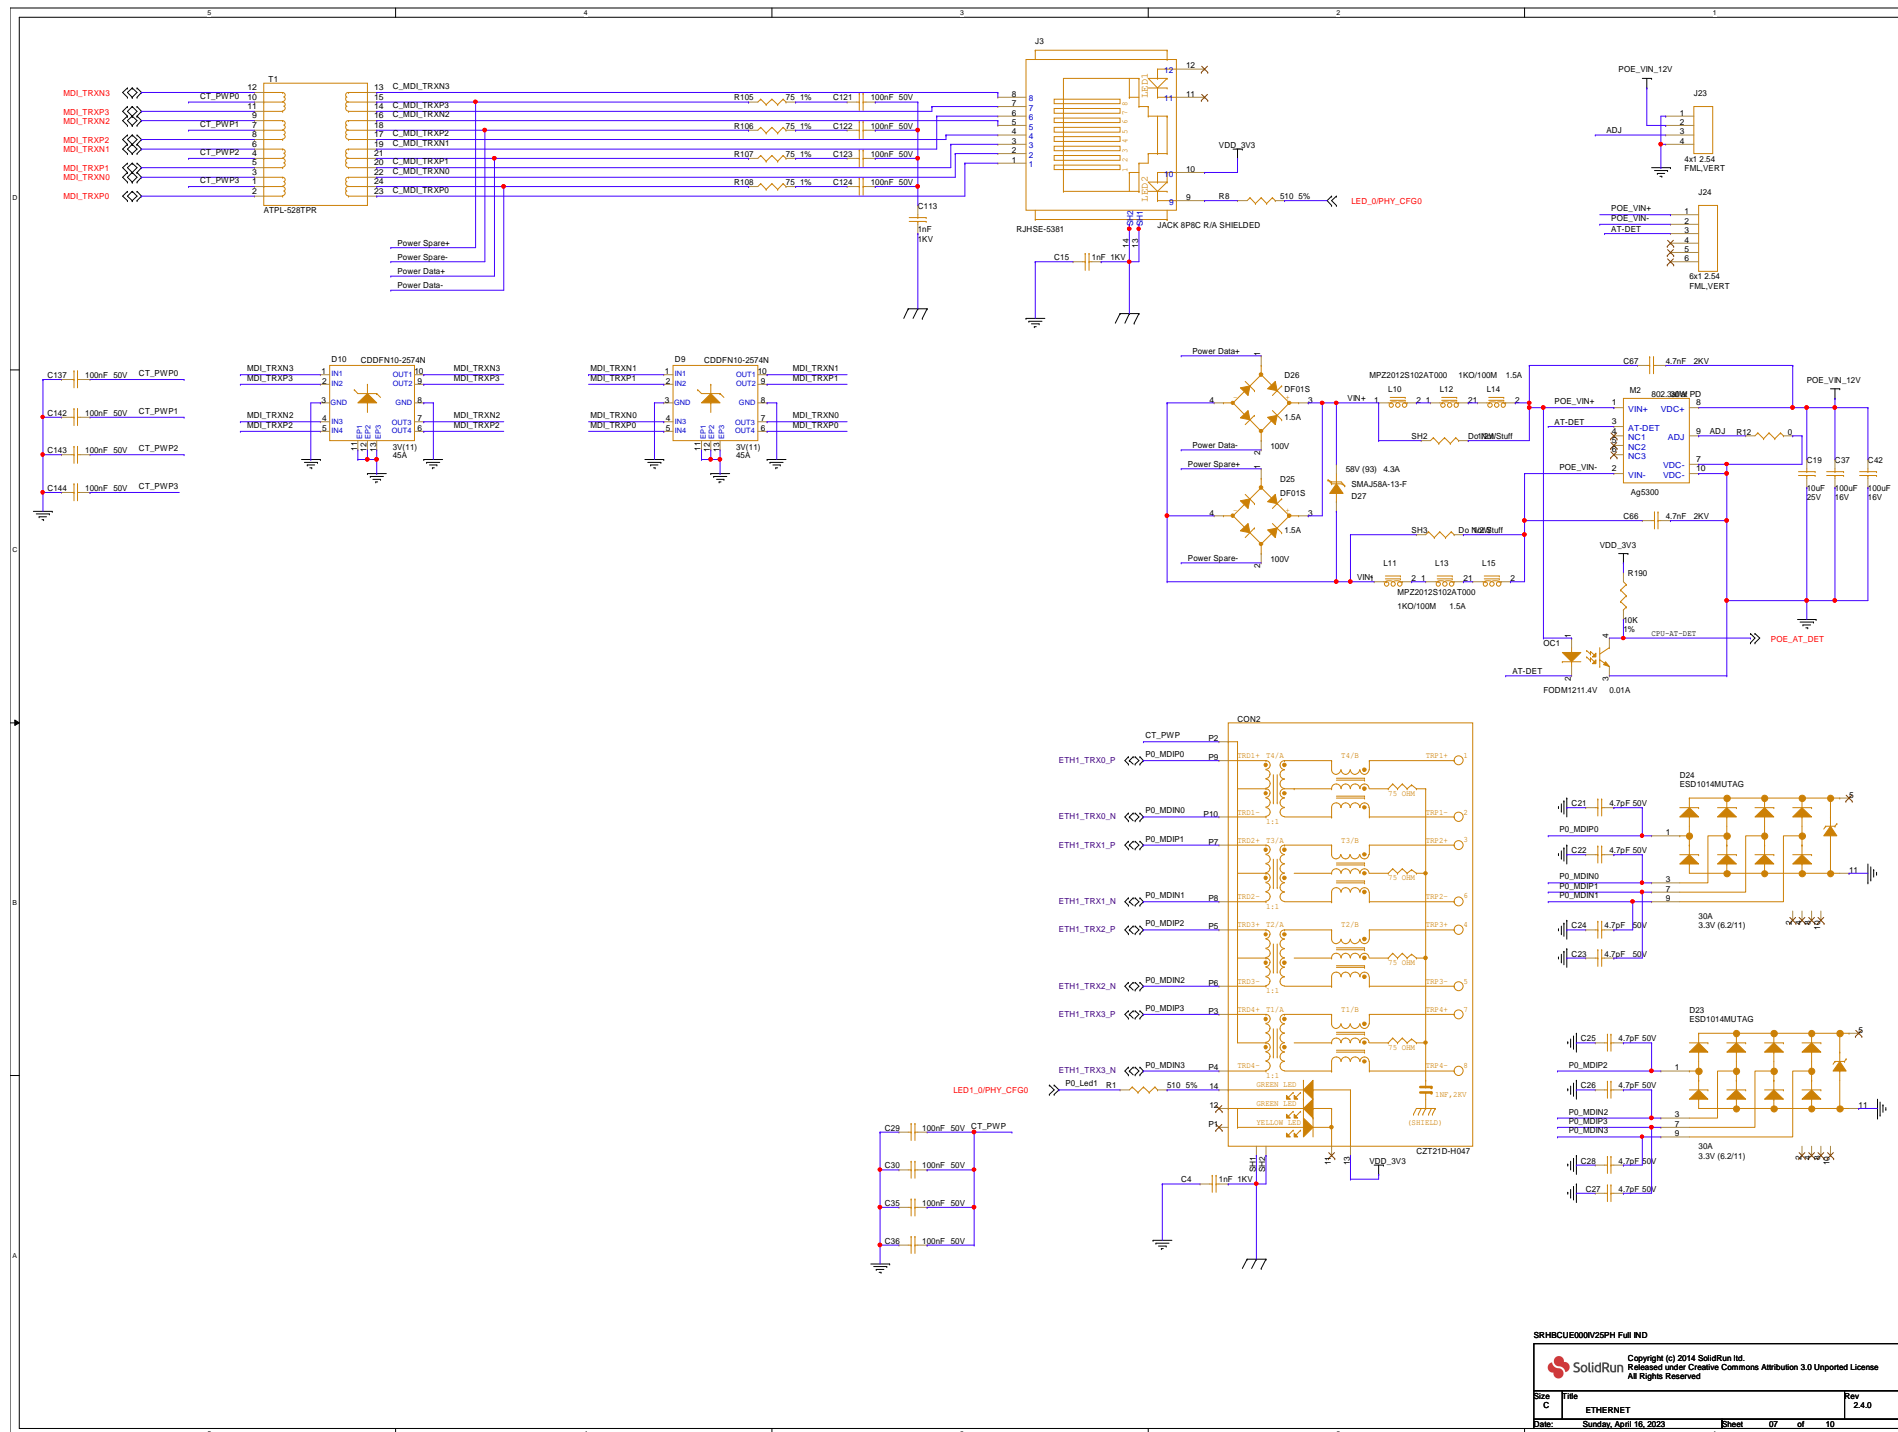

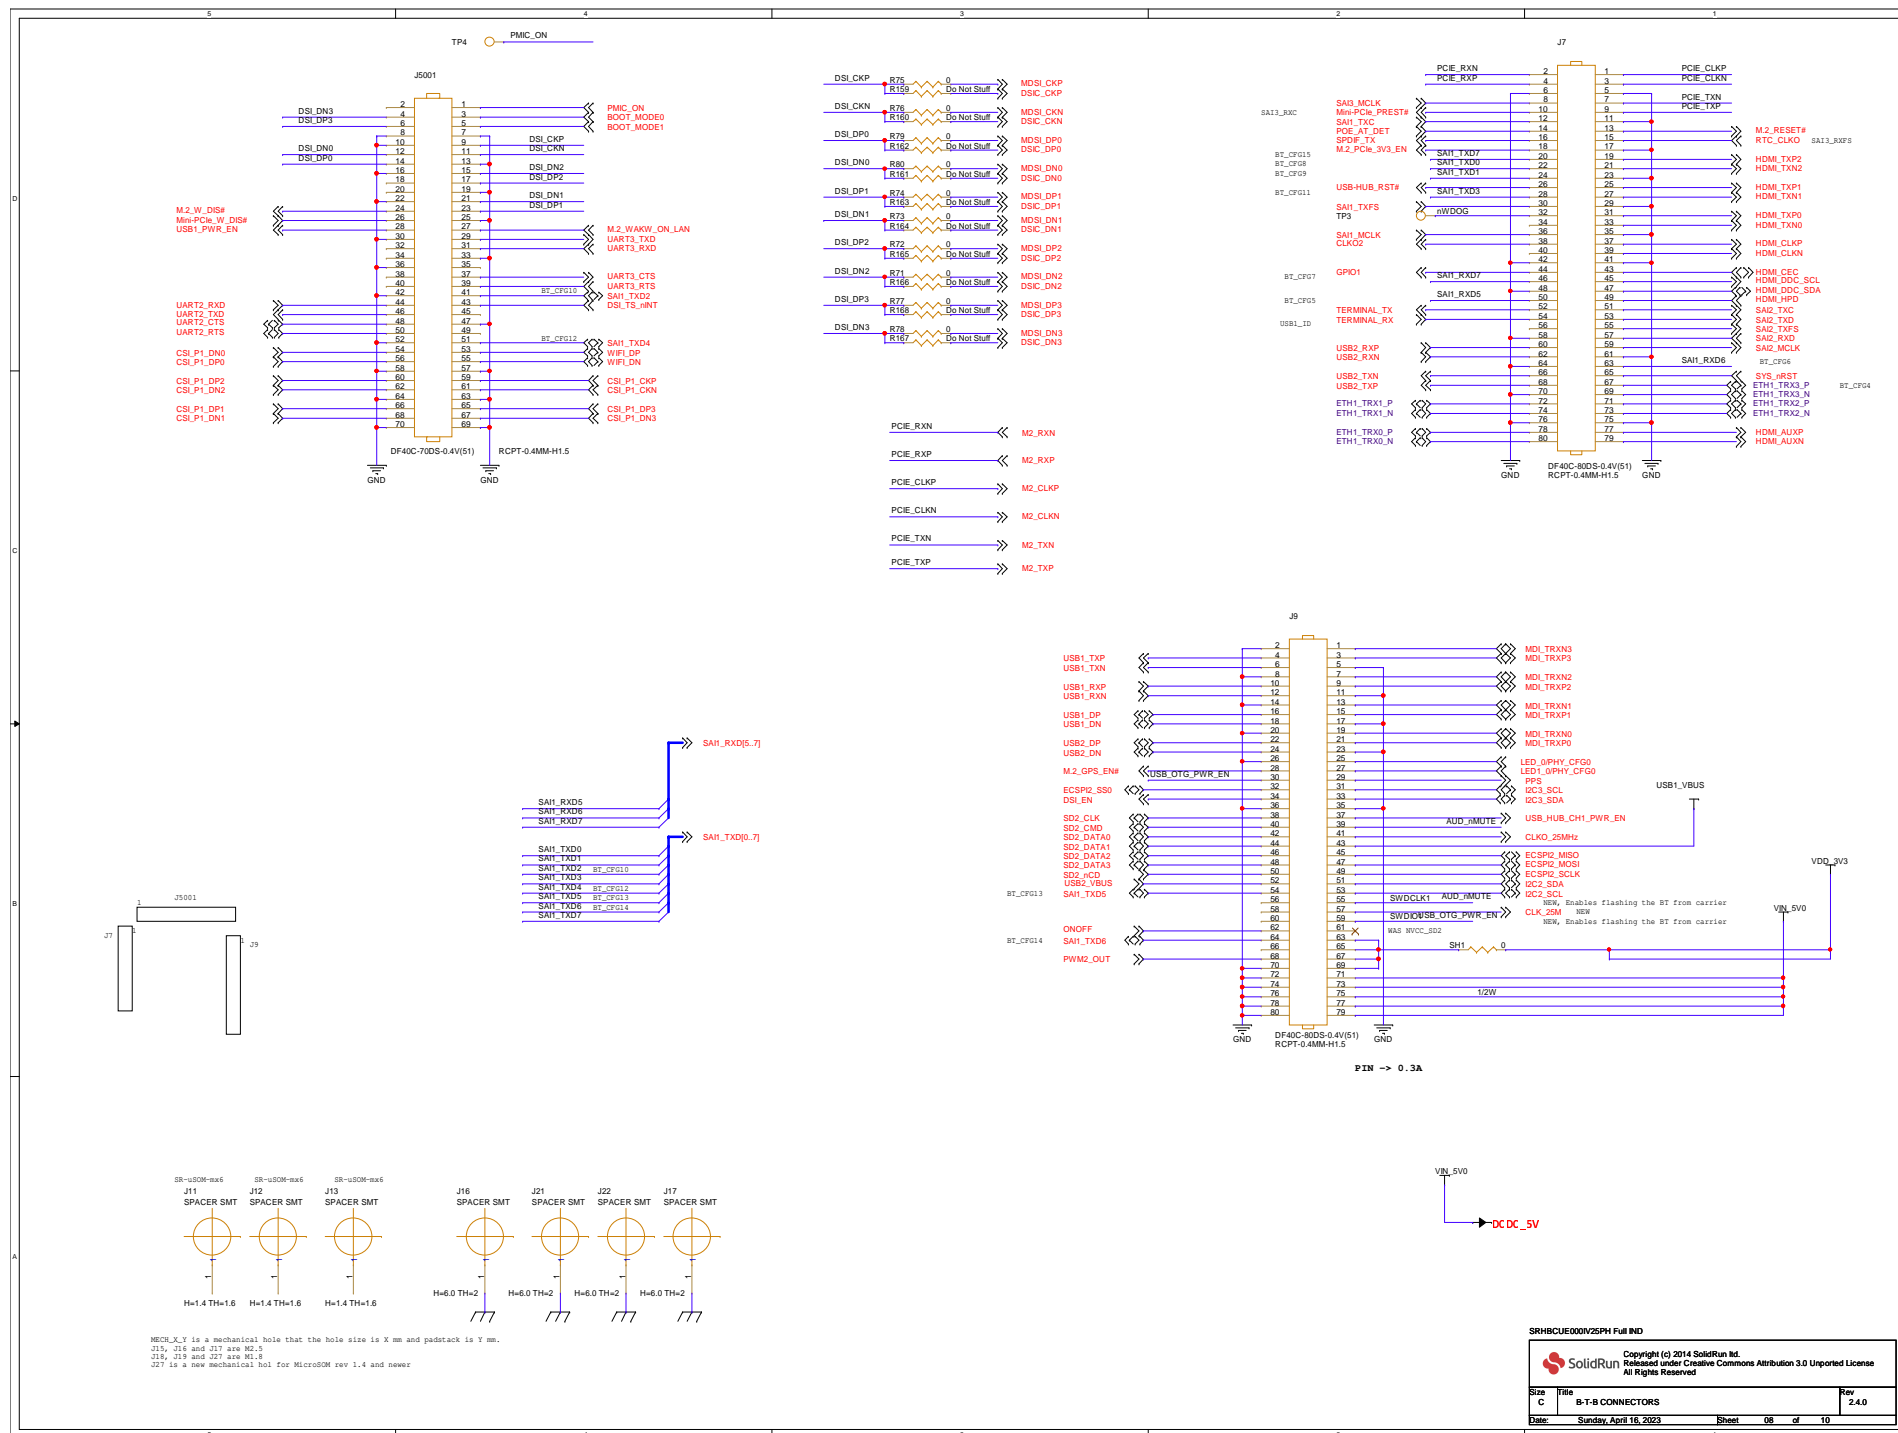

EXP CN

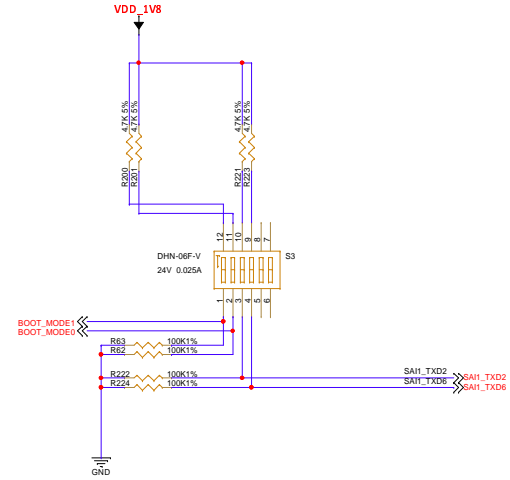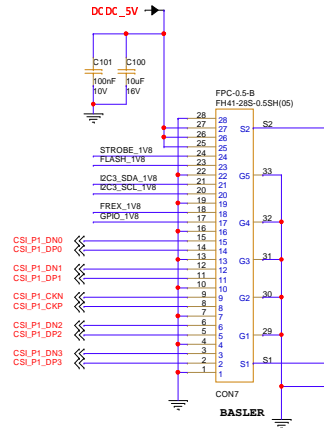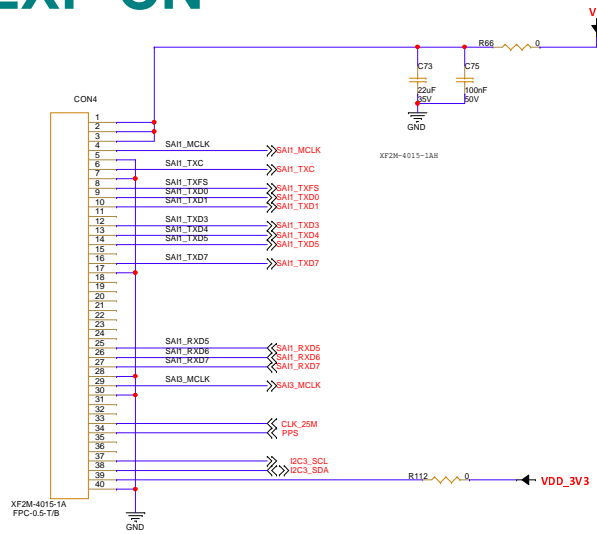

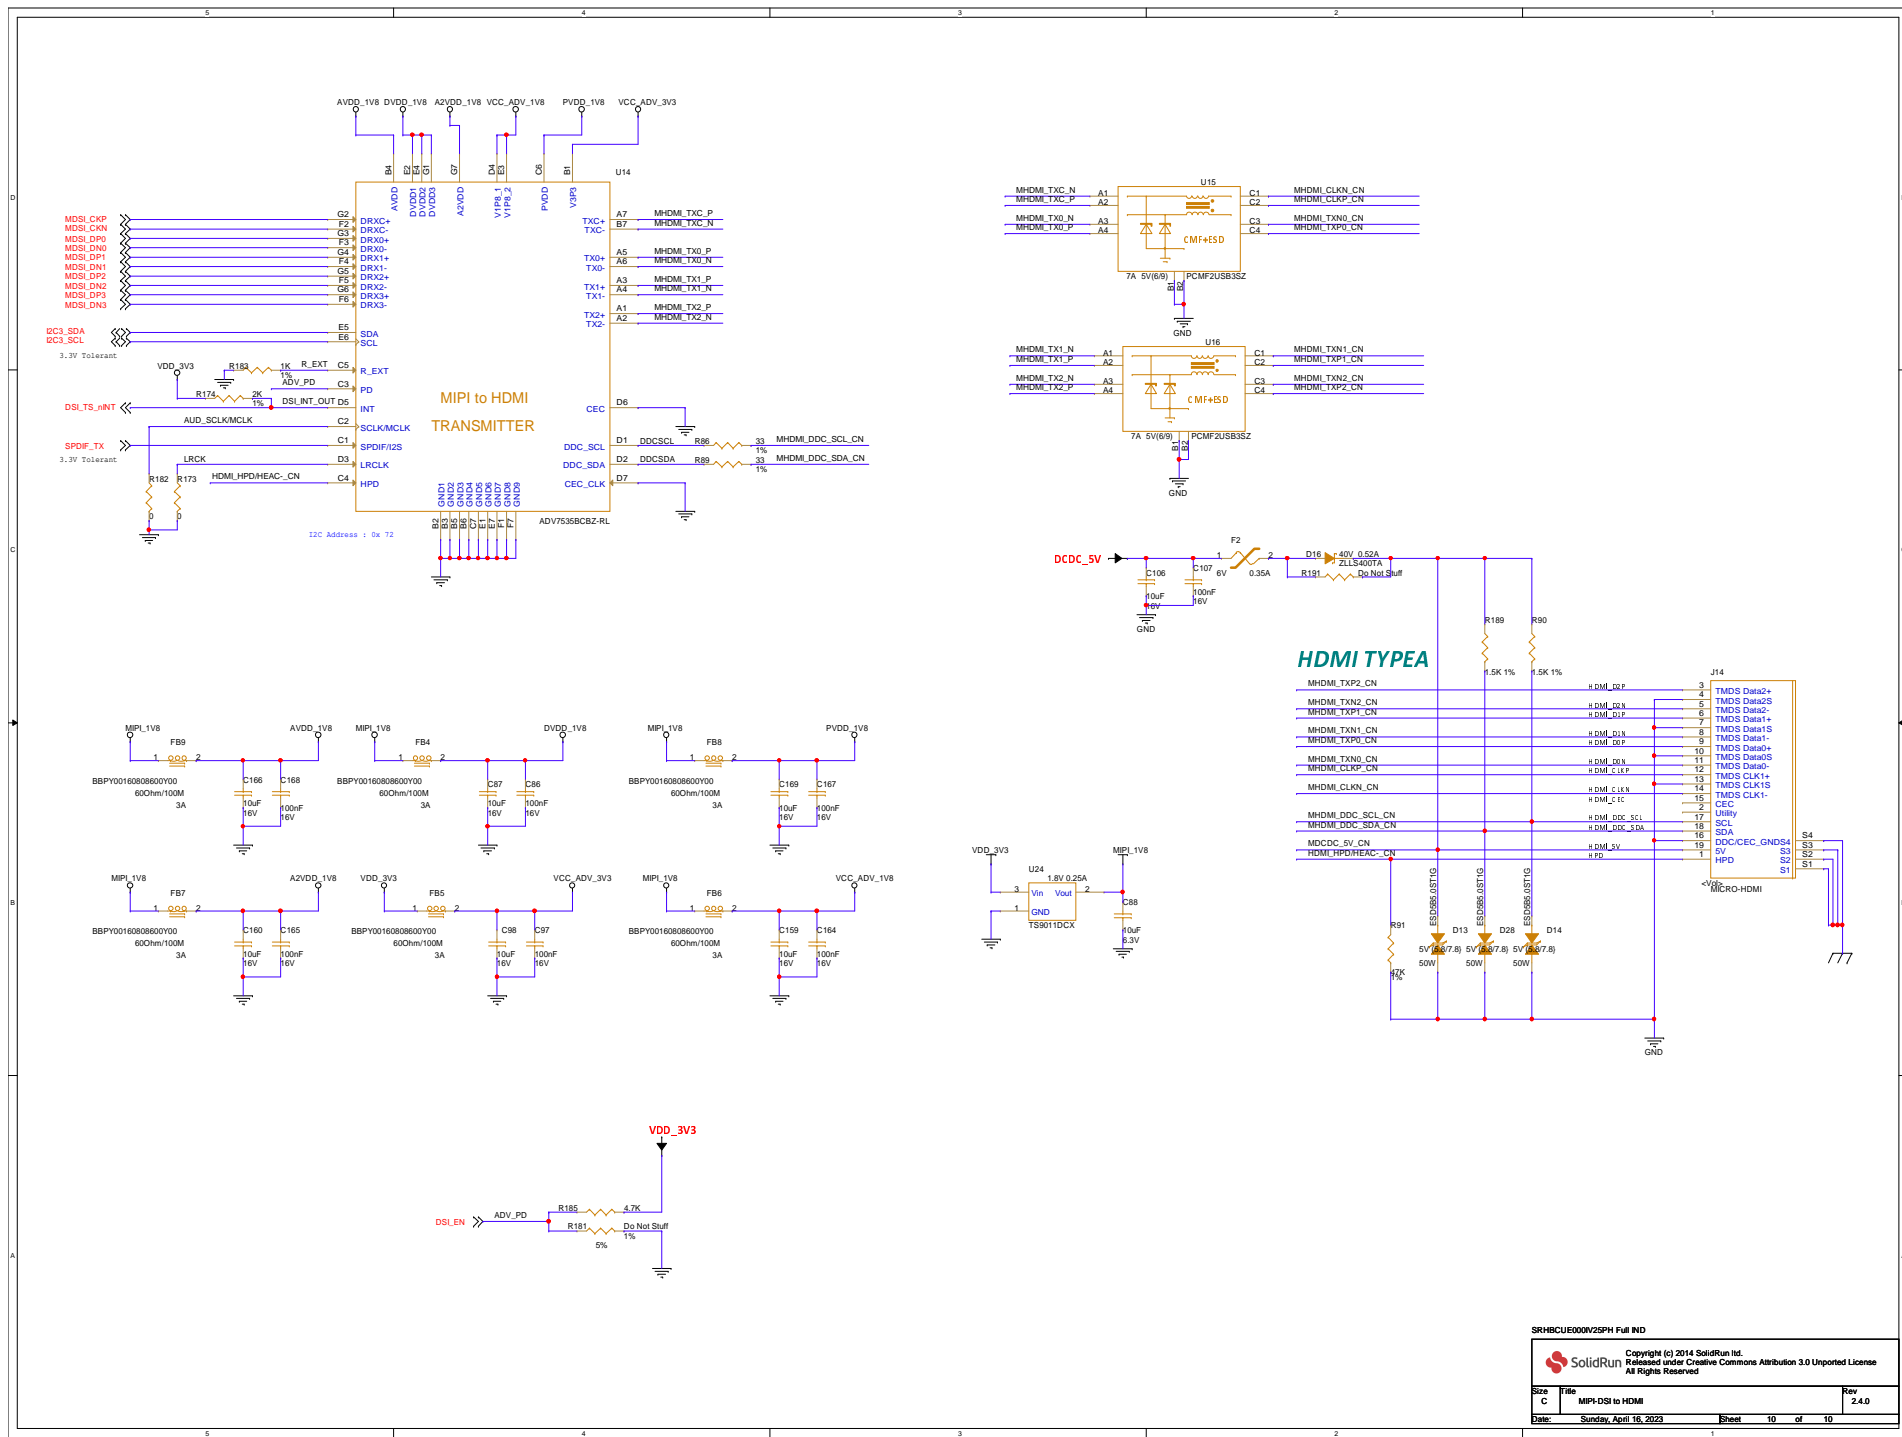

Rev. 1.0 Prototype Version

SRHBCUE000IV25PH Full IND



Copyright (c) 2014 SolidRun Ltd.
Released under Creative Commons Attribution 3.0 Unported License
All Rights Reserved

Size B	Title HISTORY	Rev 2.5.0
Date: Sunday, April 16, 2023 Sheet 11 of 11		