


8.5 Reference Design

Optional pullups to keep
RTS and DTR asserted
when left unconnected

WIT910 Interface

RS-232 Interface

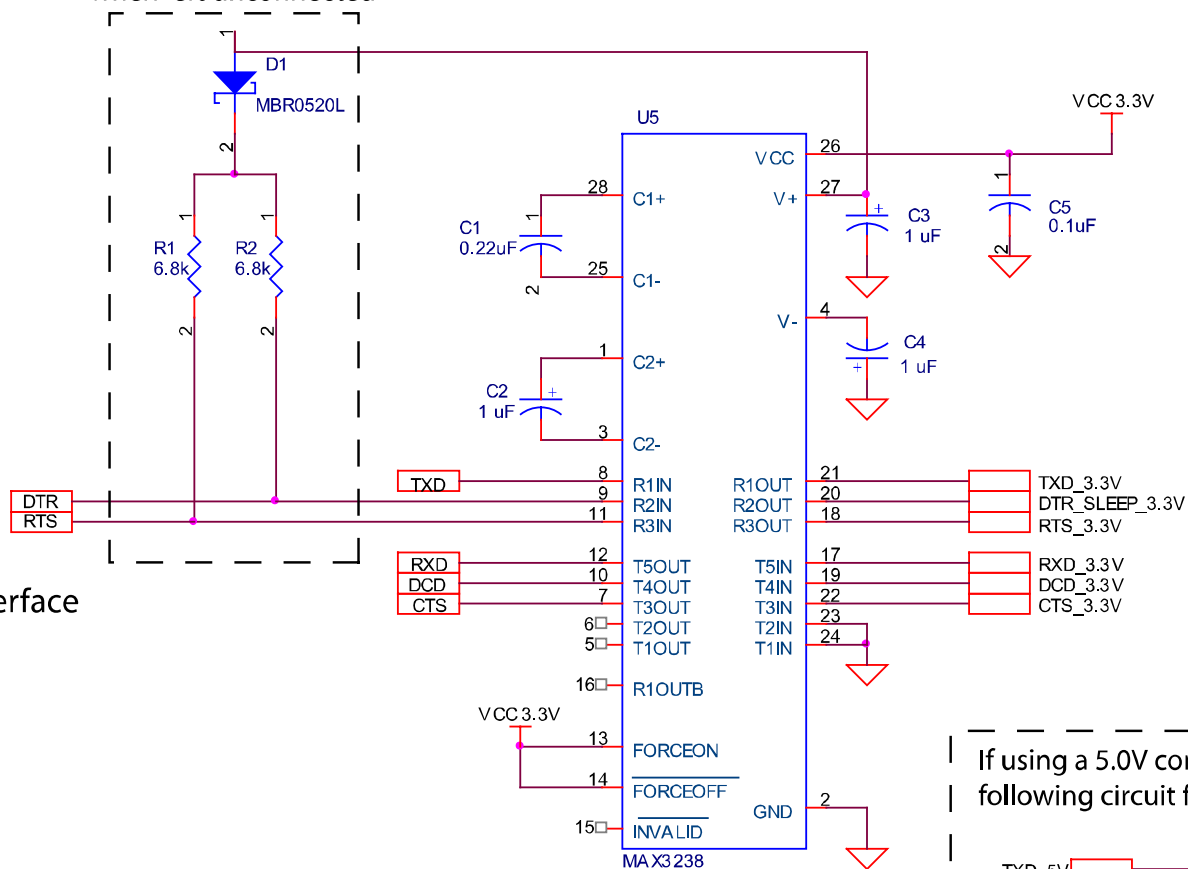

If using a 5.0V converter, use the
following circuit for TXD, DTR and RTS

