Preliminary

RFM products are now Murata products.

SF2342D

836.5/881.5 MHz SAW Duplexer Filter

- ***Band 5***
- ***Low Insertion Loss Duplexer SAW Filter***
- ***3.8 x 3.8 mm Surface-mount Case***
- ***Complies with Directive 2002/95/EC (RoHS)***



SM3838-12

Absolute Maximum Ratings

Rating	Value	Units
Average Input Power	+31	dBm
Maximum DC Voltage Between any Two Terminals	0	VDC
Storage Temperature Range in Tape and Reel	-40 to +85	°C
Operating Temperature Range	-30 to +85	°C
Suitable for Lead-free Soldering - Maximum Soldering Profile	260 °C for 30 s	
Peak Input Power	+33	dBm

Electrical Characteristics

Characteristic	Sym	Note	Min	Typ	Max	Units
Ant to Rx (836.5 MHz)						
Insertion Loss, 824.0 to 849.0 MHz				1.5	2.2	dB
Amplitude Ripple, 824.0 to 849.0 MHz				0.4	1.0	dB
VSWR, 824.0 to 849.0 MHz				1.9	2.4	
Attenuation: 859.0 MHz			4	9		dB
869.0 to 894.0 MHz			45	50		
Tx to Ant (881.5 MHz)						
Insertion Loss, 869.0 to 894.0 MHz				2.0	3.0	dB
Amplitude Ripple, 869.0 to 894.0 MHz				0.8	1.5	
VSWR 869.0 to 894.0 MHz				1.7	2.2	
Attenuation 824.0 to 849.0 MHz			50	58		dB
859.0 MHz			4	13		
Tx to Rx						
Isolation 824.0 to 849.0 MHz			50	55		dB
Isolation 869.0 to 894.0 MHz			48	53		

Case Style		SM3838-12 3.8 x 3.8 mm Nominal Footprint
Lid Symbolization (Y=year, WW=week, S=shift) dot=pin 1 indicator		B08, YWWS
Standard Reel Quantity	Reel Size 7 Inch	500 Pieces/Reel
	Reel Size 13 Inch	3000 Pieces/Reel

CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

NOTES:

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. The design, manufacturing process, and specifications of this filter are subject to change.
5. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
6. US and international patents may apply.
7. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.

Frequency Characteristics

Rx

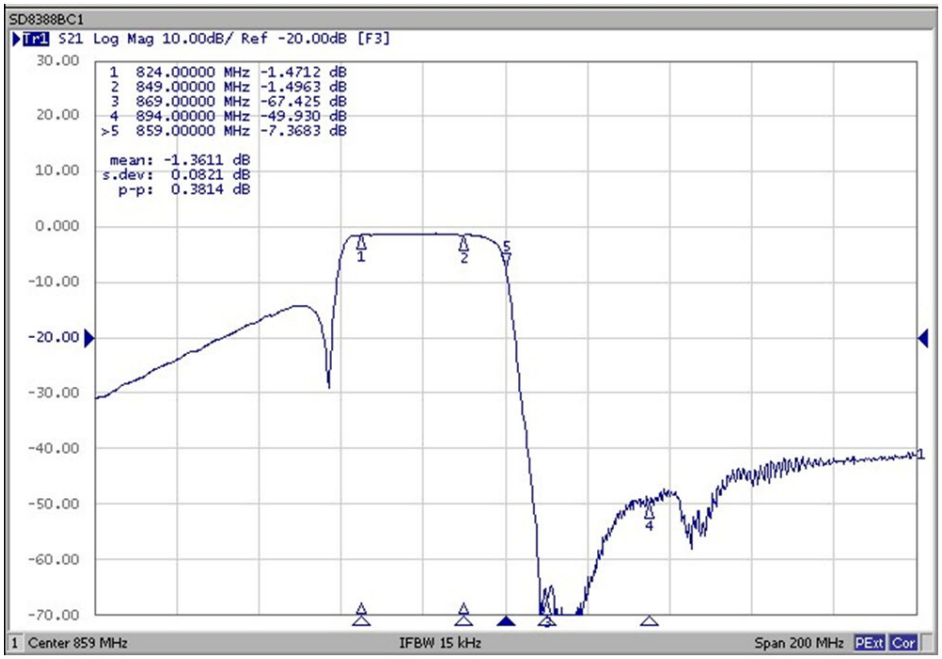

Tx

Isolation

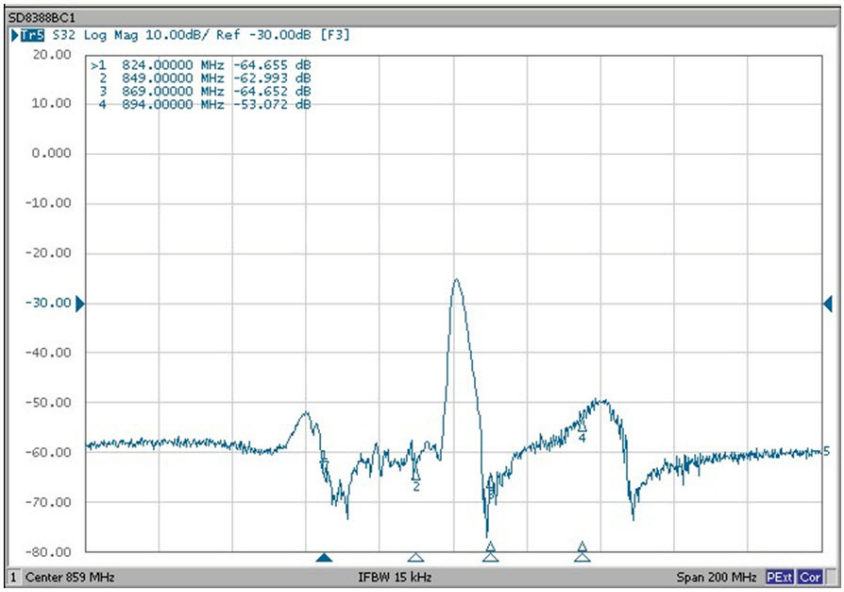

Ant - Smith Chart and VSWR

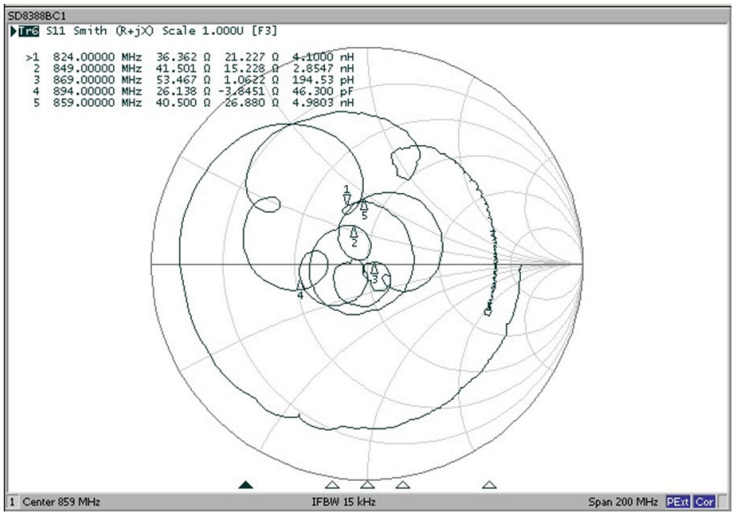

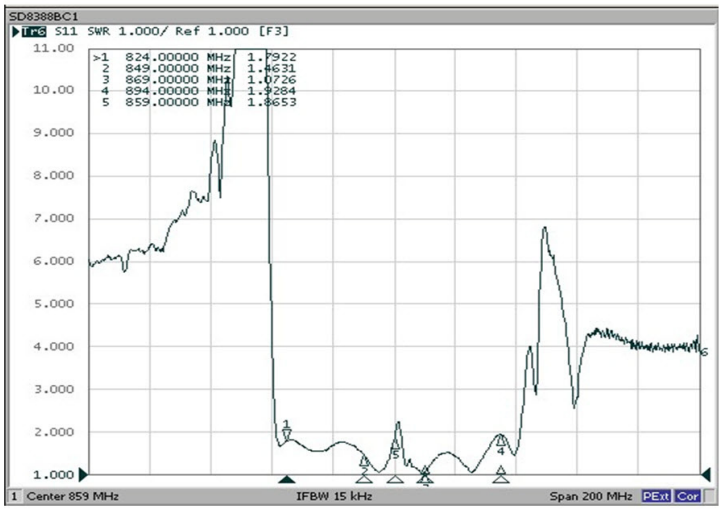

Rx - Smith Chart and VSWR

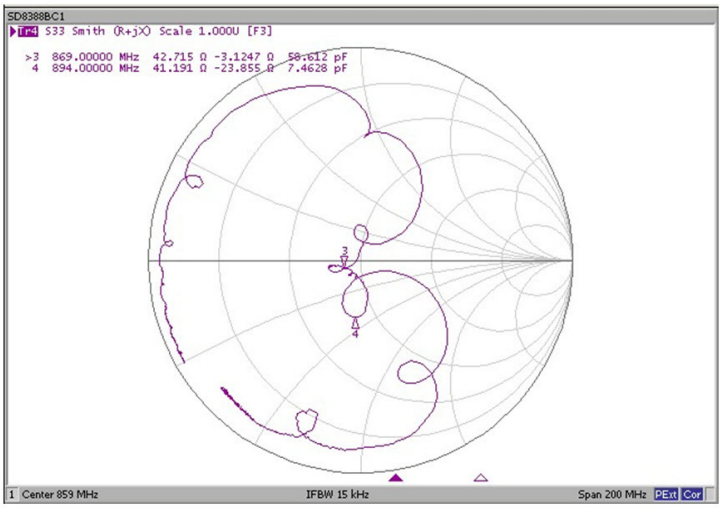

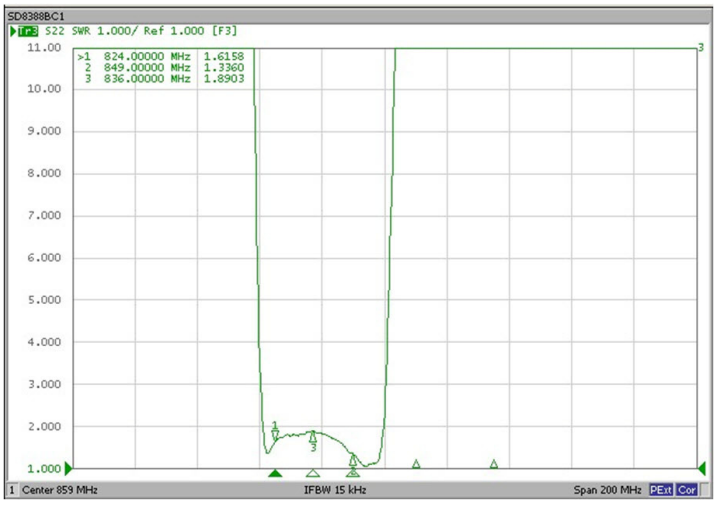

Tx - Smith Chart and VSWR

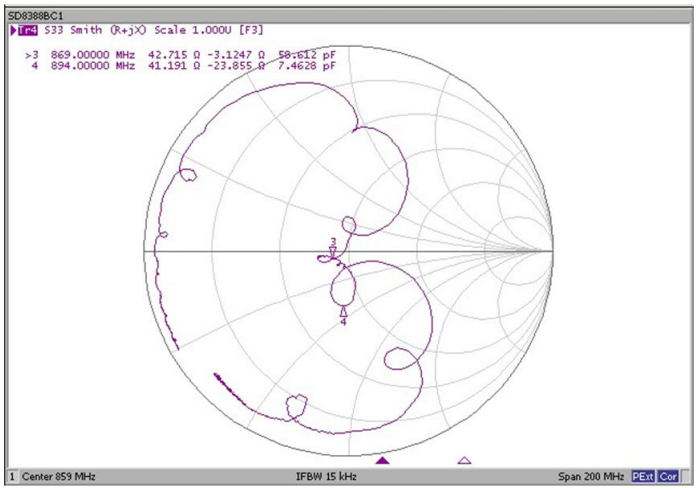

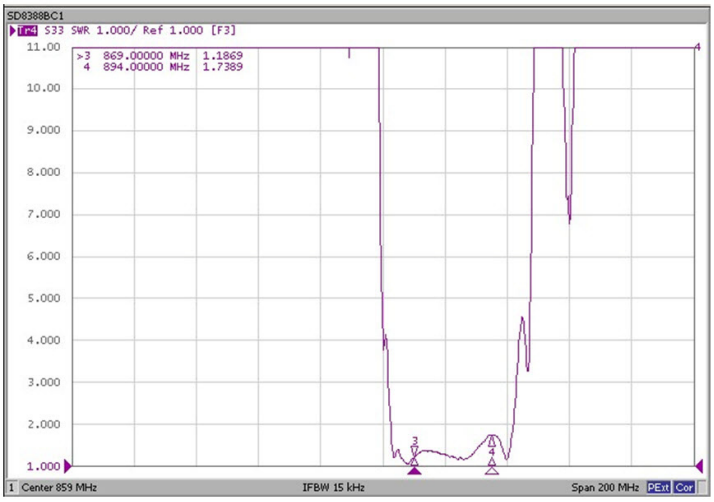

Measurement Circuit

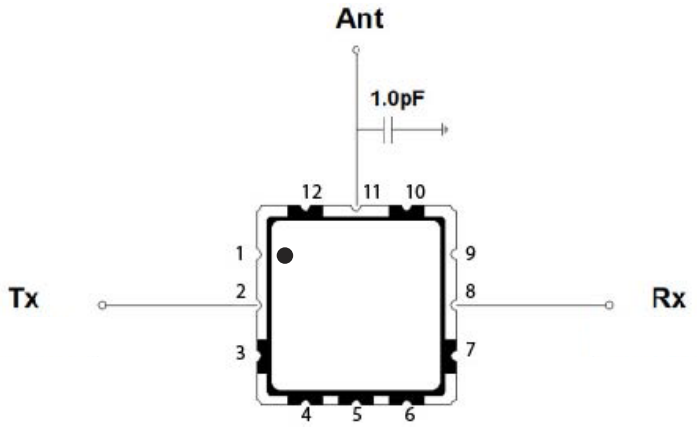

Electrical Connections

Pin	Connection
1, 3, 4, 5, 6, 7, 9, 10, 12	Ground
11	Ant
2	Tx
8	Rx
Dot Indicates Pin 1	

SM3838-12 Case

12-Terminal Ceramic Surface-mount Case
3.8 X 3.8 mm Nominal Footprint

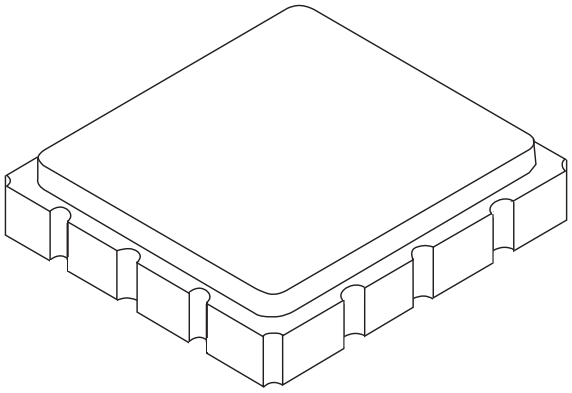

Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A		3.8			0.14	
B		3.8			0.14	
C			1.45		0.057	
D		0.45			0.017	
E		0.60			0.023	
F		1.60			0.062	
G		1.10			0.043	
H		1.20			0.047	
I		0.80			0.031	

Solder Pad Plating	0.3 to
Lid Plating	2.0 to
Body	Al_2O_3
Pb Free	

TOP VIEW

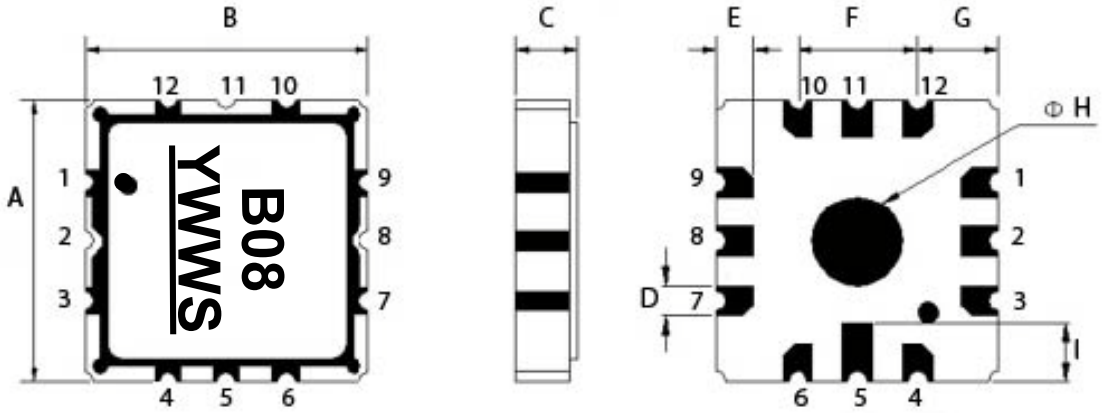

BOTTOM

Tape and Reel Specifications

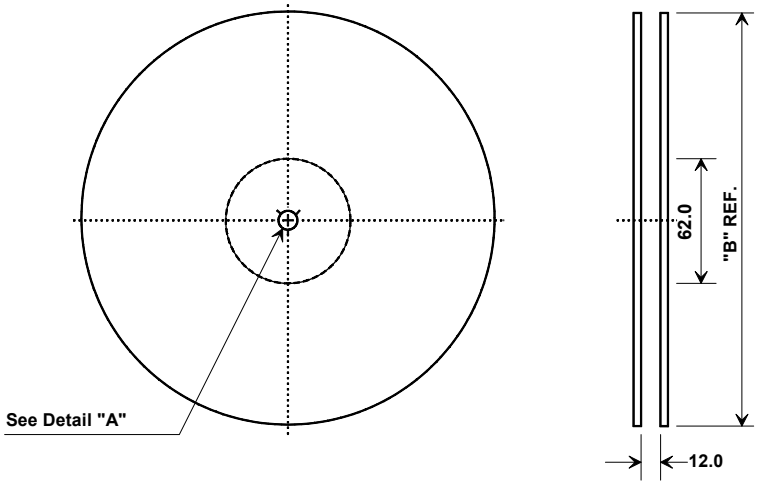



"B" Nominal Size		Quantity Per Reel
Inches	millimeters	
7	178	500
13	330	3000

COMPONENT ORIENTATION and DIMENSIONS

Carrier Tape Dimensions	
Ao	3.4 mm
Bo	3.4 mm
Ko	1.40 mm
Pitch	4.0 mm
W	12.0 mm