



## Removing the TX, RX and TR from the PCB

### Using Hotplate


TR to be removed from PCB

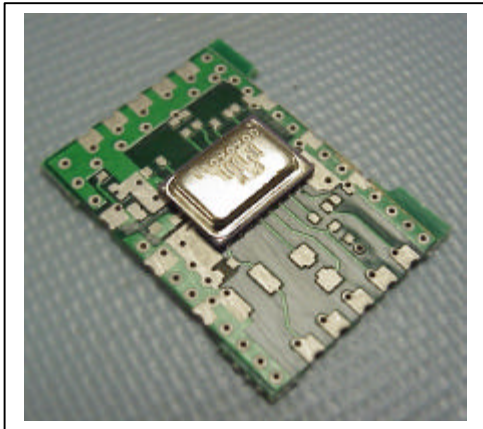

Pre-heat the hotplate to 200°C.  
Place the PCB on the top of the  
hotplate.

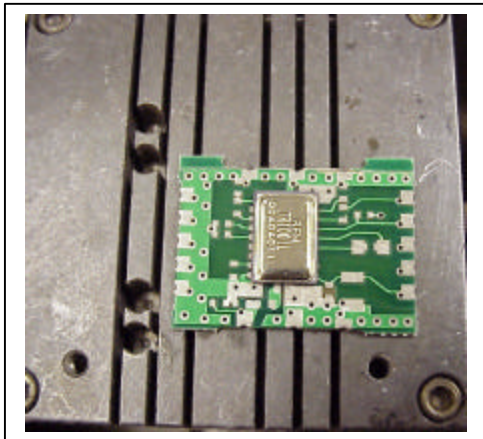


Remove the TR from the PCB.

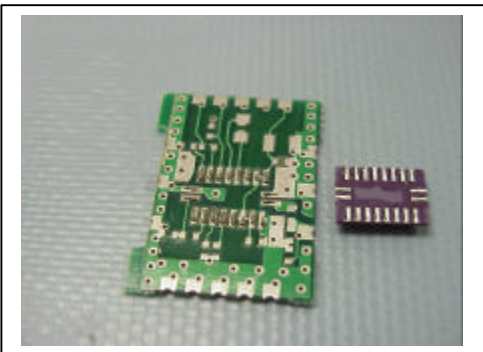


### Using Hotgun

TR to be removed from PCB

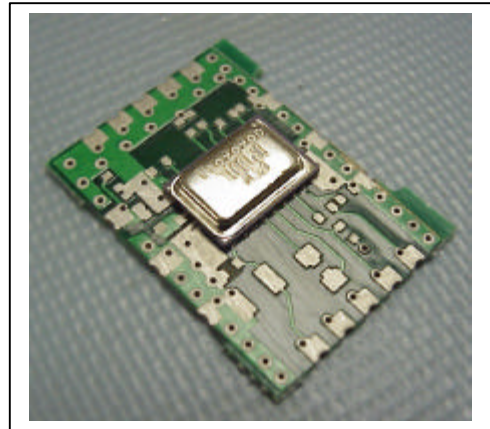

Pre-heat the PCB with a hotgun.

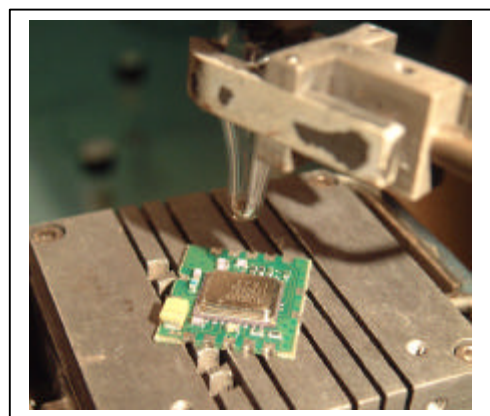

Remove the TR from the PCB.

