(U) ModelNameGoesHere
User and Analyst Manual



DRAFT

Prepared By:
Revision: 4.0
Date: 20251114

Classified By:
Derived From:
Declassify On:

Controlled by:	NGIC
Distribution/Dissemination Controls:	NGIC
POC:	Mike Lesniak, NGIC
Contact:	usarmy.charlottesville.ngic.list.modsimoffice@mail.mil

12

DRAFT

(U) FOR TITLE PAGE
(U) TIMELINE: MOST ITEMS: Ready by SRR, finalized by PDR. REVISION NUMBERS & DATES: Finalized at FDR.
(U) "Prepared By" and "Classified By" must be a company name, not an individual's name
(U) All dates are in YYYYMMDD format, both "Date" and "Declassify On" (unless the declassification is not on a specific date).
(U) If the document is classified, the Classification Block should be, "Classified By:", "Derived From:", "Declassify On:". If the document contains CUI, the CUI Block should be, "Controlled By:", "CUI Category(ies):", "Limited Dissemination:", "POC:", "Contact:". Unclassified documents have no Classification Block, and documents without CUI have no CUI Block.

(U) FOR REVISION TABLE:
(U) TIMELINE: Each milestone submission needs its own row, in 0.# format. Final delivery is 1.0. Dates are YYYYMMDD.

UNCLASSIFIED

Revision	Date	Author	Description of Changes
1.0	201609	NGIC (Everett)	Initial Draft
2.0	202304	NGIC (Everett)	Revised for new Projects
2.1	20240908	BAH	Revised for new projects and formatting
2.2	20240916	BAH	Revised based on NGIC Feedback
2.3	20241227	BAH	Revised based on NGIC Feedback
2.4	20250105	BAH	Revised based on NGIC Feedback
3.0	20250217	BAH	Baselined to 3.0 release for document templates
4.0	20251114	BAH	Baselined to 4.0 release for document templates

UNCLASSIFIED

DRAFT

(U) Table of Contents

1 (U) Introduction 1

2 (U) Threat System Description 1

2.1 (U) Threat System CONOPS . . . 2

3 (U) Model Description 2

3.1 (U) Model Functional Block Diagram . . . 3

3.2 (U) Model Intended Use . . . 3

3.3 (U) Model Parameters . . . 3

3.4 (U) Model Key Performance Indicators and Equations . . . 4

3.5 (U) Assumptions, Limitations, and Gaps . . . 4

4 (U) Threat Model Components 5

4.1 (U) Sample Component Overview . . . 5

4.1.1 (U) Sample Component Functional Behavior . . . 6

4.1.2 (U) Sample Component Formulas, Equations . . . 8

4.1.3 (U) Sample Component Key Performance Indicators . . . 9

4.1.4 (U) Sample Component Parameters . . . 9

4.1.5 (U) Sample Component Assumptions, Limitations, and Gaps . . . 10

5 (U) Basic Setup and General Guide 10

5.1 (U) Scenario Setup . . . 10

5.2 (U) Model Specific Setup . . . 10

5.3 (U) Model Parameters . . . 12

6 (U) Analytic Outputs 13

6.1 (U) Model Specific Log Files . . . 13

6.2 (U) Test Asset . . . 13

6.3 (U) Additional Tools . . . 14

7 (U) Model Fidelity Log 15

7.1 (U) General Model Fidelity . . . 15

DRAFT

7.2 (U) Model Log: Sub-System Name 16
8 (U) Sources 17
8.1 (U) Confidence Summary 17
9 (U) Acronyms 18

DRAFT

(U) List of Tables

1 (U) KPI and Equations Summary Table 4
2 (U) Antenna One Parameters 7
3 (U) Antenna Two Parameters 8
4 (U) Model Parameters 9
5 (U) Model Parameters 12
6 (U) Log File: RxPower 13
7 (U) Overall Model Notes 15
8 (U) Model Log: Sub-System Name 16
9 (U) References 17

DRAFT

(U) List of Figures

1 (U) Intel Image Here 1
2 (U) Block Diagram Here 3
3 (U) Antenna One Pattern 7
4 (U) Antenna Two Pattern 8
5 (U) GUI Selection 11
6 (U) GUI System Options 12

DRAFT

1 (U) Introduction

(U) TIMELINE: Should be finalized prior to SRR, and unless it's a brand new type of system, should be reasonably understood prior to kickoff. (U) This section provides a high-level overview of the document's purpose and scope. It defines the intended audiences—such as users, developers, and stakeholders—and explains how the document supports their understanding and use of the model. It establishes the foundation for all subsequent sections by outlining the intended use for the model and the structure of the documentation.
(U) EXAMPLE: This document is a companion to the primary documentation on the Overarching Dynamic Electronic-Warfare System Standard Architecture (ODESSA) architecture which specifically outlines the relevant data on the ModelNameGoesHere *type* model. The information in this document outlines the equations, mathematical algorithms, theoretical background, and gives context to the decisions and methodologies which guided the development of the EXAMPLE MODEL NAME model. This document prepares users and analysts to work with the EXAMPLE MODEL NAME by detailing its parameters and providing a setup guide.

(U) The ModelNameGoesHere User and Analyst Manual (UAM) discusses the purpose, scope, and function of the ModelNameGoesHere *type* model developed by Booz Allen Hamilton (BAH) in the Overarching Dynamic Electronic-Warfare System Standard Architecture (ODESSA) framework in support of the National Ground Intelligence Center (NGIC).

2 (U) Threat System Description

UNCLASSIFIED



Figure 1: (U) Intel Image Here

UNCLASSIFIED

DRAFT

(U) TIMELINE: Should be finalized prior to SRR, and it should be finalized and approved by SME no later than PDR.
(U) Please include as much system level information about the real threat as you can in this section. This section is focused exclusively on how the real system operates and performs its functions.
(U) Example discussion could include: The ModelNameGoesHere is an Elbonian system built to target systems in the 8-12GHz range. The system is a single truck composed of an Early Warning Receiver (EWR), jammer, and Command and Control (C2). The image above is a collection image of the ModelNameGoesHere. The antenna is a phased array with X number of elements, etc.
(U) Additional information to include or consider:
1) (U) Does it deploy independently or with other systems (doing similar or different tasks) beyond C2?
2) (U) What does it target: specific system or general system type?
3) (U) Origin country? Proliferated?
4) (U) Who does it belong to and deploy with?
5) (U) Effective range? Detection Range? Engagement range (WEZ)?
6) (U) Number and types of antennas, wheels, tubes, tracks, rotors, engines, etc.
7) (U) It was developed in year X and is similar to system Y or a follow on to system Z.
(U) Include details on operation if known and any other information that is known or what may be limited on intel.

2.1 (U) Threat System CONOPS

(U) TIMELINE: This section should be filled in prior to Preliminary Design Review (PDR) and finalized by Critical Design Review (CDR).
(U) Also describe the Concept of Operations (CONOP) of the system. The CONOP description will provide a foundation for the reader to understand the relation of the system to the simulated operational environment and other systems in the system-of-systems. This foundation will provide context to the engineering and design decisions described in the model documentation package, including the detailed description of the subsystems and engineering design in this document (reference component sections directly).
(U) For example, the model CONOP may describe that the system can only function in autonomous stand-alone mode, but when the model is integrated into a simulation environment, such as Integrated Threat Analysis and Simulation Environment (ITASE), battery mode can be employed by creating multiple instantiations of the model that are subordinated to a separate C2 model.

3 (U) Model Description

(U) TIMELINE: This section should be filled in prior to System Requirements Review (SRR) and finalized by PDR.
(U) Give here a high-level overview of the model. Connect it to the threat system by describing its similarities and differences.

3.1 (U) Model Functional Block Diagram

(U) TIMELINE: Should be finalized prior to SRR. (U) Below is a functional block diagram of the system model that defines how the various system components connect to each other. This section should also contain descriptions that capture any specifics about the general structure and flow of the system, which includes things like, "The system is broken out into two different entities" or different systems, etc. Please describe any major attributes of the system structure.
(U) The below example is designed for the overall model. Include zoom ins and additional images as needed (either below or in component and sub-component sections as appropriate) to demonstrate how the system works at a more detailed level.

UNCLASSIFIED



Figure 2: (U) Block Diagram Here

UNCLASSIFIED

DRAFT

3.2 (U) Model Intended Use

(U) TIMELINE: This section should be filled in prior to SRR and finalized by Probability Density Function (PDF).
(U) Describe the intended use of the model. This section will cover the intended use of the model, and also any additional limitations or capabilities that might become relevant in a different use case.
(U) For example, the intended use could include the ability to use the model to calculate Jamming-to-Signal Ratio (J/S) or jamming output without creating jamming Simulated Pulse Descriptor Word (SPDW)s.

3.3 (U) Model Parameters

(U) Each parameter for the ModelNameGoesHere model appears in **Table 5**.

3.4 (U) Model Key Performance Indicators and Equations

(U) TIMELINE: This should be filled in by PDR and finalized at CDR.
(U) REQUIREMENT: Complete the table to indicate, for each component, its KPI(s). Use references only in the "Equations" column, i.e. \enumref{label}. This is a reference table only, discussion of these take place in the Component file.

(U) **Table 1** lists each component's Key Performance Indicator (KPI)s and any equations that contribute to its function. Reference the appropriate Component section for discussion of each KPI.

Table 1: (U) KPI and Equations Summary Table

UNCLASSIFIED		
Component	Key Performance Indicator	Relevant Equations
Receiver	Received Power	1
		UNCLASSIFIED

3.5 (U) Assumptions, Limitations, and Gaps

(U) TIMELINE: This section should be started at SRR and finalized by CDR. Please note that this is expected to be a collaborative effort between the intel analyst, Technical Point of Contact (TPOC), and model leads with back forth.
(U) Threat assumptions are necessary to complete model development when certain information is needed but insufficient intelligence data exists. Such assumptions are often labeled "engineering judgment." Documentation should identify the basis for key assumptions. The intelligence products we have access to are themselves derived from a number of sub-sources and assumptions. Documentation will identify key assumptions for the defined use cases evaluated in the Verification and Validation (V and V) report. Documenting all assumptions will enable users to perform a key assumptions check for use cases other than the defined use cases identified in the V and V report.
(U) It is essential that the assumptions used in the model are properly captured and documented to allow the user to understand the reasons to use (or not use) alternative assumptions in the future, and to understand where the model is more limited in emulating the associated system. It is also imperative for future users when using the model in ways that were not tested or documented during model development, as future testing will need to observe and understand the model's assumptions in order for the model to continue to behave properly outside of the V and V report's scope.
(U) Intelligence policy requires clearly distinguishing assumptions and judgments from underlying intelligence information. Documentation will comply with distinctions and articulate implications if key assumptions are incorrect. The list of assumptions will enable users to identify linchpin assumptions for uses outside of the evaluated test case(s).
(U) More details:
(U) Discuss assumptions, limitations, and gaps including: gaps in intelligence, limited implementations of intelligence, assumptions that either fill in the gaps above or simplify model behavior compared to intelligence information, gaps in implementation due to time/funding prioritization, assumptions on approximate code solutions to complex intelligence issues, and limitations in the code base for the model that lead to changes in behavior.
(U) List and discuss how intelligence gaps affect model development, how the gaps were filled and what assumptions were used, and the potential impact or limitations to model usefulness. Specific component details should have these captured in their respective sections.

4 (U) Threat Model Components

(U) Do not change this text.

(U) This section describes the components that make up the ModelNameGoesHere model.

4.1 (U) Sample Component Overview

(U) TIMELINE: Should be populated prior to PDR and finalized by CDR.
(U) In the context of this document, component refers to a functional block of code that is available within the software model that is representing a real-world capability or effect. In most cases, component refers to one of the blocks in the block diagram which is contained in the UAM document and/or the code flow diagram contained within the Architecture Description Document (ADD). Note for most cases, if there is a block in the code flow or block diagram, there should be a component (or multiple) section for each block.
(U) Describe the purpose of the Product Component and the rationale for developing, reusing, or refactoring the Product Component. For Product Components that will be reused or refactored, provide a reference to the existing design if applicable.

(U) In the Unified Modeling Language (UML) example, there is a jammer processor which should be discussed as a component, and then individual components for each jamming mode (barrage, spot, etc.)
EXAMPLE: This component can be instantiated multiple times to represent multiple antennas in the array, and the specific positioning of the individual antenna is specified in the input_param_struct." ... One of the input parameters allows the developer to configure the antenna as a receiver or a transmitter.
This component returns a gain_struct relative to the antenna boresight, the pedestal component (described in section y.x) is responsible for providing the physical pointing direction, so the gain in a particular direction at any particular time in the simulation is calculated by taking the outputs from X and Y and interpolating...
This component cannot interact directly with an external sim, and so does not have a function described in the ICD. However, for deep dive analysis of the system model, the telemetry_struct can be logged.

4.1.1 (U) Sample Component Functional Behavior

(U) TIMELINE: Should be finalized prior to PDR with final edits by CDR.
(U) This section is focused on the functional side of the component and what it is representing in the RF domain as well as any math or data behind the component. This section is expected to be more focused on the physics and engineering behind what is going on with the component. If data is coming from a connected component, please include a transition statement explaining the connection between these components. Example could be the previous component describes the detection logic, and then this component describes the track filter. Connect this to the previous component by referencing the measured data from the detector is used in the track filter, etc.
(U) Make sure to include the analytic background of the component to include detailing the algorithmic, mechanical/hardware, operational, or decision-making behavior(s) of the component. Examples of each of these include the following ideas:
o (U) Algorithmic behavior can be considered as a behavior which can be described mathematically: Dwell Time Calculation, Signal Prioritization
o (U) Mechanical/Hardware behavior can be considered as a behavior defined through physical properties: Constant rotation/translation rate, Constant gain presented, Constant bandwidth limitations, Maximum rotation/translation rate/distance
o (U) Operation behavior can be considered as a behavior defined by a sequential series of events: radar signal processing sequences
o (U) Decision-making behavior can be considered as a behavior defined by branching paths based on a condition: Dynamic mode switching, Dynamic signal adjustment
(U) For example, if the component is focused on the antenna, this section may focus that the phased array is represented as a sum pattern of the elements and to capture the electrical steering is just pointing the sum pattern in that direction and applying a roll-off to the gain instead of steering it. It would include antenna patterns, measured beamwidths, and comparisons to measured data.
(U) Please include high-level picture demonstrating the purpose of this component as a reference to walk through the code as necessary.
(U) EXAMPLE: The Example Antenna Ones are arranged in a rectangle with two horizontal rows of eight. The Example Antenna Ones are fastened onto a metal ground plane to reflect their transmissions and amplify the jamming signal strength. **Figure 3** displays the diagram of the Example Antenna One array and its antenna pattern, and its parameters are described in **Table 2**.
(U) EXAMPLE: For receiving, the system contains two AESA phased array antennas to allow the system to analyze threat signals and react accordingly. The antenna parameters for the AESA antennas can be seen above in **Table 3**, and the Three Dimensional (3D) radiation pattern for the antennas can be seen in **Figure 4**.

UNCLASSIFIED



Figure 3: (U) Antenna One Pattern

UNCLASSIFIED

Table 2: (U) Antenna One Parameters

UNCLASSIFIED	
Parameter	Value
Feed Width	XXX
Feed Height	XXX
Peak Gain	XXX
Minimum Frequency	XXX
Maximum Frequency	XXX
	UNCLASSIFIED

DRAFT

UNCLASSIFIED



Figure 4: (U) Antenna Two Pattern

UNCLASSIFIED

Table 3: (U) Antenna Two Parameters

UNCLASSIFIED	
Parameter	Value
Feed Width	XXX
Feed Height	XXX
Peak Gain	XXX
Minimum Frequency	XXX
Maximum Frequency	XXX
	UNCLASSIFIED

DRAFT

4.1.2 (U) Sample Component Formulas, Equations

(U) TIMELINE: This section should be started by PDR, and finalized by CDR.
(U) Describe here any important calculations performed by this Component. If an equation is important to more than one Component, describe it once in its primary Component and use a cross-reference to refer to the discussion from other Component files. Be sure to discuss any connection between formulas and KPI that is stated in the overall KPI summary of the Model Description above. Cite sources for lesser-known equations, formulas, and processes; this needn't be an intel source, it could be a textbook.

(U) Received Power is a KPI for the Receiver. **Equation 1** is the calculation used by the ReceivorProcessor in the ReceivedPower method.

UNCLASSIFIED

$$P_r = \frac{P_t G_t G_r \lambda^2 \sigma}{(4\pi)^3 R_t^2 R_r^2 L} \quad (1)$$

(U) The Radar Range Equation

UNCLASSIFIED

4.1.3 (U) Sample Component Key Performance Indicators

(U) TIMELINE: This should be filled in by PDR and finalized at CDR. (U) REQUIREMENT: Describe here, in detail, those KPIs that appeared in the overall KPI table in the Model Description above that relate to this component. Figures are encouraged.
(U) EXAMPLE: Because ODESSA cannot process IQ data, a part of this feature is limited to be represented as an approximation, as denoted in **Equation 1**.
(U) EXAMPLE: Since there is an intel gap about the receiver processing, and we assume that it has an internal processing receive gain of 30 dBW after several discussions with the analysts, which is applied after an SPDW is received and propagated in **Equation 1**.

4.1.4 (U) Sample Component Parameters

(U) Copy the parameters table, but only those rows that are applicable to this component

Table 4: (U) Model Parameters

UNCLASSIFIED

Variable	Description	Default and Classification	Component	User Tunable?	Source Number
OperationalBW	Frequency range the system operates over	(U) 100-200MHz	Receiver	No	2
Frequency	Center frequency of the system	(U) 110MHz	Receiver	GUI	1

UNCLASSIFIED

DRAFT

4.1.5 (U) Sample Component Assumptions, Limitations, and Gaps

(U) TIMELINE: Should be finalized prior to PDR with final edits by CDR.
(U) Capture any assumptions, limitations, gaps, or design decisions around this component that may impact analysis use or future re-use—especially those that are related to how the model was programmed vs how it behaves.
(U) Be careful not to conflate the component ALG description appropriate in the ADD with the system model ALG details that are appropriate in the UAM.
(U) For the antenna example, this can include that due to how the steering is captured, that the broadening of the mainbeam and any sidelobe impacts will not be captured in the process. This can impact J/S calculations or impacts of sidelobe jammers.

5 (U) Basic Setup and General Guide

5.1 (U) Scenario Setup

(U) Do not change this section.

(U) Please reference the ODESSA User and Analyst Manual for details on how to configure the ODESSA GUI. This section is focused on the ModelNameGoesHere GUI.

5.2 (U) Model Specific Setup

(U) TIMELINE: This section should be completed by Test Readiness Review (TRR), but any plans to modify the GUI should be described/pictured here no later than CDR even if the work hasn't been completed.
(U) GUI image below should be replaced with your system. Use multiple images and incremental descriptions if necessary. Zoom in to make it easier to read.
(U) For ODESSA, several models require input CSVs for waveforms, etc. The set up of these files needs to be included in this section.
(U) Specific text around the system options that can be specified in the GUI should be shown in Figure 6.

DRAFT

UNCLASSIFIED

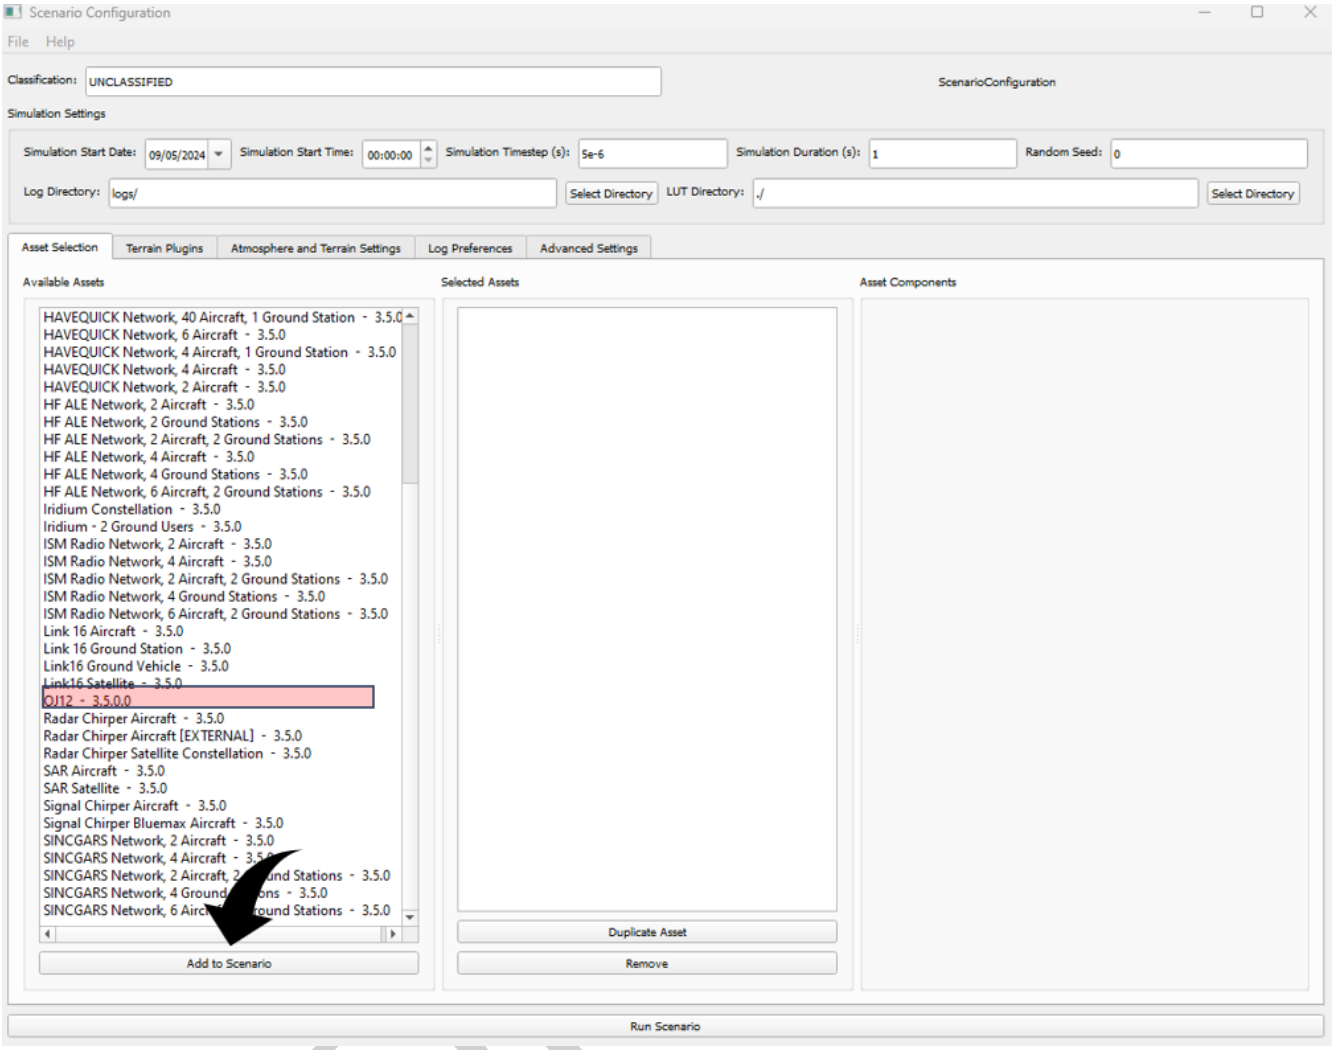


Figure 5: (U) GUI Selection

UNCLASSIFIED

(U) The ModelNameGoesHere is selected from the "asset selection" tab within the GUI shown in Figure 5. The system can be added by either double clicking on the ModelNameGoesHere, or it can be selected and then click "add to scenario".

UNCLASSIFIED



Figure 6: (U) GUI System Options

UNCLASSIFIED

5.3 (U) Model Parameters

(U) TIMELINE: This section should be filled in for PDR and finalized for CDR.
(U) The purpose of this section is to provide a consolidated location for all of the input parameters used to make this a system-specific model, whether hard-coded or set by the user.
(U) The Component column should show which component is most directly affected by the setting.
(U) Refer to sources by reference number from the References Table.
(U) Options for user-tunable column are no (it's hard-coded), GUI, or super user input.
(U) Also include settings that may need to be set to specific values such as the time step in the GUI.

(U) Parameters used or available for the model are listed in **Table 5**. The user-tunable column has three options: No, GUI input, or super-user input (SUI).

Table 5: (U) Model Parameters

UNCLASSIFIED

Variable	Description	Default and Classification	Component	User Tunable?	Source Number
OperationalBW	Frequency range the system operates over	(U) 100-200MHz	Receiver	No	2
Frequency	Center frequency of the system	(U) 110MHz	Receiver	GUI	1

UNCLASSIFIED

DRAFT

6 (U) Analytic Outputs

(U) TIMELINE: Model outputs should be available for NGIC review starting at CDR with this section, but it should be finalized by TRR.
(U) This section should focus on outputs that are specific to the system.

(U) Please reference the architecture UAM for common log outputs that are available to all models through the environment. This section is focused on the analytic outputs that the specific ModelNameGoesHere provides.

(U) This section includes additional outputs from this specific model that the user can gain access to that may not be available to other models. This section includes any output post-processing tooling that is available as well.

6.1 (U) Model Specific Log Files

(U) TIMELINE: This section should be discussed at PDR and finalized by CDR.
(U) This section should focus and include any log files that are unique to the system model. Include the output log file naming, the overall intent of the log file, columns of data and units of the log file.

Table 6: (U) Log File: RxPower

UNCLASSIFIED		
RxPower Log File		
Description:		
Title	Units	Description
TxTime	s	Transmit time from the jammer
		UNCLASSIFIED

6.2 (U) Test Asset

(U) TIMELINE: This section should be discussed at PDR and finalized at CDR.
(U) This section should focus and include all details for a test asset that does not reside in the native model architecture. This includes a user guide on how to run the test asset, any parameters that can be modified, representative outputs and what data is being displayed.
(U) If the test asset does exist in the native architecture, reference the architecture's UAM with details on the test asset and just focus on communicating which test asset has been used/tested with this system.
(U) Note any default values or ways that it's used in a non-standard way.

DRAFT

6.3 (U) Additional Tools

(U) TIMELINE: This section should be discussed at PDR and finalized at CDR.
(U) This section should focus on any additional tools/scripts available for the model. The level of detail associated to additional tools needs to be thorough, similar to level of detail for native GUI. However, if creating user guides for additional tools starts to effect the timelines, NGIC needs to be alerted immediately to discuss path forward.

DRAFT

7 (U) Model Fidelity Log

(U) TIMELINE: Initial draft with sections laid out should be delivered by SRR and finalized by CDR.
(U) The model log should be a plan for model and component fidelity, derived from clear conversations with NGIC at each milestone, intel for the corresponding system, and from understanding of technical functionality of the chosen architecture. The definitions of each fidelity level are relatively static and will be provided as needed, and any changes to component fidelity levels should be in agreement with NGIC.

7.1 (U) General Model Fidelity

Table 7: (U) Overall Model Notes

UNCLASSIFIED		
General Model Fidelity		
Parametric	✓	Developed model is a system representation that includes system-specific data to drive generic algorithms or parametric equations, generating semi-empirically derived system outputs given inputs.
Engineering		Developed model is a system representation that includes system-specific data to drive system-specific tailored algorithms, generating representative system outputs given inputs.
Emulative		Developed model is a faithful representation (identical or near-identical) of the system software and hardware, generating equivalent system outputs given inputs.
		UNCLASSIFIED

(U) For subsystem tables the definitions of parametric, engineering, and emulative are specific to the subsystem type and should clearly explain technical differences in fidelity at the subsystem level.

DRAFT

7.2 (U) Model Log: Sub-System Name

Table 8: (U) Model Log: Sub-System Name

UNCLASSIFIED		
Model Log: Sub-System Name		
Parametric		WHAT PARAMETRIC FIDELITY LOOKS LIKE FOR THIS SUBSYSTEM
Engineering	✓	WHAT ENGINEERING FIDELITY LOOKS LIKE FOR THIS SUBSYSTEM
Emulative		WHAT EMULATIVE FIDELITY LOOKS LIKE FOR THIS SUBSYSTEM
Description	DESCRIPTION OF THE SUBSYSTEM	
		UNCLASSIFIED

DRAFT

8 (U) Sources

(U) **Table 9** lists the sources that were consulted to develop this UAM document.

(U) TIMELINE: Should be drafted by SRR and finalized by PDR unless later intel is expected and agreed to be included after PDR by both parties.
(U) This table should reference those source documents used to develop the model *and* write this document. Include corresponding inline citations in the paragraphs where information from each source is used. Further guidance on citation style and format to come in a later update.

Table 9: (U) References

UNCLASSIFIED			
Number	Title	Date	Declass Date
			UNCLASSIFIED

8.1 (U) Confidence Summary

(U) TIMELINE: Populated by SRR, finalized by PDR.
(U) Confidence summary for intelligence sources should be a collaborative with the NGIC SME and TPOC. Final version of confidence summary should be review/approved by NGIC NLT PDR. If additional intel is provided after PDR, then the summary should be updated and re-approved at the milestone after new intel is provided.

DRAFT

9 (U) Acronyms

UNCLASSIFIED

Term	Description	Page
ADD	*Architecture Description Document*	5
BAH	*Booz Allen Hamilton*	1
C2	*Command and Control*	2
CDR	*Critical Design Review*	2, 4, 5, 6, 10, 12, 13, 14, 15
CONOP	*Concept of Operations*	2
EWR	*Early Warning Receiver*	2
GUI	*Graphical User Interface*	9, 10, 12, 14
ITASE	*Integrated Threat Analysis and Simulation Environment*	2
J/S	*Jamming-to-Signal Ratio*	3, 10
KPI	*Key Performance Indicator*	4, 8
NGIC	*National Ground Intelligence Center*	1, 13, 14, 15
ODESSA	*Overarching Dynamic Electronic-Warfare System Standard Architecture*	1, 9, 10
PDF	*Probability Density Function*	3
PDR	*Preliminary Design Review*	2, 5, 6, 10, 12, 13
SPDW	*Simulated Pulse Descriptor Word*	3, 9
SRR	*System Requirements Review*	2, 3, 4, 15
TPOC	*Technical Point of Contact*	4
TRR	*Test Readiness Review*	10, 13
UAM	*User and Analyst Manual*	1, 5, 13, 17
UML	*Unified Modeling Language*	5
V and V	*Verification and Validation*	4

UNCLASSIFIED

DRAFT

DRAFT