Hammer stick + head – laser cut

Only the stick and the head are wood. They are **2 flat shapes, both cut from 6 mm plywood** (the laser's maximum): **2 × the stick T**, glued face to face → a **12 mm** stick, and **2 side plates**, one glued on each side of the head → a **24 mm** head. Finished sizes: stick 20 × 12, head 64 × 25 × 24. The motor upright, the hub and the stop posts are **3D printed** (stl/P7 hub with a 12.3 mm slot, P8 upright, P9 / P10 stop posts).

Send to the laser shop


File (SVG or DXF)	Thickness	How many
laser/Hammer_all_parts_6mm (all 4 pieces on one sheet, 233 × 173 mm)	**6 mm**	**1 sheet** = 2 T + 2 plates
or the same pieces split: laser/Hammer_T_layer_6mm (2 T) + laser/Hammer_head_side_plate_6mm (2 plates)		

Material	**birch plywood 6 mm** (not MDF – it splits at the bolt holes)
Scale	1:1, units mm – import **without scaling**
Lines	all lines are cut-through lines (layer CUT in the DXF, red in the SVG)
Check	the stick T must measure **222.5 mm** long and **20 mm** wide

"6 mm" plywood is often 5.5–5.8 mm. Measure the glued stick: if it is under 11.5 mm, tell me before printing the hub – the slot (12.3) can follow it.

Also needed

Wood glue (or epoxy)	–
M4×35 + nyloc	2 – hub → stick
M4×30 + nyloc	1 – through the head
Rubber / TPU pad 22 × 23 × 3	2 – one on each end of the head

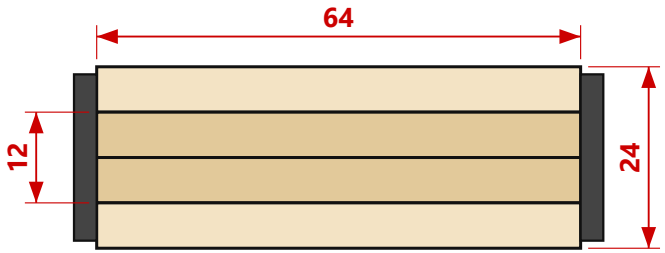

head from below: plate + 2 stick layers + plate


Checks

☐ Glued stick measures 11.5–12.2 mm thick.


☐ Stick slides into the hub slot without forcing.

☐ The side plate holes line up with the head hole of the stick.

The 2 shapes (real size at 100 %) – cut each twice – and gluing

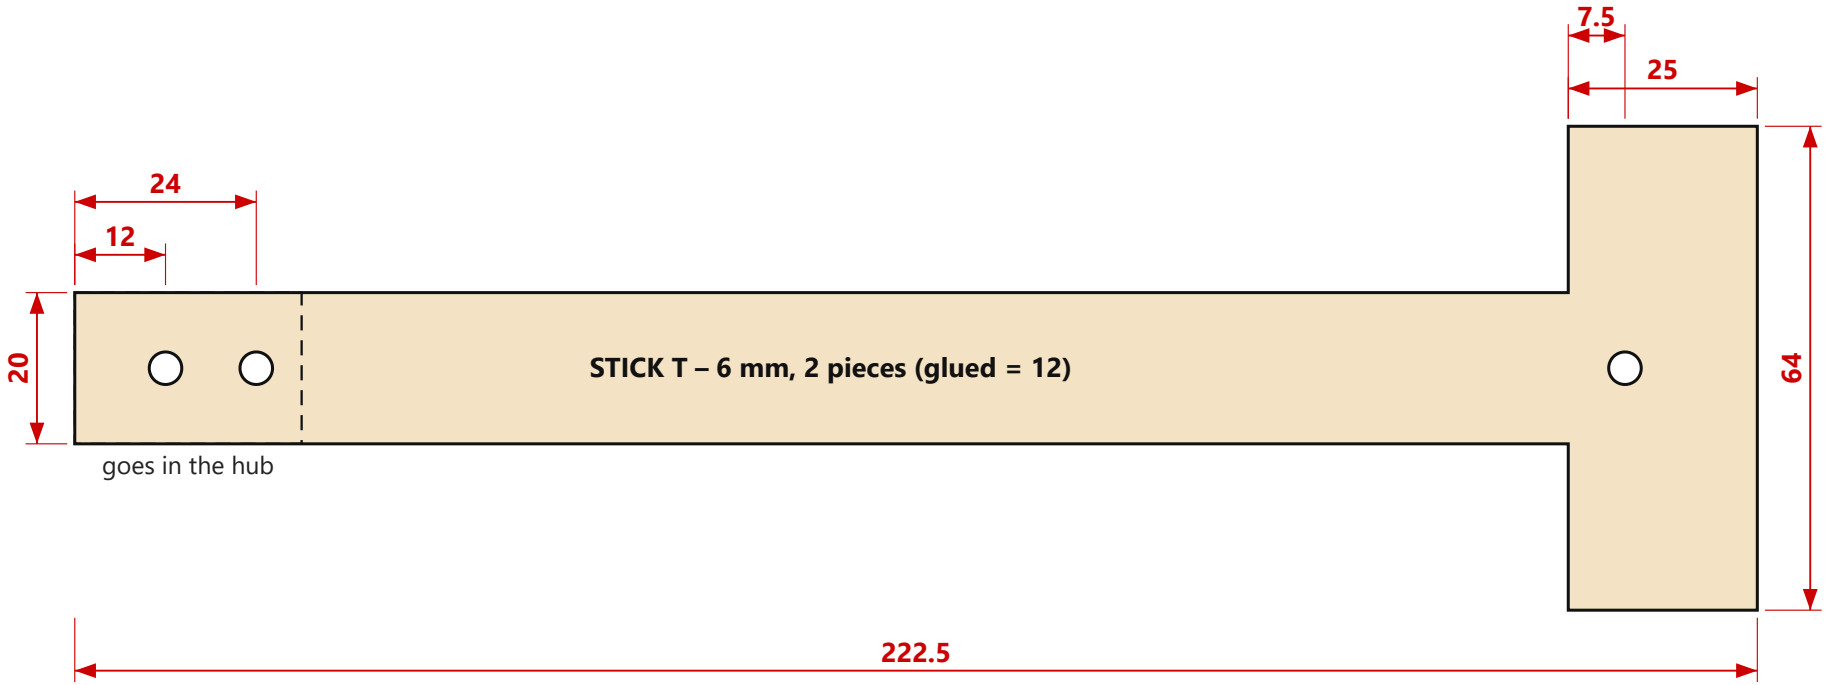

all holes Ø4.3 · the head hole is on the centre line

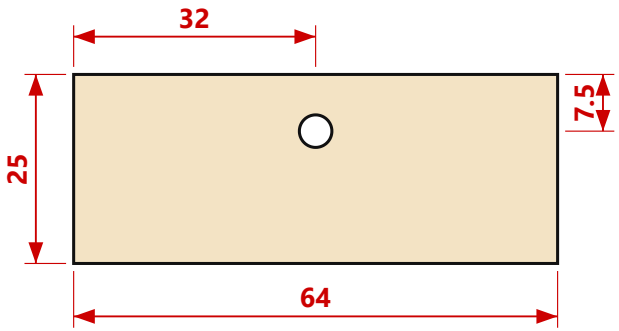

SIDE PLATE – 6 mm thick, 2 pieces

1. Glue the 2 **stick Ts** face to face (thin even layer of wood glue). Push M4 bolts through the 3 holes to line them up, clamp along the whole length, let dry → **12 mm** stick.
2. Glue the 2 **side plates** on both sides of the wide end, M4 bolt through the head hole to line them up, clamp, let dry. The head is now **64 × 25 × 24**.
3. When dry: **M4×30 + nyloc** through the head. Sand the edges.
4. Glue a rubber pad on each 25 × 24 end of the head.
5. Top 30 mm of the stick into the printed hub slot (12.3 × 20) with epoxy, **2 × M4×35** through hub + stick.