
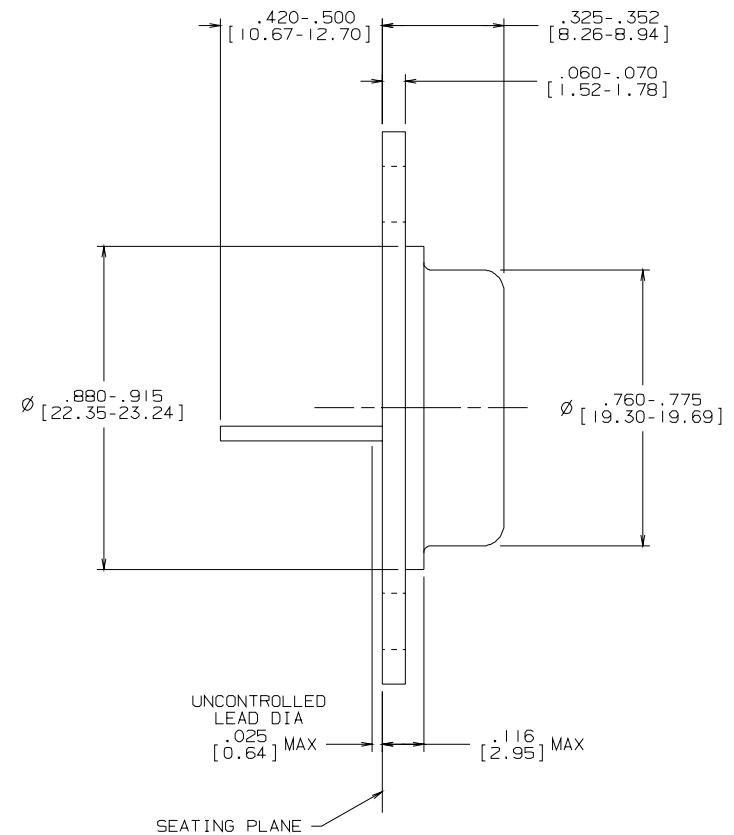


| REVISIONS | | | | |
|-----------|---------------------------------------------------------|--------|----------|----------|
| LTR | DESCRIPTION | E.C.N. | DATE | BY/APP'D |
| G | REVISE & REDRAW; ADD NOTE 4; .420-.500 WAS .420-.480 | 08823 | 10/22/91 | TL/ |

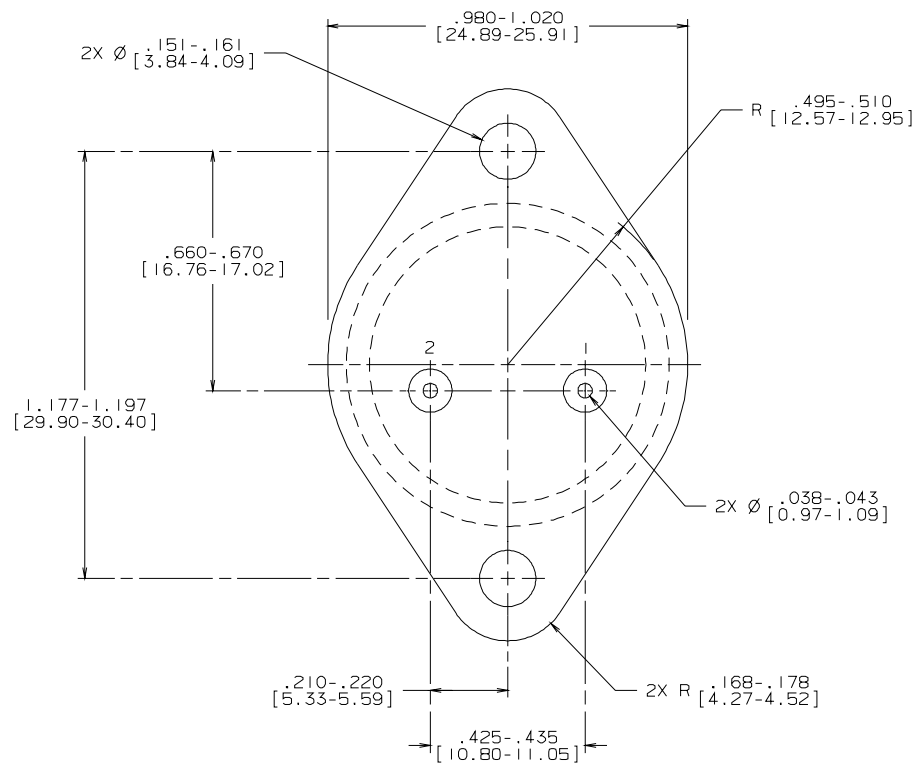

NOTES: UNLESS OTHERWISE SPECIFIED

1. STANDARD HEADER TYPE SOLID BASE.
2. STANDARD LEAD FINISH:
PER MIL-M-38510 TYPE X OR EQUIVALENT.
3. LEAD NOT BENT GREATER THAN 15°.
4. DIMENSIONS BASED ON JEDEC STANDARD TO-3
PUBLICATION 95, PAGE 98.

MIL-M-38510
CONFIGURATION CONTROL

| CONTROLLING DIMENSION: INCH | | | | |
|-----------------------------|----------|------------------------------------------------------|------|----------------|
| APPROVALS | DATE | NATIONAL SEMICONDUCTOR CORPORATION | | |
| DRAWN T. LEQUANG | 10/22/91 | 2900 Semiconductor Drive, Santa Clara, CA 95052-8090 | | |
| DFTG. CHK. | | METAL CAN(KA), TO-3, 2 LEAD | | |
| ENGR. CHK. | | | | |
| APPROVAL | | | | |
| PROJECTION | | SCALE | SIZE | DRAWING NUMBER |
| | | N/A | C | MKT-K02A |
| | | DO NOT SCALE DRAWING | | REV |
| | | SHEET | | OF |