Plastic Fiber Optic Photodiode Detector **SFH250**

**Plastic Connector Housing** **SFH250V**

Features

- 2.2 mm Aperture holds Standard 1000 Micron Plastic Fiber
- No Fiber Stripping Required
- Fast Switching Time
- Good Linearity
- Sensitive in visible and near IR Range
- Molded Microlens for Efficient Coupling
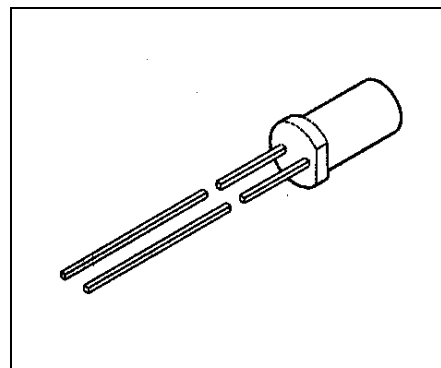
Plastic Connector Housing

- Mounting Screw Attached to the Connector
- Interference Free Transmission from light-Tight Housing
- Transmitter and Receiver can be flexibly positioned
- No Cross Talk
- Auto insertable and Wave solderable
- Supplied in Tubes
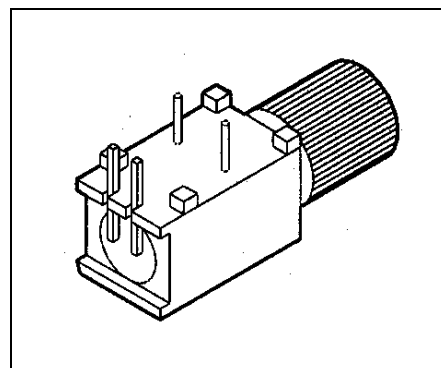
Applications

- Household Electronics
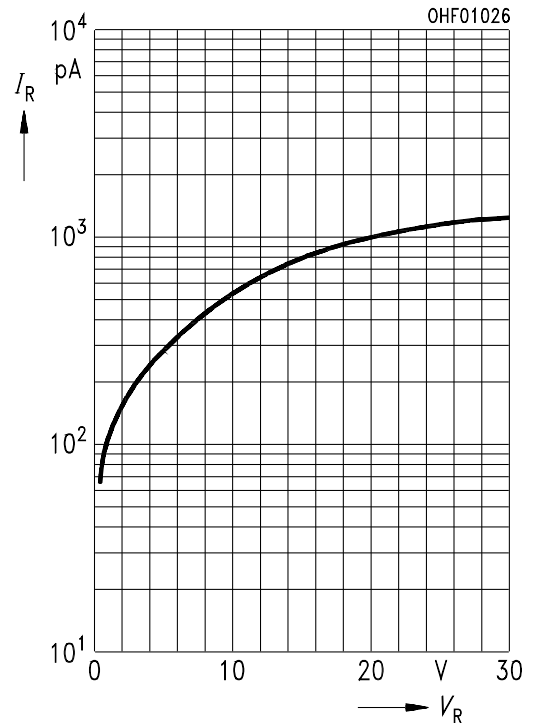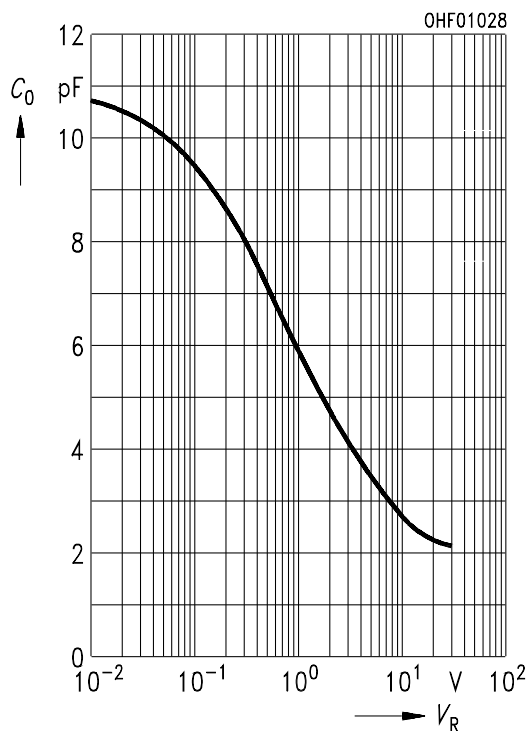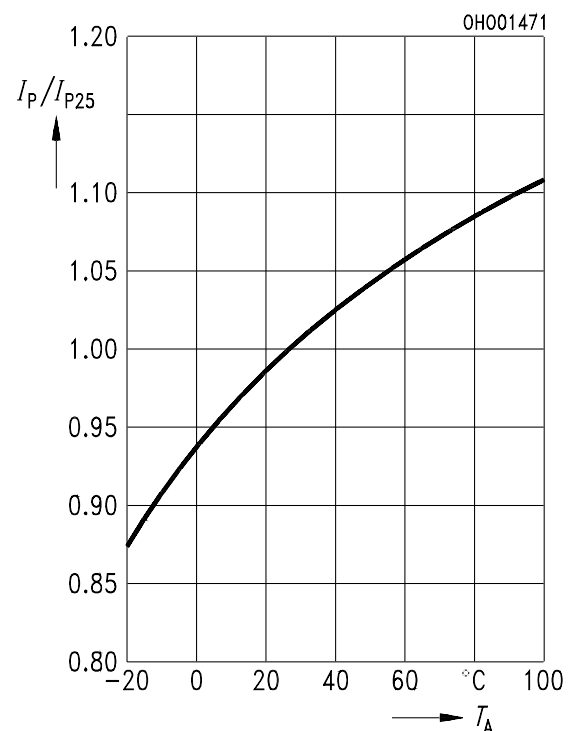- Power Electronics
- Optical Networks
- Light Barriers

Type	Ordering Code
SFH250	Q62702-P1012
SFH250V	Q62702-P0263

Technical Data

Absolute Maximum Ratings

Parameter	Symbol	Limit Values		Unit
		min.	**max.**	
Operating Temperature Range	T_{OP}	−40	+85	°C
Storage Temperature Range	T_{STG}	−40	+100	°C
Junction Temperature	T_J		100	°C
Soldering Temperature (2 mm from case bottom, $t \leq 5$ s)	T_S		260	°C
Reverse Voltage	V_R		30	V
Power Dissipation	P_{TOT}		100	mW
Thermal Resistance, Junction/Air	R_{thJA}		750	K/W

Characteristics (T_A = 25°C)

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Maximum Photosensitivity Wavelength	λ_{Smax}		850		nm
Photosensitivity Spectral Range (S = 10% S_{max})	λ	400		1100	nm
Dark Current (V_R = 20 V)	I_R		1 ($\leq$ 10)		nA
Capacitance (f = 1 MHz, V_R = 0 V)	C_O		11		pF
Rise and Fall Times of Photo Current (R_L = 50 Ω, V_R = 30 V, λ = 880 nm) 10% to 90% 90% to 10%	t_R t_F		0.01 0.01		µs
Photo Current (Φ_{IN} = 10 µW coupled from the end of a plastic fiber, V_R = 5 V) λ = 660 nm λ = 950 nm	I_P		3 ($\geq$ 1.6) 4 ($\geq$ 2.5)		µA
Temperature Coefficient I_P λ = 560 to 660 nm	TC_I		−0.04		%/K
Temperature Coefficient I_P λ = 830 nm			0.04		
Temperature Coefficient I_P λ = 950 nm			0.2		

Relative Spectral Sensitivity $S_{rel} = f(\lambda)$

OHF01129
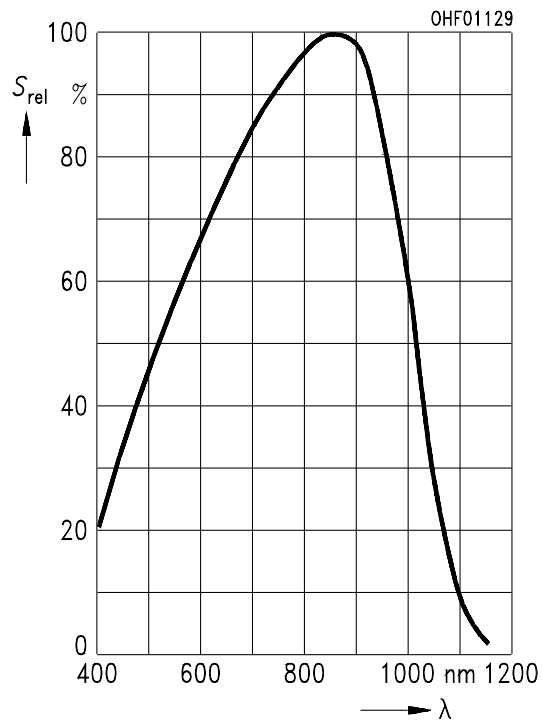
Dark Current $I_R = f(V_R)$, $T_A = 25°C$

OHF01026

Capacitance $C_0 = f(V_R)$, $f = 1$ MHz, $E_V = 0$

OHF01028

Photocurrent $I_P/I_{P25} = f(T_A)$, $\lambda = 950$ nm

OH001471

Package Outlines

SFH250

Dimensions in mm

File: 4201

Figure 1

SFH250V

Dimensions in mm

File: 4202
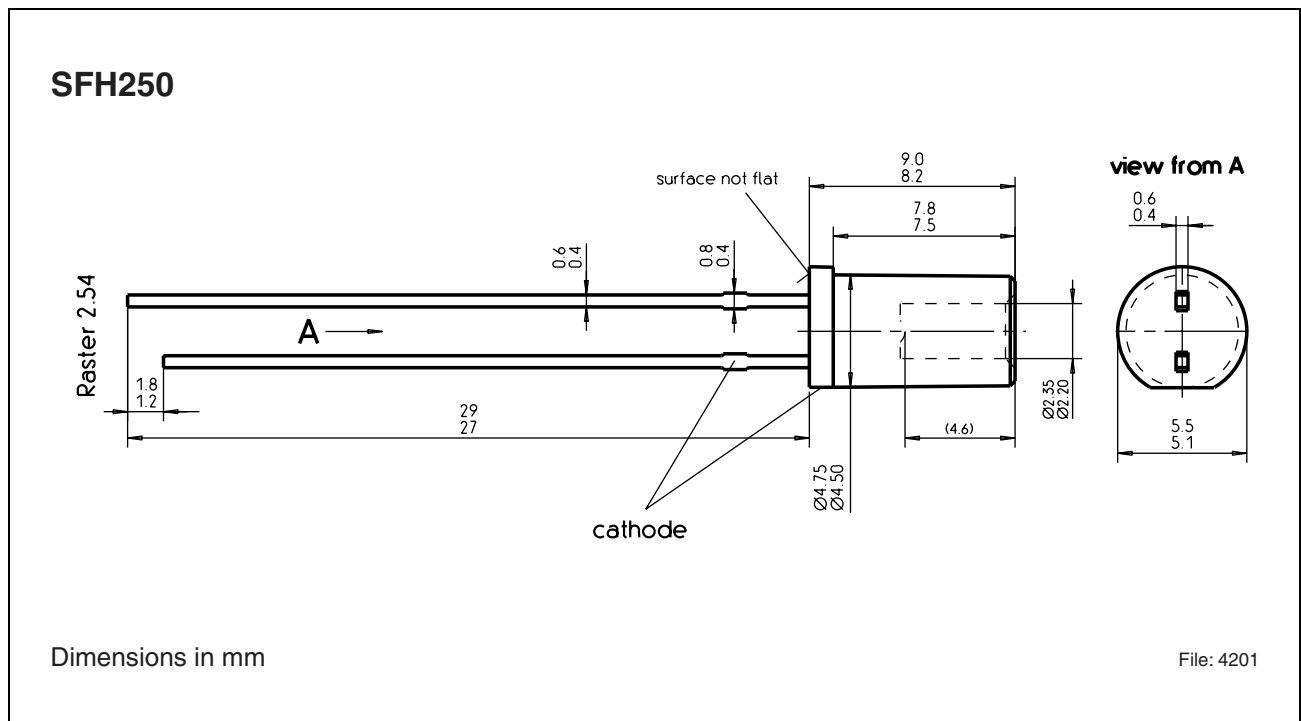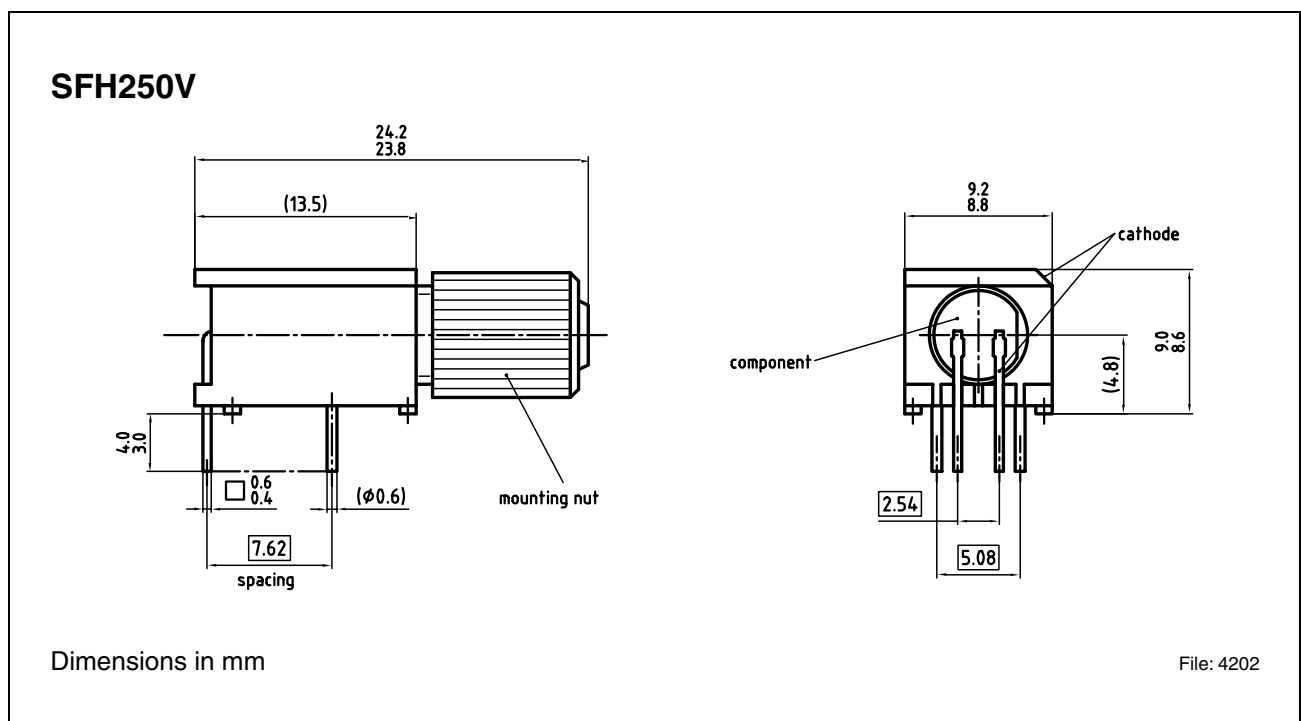
Figure 2

SFH250
SFH250V

Revision History:	**2004-03-19**	DS1
Previous Version:	2002-03-14	