


Features

- · Miniature volume, PCB usage
- · Double group individual load:1A
- Temperature range: -25°C/+55°C

Ordering Information



Contact Rating

RoHS

Contact a rrangment	A/C			
Contact resistance	50mΩ (1A 6VDC)			
Contact material	Silver alloy: AgCdO、AgSnO2、AgNi			
Contact rating	1A/125VAC			
Max switching voltage	125VAC			
Max switching current	1A			
Max switching power	125VA			
Electrical endurance (frequency: 1800 ops/h)	1x10 ⁵ ops / 1x10 ⁴ ops			
Mechanical endurance (frequency: 18000 ops/h)	1x10 ⁷ ops			

Characteristics

Insulation system		A/B	
Insulation resistance		50MΩ (500VDC)	
Dielectric Strength Leakage current 1mA	Between contacts and coil	500VAC 1 minute	
	Between open contacts	500VAC 1 minute	
Operate time(Under nominal voltage)		≤10ms	
Release time(Under nominal voltage)		≤10ms	
Humidity		85% RH (20°C)	
Ambient Temperature		-25°C~+55°C	
Shock resistance	Functional	98m/s ²	
	Destructive	980m/s²	
Vibration resistance (Double amplitude)		10Hz~55Hz 1.5mm	
Weight		Approx 9g	
Construction		Sealed	

Remark:1)All above data is initial value

Coil Data (at 20°C)

Power dissipation	Voltage	Current	Resistance		Drop-out	Max
W	VDC	mA	$\Omega \pm 10\%$	voltage	voltage	allowable
	03	66	45			
	05	41	120			
	06	33	180			
0.20W	09	22.5	400	75%Max	10%Min	110%
(H)	12	17	700			
	24	8.5	2800			
	03	120	25			
	05	71	70			
	06	60	100			
0.36W	09	40	220	75%Max	10%Min	110%
(L)	12	30	400			
	24	15	1600			

This product specification only for your reference, we will not notify you if we do any improvement. We reserve all the right for the final explanation



Web: www.songle.com www.songlerelay.com

Add.: CW7, Zone A, Far East Industrial Park, Yuyao City, Zhejiang, China Zip Code: 315400

Safety Approval Ratings




OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit:mm

Physical installation diagram

PCB board diagram (bottom view diagram)

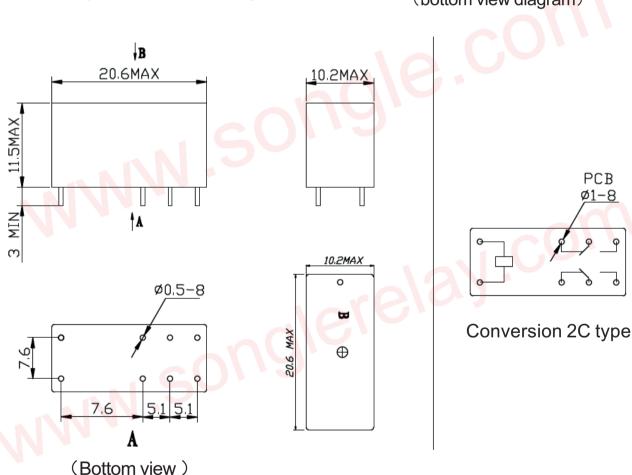

Tolerance: ±0.1mm

This product specification only for your reference, we will not notify you if we do any improvement. We reserve all the right for the final explanation



Web: www.songle.com www.songlerelay.com

Add.: CW7, Zone A, Far East Industrial Park, Yuyao City, Zhejiang, China Zip Code: 315400