FDBL86062-F085

N-Channel POWERTRENCH® MOSFET

100 V, 300 A, 2.0 mΩ

Features

- Typical $R_{DS(on)}$ = 1.5 mΩ at V_{GS} = 10 V, I_D = 80 A
- Typical $Q_{g(tot)}$ = 95 nC at V_{GS} = 10 V, I_D = 80 A
- UIS Capability
- Qualified to AEC Q101
- This Device is Pb−Free and is RoHS Compliant

Applications

- Automotive Engine Control
- PowerTrain Management
- Solenoid and Motor Drivers
- Integrated Starter/Alternator
- Primary Switch for 12 V Systems

ON Semiconductor®

www.onsemi.com



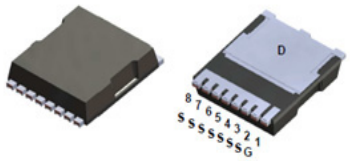

H−PSOF8L 11.68x9.80
CASE 100CU

MARKING DIAGRAM



$Y	= ON Semiconductor Logo
&Z&3	= Data Code (Year & Week)
&K	= Lot
FDBL86062	= Specific Device Code

ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

MOSFET MAXIMUM RATINGS T_J = 25°C unless otherwise noted

Symbol	Parameter		Rating	Units
V_{DSS}	Drain−to−Source Voltage		100	V
V_{GS}	Gate−to−Source Voltage		±20	V
I_D	Drain Current - Continuous (V_{GS} = 10) (Note 1)	T_C = 25°C	300	A
	Pulsed Drain Current	T_C = 25°C	See Figure 4	
E_{AS}	Single Pulse Avalanche Energy (Note 2)		352	mJ
P_D	Power Dissipation		429	W
	Derate Above 25°C		2.9	W/°C
T_J, T_{STG}	Operating and Storage Temperature		−55 to +175	°C
$R_{\theta JC}$	Thermal Resistance, Junction to Case		0.35	°C/W
$R_{\theta JA}$	Maximum Thermal Resistance, Junction to Ambient (Note 3)		43	°C/W

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Current is limited by silicon.
2. Starting T_J = 25°C, L = 0.1 mH, I_{AS} = 84 A, V_{DD} = 100 V during inductor charging and V_{DD} = 0 V during time in avalanche.
3. $R_{\theta JA}$ is the sum of the junction−to−case and case−to−ambient thermal resistance, where the case thermal reference is defined as the solder mounting surface of the drain pins. $R_{\theta JC}$ is guaranteed by design, while $R_{\theta JA}$ is determined by the board design. The maximum rating presented here is based on mounting on a 1 in^2 pad of 2oz copper.

PACKAGE MARKING AND ORDERING INFORMATION

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FDBL86062	FDBL86062−F085	MO−299A	13”	24 mm	2000 Units

ELECTRICAL CHARACTERISTICS T_J = 25°C, unless otherwise noted

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Units
OFF CHARACTERISTICS							
B_{VDSS}	Drain−to−Source Breakdown Voltage	I_D = 250 μA, V_{GS} = 0 V		100	–	–	V
I_{DSS}	Drain−to−Source Leakage Current	V_{DS} = 100 V, V_{GS} = 0 V	T_J = 25°C	–	–	5	μA
			T_J = 175°C (Note 4)	–	–	2	mA
I_{GSS}	Gate−to−Source Leakage Current	V_{GS} = ±20 V		–	–	±100	nA
ON CHARACTERISTICS							
$V_{GS(th)}$	Gate to Source Threshold Voltage	V_{GS} = V_{DS}, I_D = 250 μA		2.0	3.1	4.5	V
$R_{DS(on)}$	Drain to Source On Resistance	I_D = 80 A, V_{GS} = 10 V	T_J = 25°C	–	1.5	2.0	mΩ
			T_J = 175°C (Note 4)	–	3.3	4.3	
DYNAMIC CHARACTERISTICS							
C_{iss}	Input Capacitance	V_{DS} = 50 V, V_{GS} = 0 V, f = 1 MHz		–	6970	–	pF
C_{oss}	Output Capacitance			–	3950	–	
C_{rss}	Reverse Transfer Capacitance			–	29	–	
R_g	Gate Resistance	f = 1 MHz		–	0.4	–	Ω
$Q_{g(ToT)}$	Total Gate Charge at 10 V	V_{GS} = 0 to 10 V	V_{DD} = 80 V, I_D = 80 A	–	95	124	nC
$Q_{g(th)}$	Threshold Gate Charge	V_{GS} = 0 to 2 V		–	13	–	
Q_{gs}	Gate−to−Source Gate Charge			–	31	–	
Q_{gd}	Gate−to−Drain “Miller” Charge			–	20	–	

ELECTRICAL CHARACTERISTICS (continued) T_J = 25°C, unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
SWITCHING CHARACTERISTICS						
t_{on}	Turn−On Time	V_{DD} = 50 V, I_D = 80 A, V_{GS} = 10 V, R_{GEN} = 6 Ω	−	−	73	ns
$t_{d(on)}$	Turn−On Delay		−	31	−	
t_r	Rise Time		−	25	−	
$t_{d(off)}$	Turn−Off Delay		−	36	−	
t_f	Fall Time		−	9	−	
t_{off}	Turn−Off Time		−	−	59	
DRAIN−SOURCE DIODE CHARACTERISTICS						
V_{SD}	Source−to−Drain Diode Voltage	I_{SD} = 80 A, V_{GS} = 0 V	−	−	1.25	V
		I_{SD} = 40 A, V_{GS} = 0 V	−	−	1.2	
t_{rr}	Reverse−Recovery Time	I_F = 80 A, dI_{SD}/dt = 100 A/μs, V_{DD} = 80 V	−	115	150	ns
Q_{rr}	Reverse−Recovery Charge		−	172	224	nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. The maximum value is specified by design at T_J = 175°C. Product is not tested to this condition in production.

TYPICAL CHARACTERISTICS

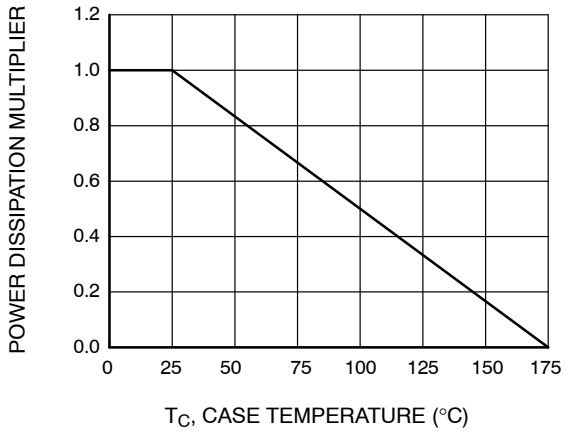

Figure 1. Normalized Power Dissipation vs. Case Temperature

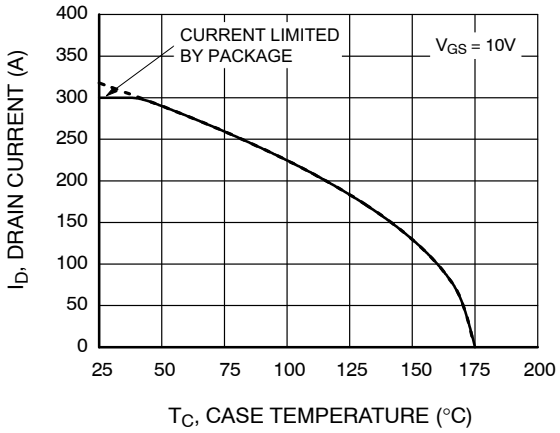

Figure 2. Maximum Continuous Drain Current vs. Case Temperature

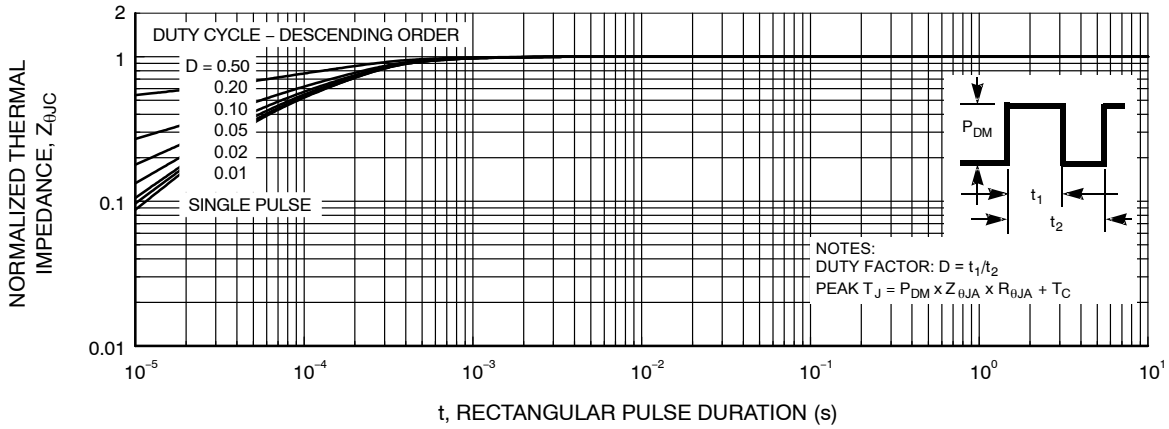

Figure 3. Normalized Maximum Transient Thermal Impedance

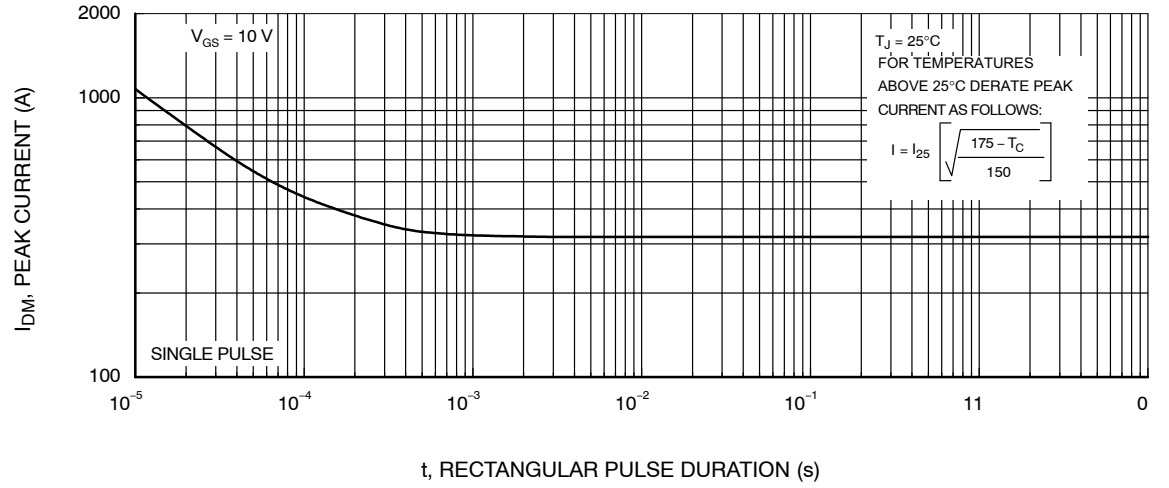

Figure 4. Peak Current Capability

TYPICAL CHARACTERISTICS (continued)

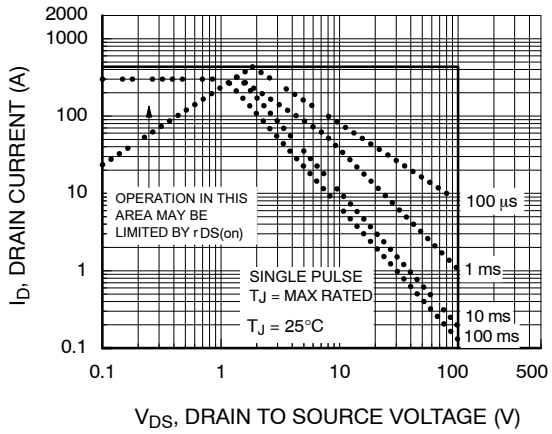

Figure 5. Forward Bias Safe Operating Area

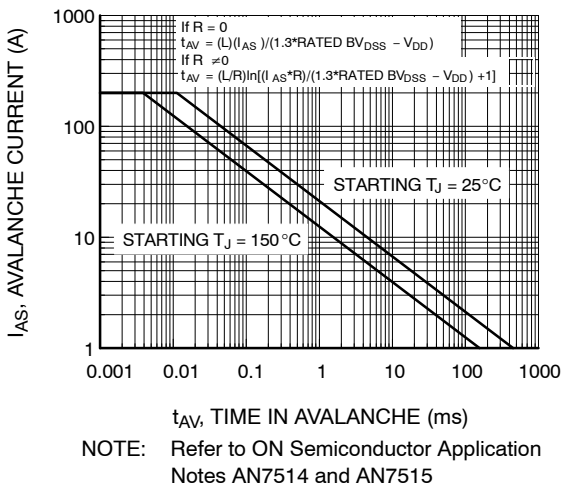

NOTE: Refer to ON Semiconductor Application Notes AN7514 and AN7515

Figure 6. Unclamped Inductive Switching Capability

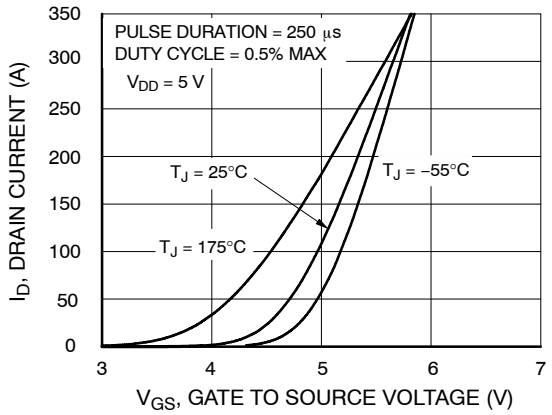

Figure 7. Transfer Characteristics

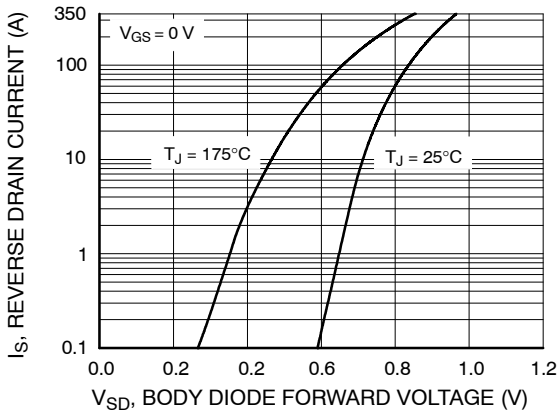

Figure 8. Forward Diode Characteristics

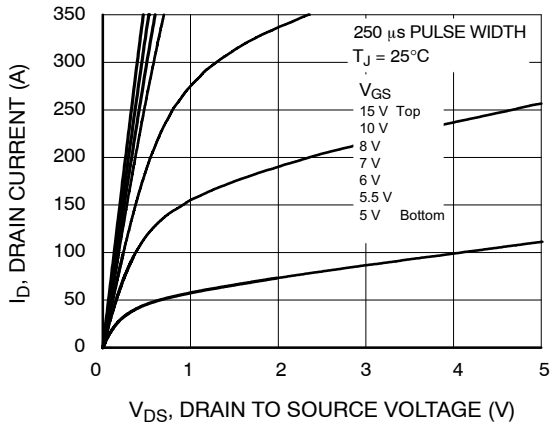

Figure 9. Saturation Characteristics

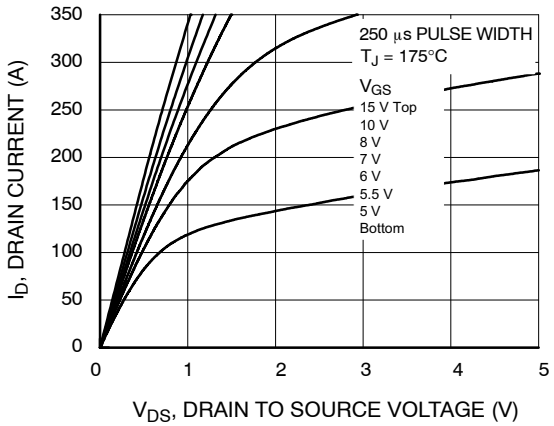

Figure 10. Saturation Characteristics

TYPICAL CHARACTERISTICS (continued)

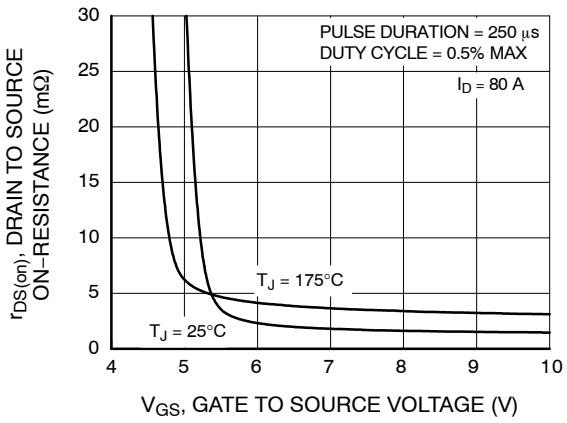

Figure 11. R_{DSON} vs. Gate Voltage

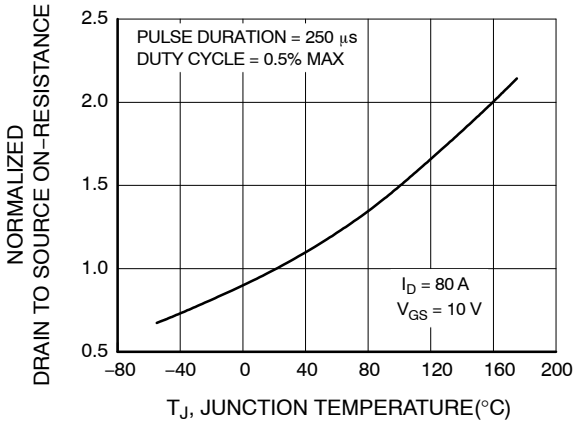

Figure 12. Normalized R_{DSON} vs. Junction Temperature

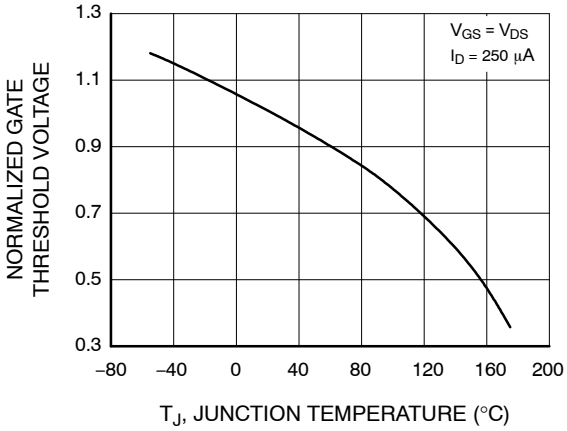

Figure 13. Normalized Gate Threshold Voltage vs. Temperature

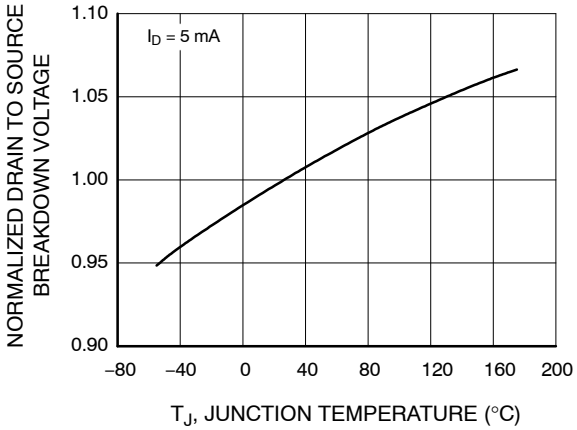

Figure 14. Normalized Drain to Source Breakdown Voltage vs. Junction Temperature

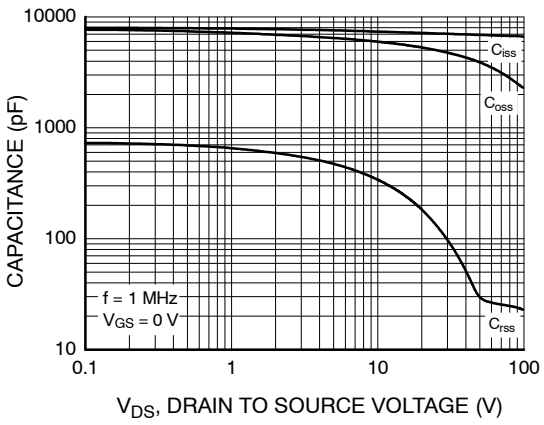

Figure 15. Capacitance vs. Drain to Source Voltage

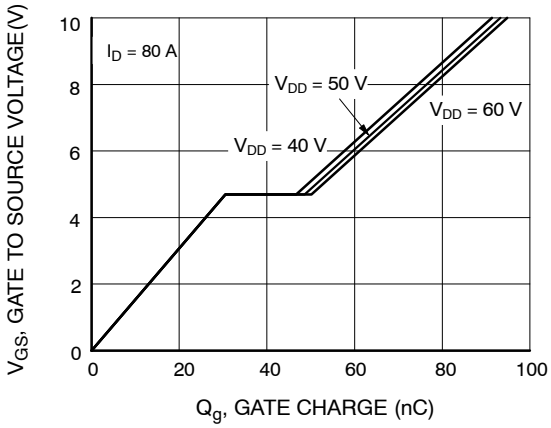

Figure 16. Gate Charge vs. Gate to Source Voltage

MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS

H−PSOF8L 11.68x9.80
CASE 100CU
ISSUE B

DATE 20 MAY 2022

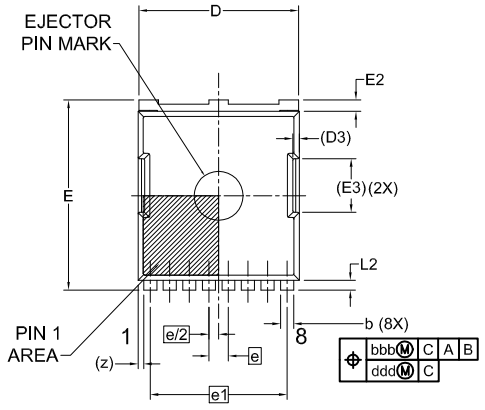

TOP VIEW



SIDE VIEW



DETAIL "A"
SCALE: 2X

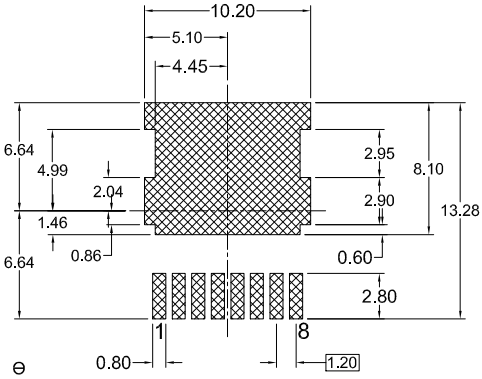

LAND PATTERN RECOMMENDATION

*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.



FRONT VIEW



DETAIL "B"
SCALE: 2X

NOTES:
1. PACKAGE STANDARD REFERENCE: JEDEC MO-299, ISSUE A.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
3. CONTROLLING DIMENSION: MILLIMETERS.
4. COPLANARITY APPLIES TO THE EXPOSED WELL AS THE TERMINALS.
5. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.
6. SEATING PLANE IS DEFINED BY THE TERMINALS. "A1" IS DEFINED AS THE DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.

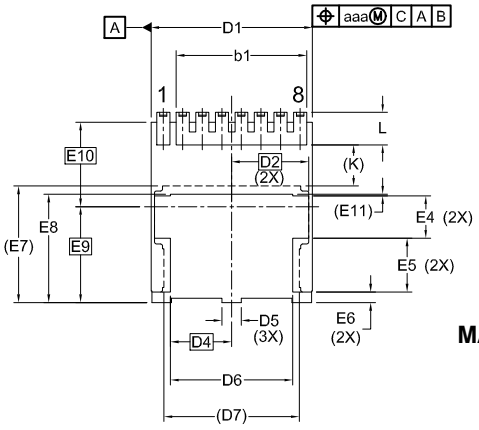

BOTTOM VIEW

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	2.20	2.30	2.40
A1	1.70	1.80	1.90
b	0.70	0.80	0.90
b1		8.00 REF	
c	0.40	0.50	0.60
c1	0.10	---	---
D	9.70	9.80	9.90
D1	9.80	9.90	10.00
D2		4.73 BSC	
D3		0.40 REF	
D4		3.75 BSC	
D5	---	1.20	---
D6	7.40	7.50	7.60
D7		8.30 REF	
E	11.58	11.68	11.78
E1	10.28	10.38	10.48
E2	0.60	0.70	0.80
E3		3.30 REF	
E4	---	2.60	---
E5	---	3.30	---

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
E6	—	0.65	---
E7		7.15 REF	
E8	6.55	6.65	6.75
E9		5.89 BSC	
E10		5.19 BSC	
E11		0.10 REF	
e		1.20 BSC	
e/2		0.60 BSC	
e1		8.40 BSC	
K	2.43	2.53	2.63
L	1.90	2.00	2.10
L2	0.50	0.60	0.70
z		0.35 REF	
Θ	0°	---	12°
aaa		0.20	
bbb		0.25	
ccc		0.20	
ddd		0.20	
eee		0.10	

GENERIC MARKING DIAGRAM*



A = Assembly Location
Y = Year
WW = Work Week
ZZ = Assembly Lot Code
XXXX = Specific Device Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98AON13813G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**H−PSOF8L 11.68x9.80**	**PAGE 1 OF 1**

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT
North American Technical Support:
Voice Mail: 1 800−282−9855 Toll Free USA/Canada
Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:
Phone: 00421 33 790 2910
For additional information, please contact your local Sales Representative

◊