
Walnut Case — Quote Drawing v0.3

Forest Guardian / DialCanvas Desk Edition | ONE-OFF QUOTE DESIGN | DIMENSIONS NOMINAL | NOT FOR FABRICATION

QUOTATION ONLY

Quote this defined profile and envelope

A FRONT ELEVATION (outside)

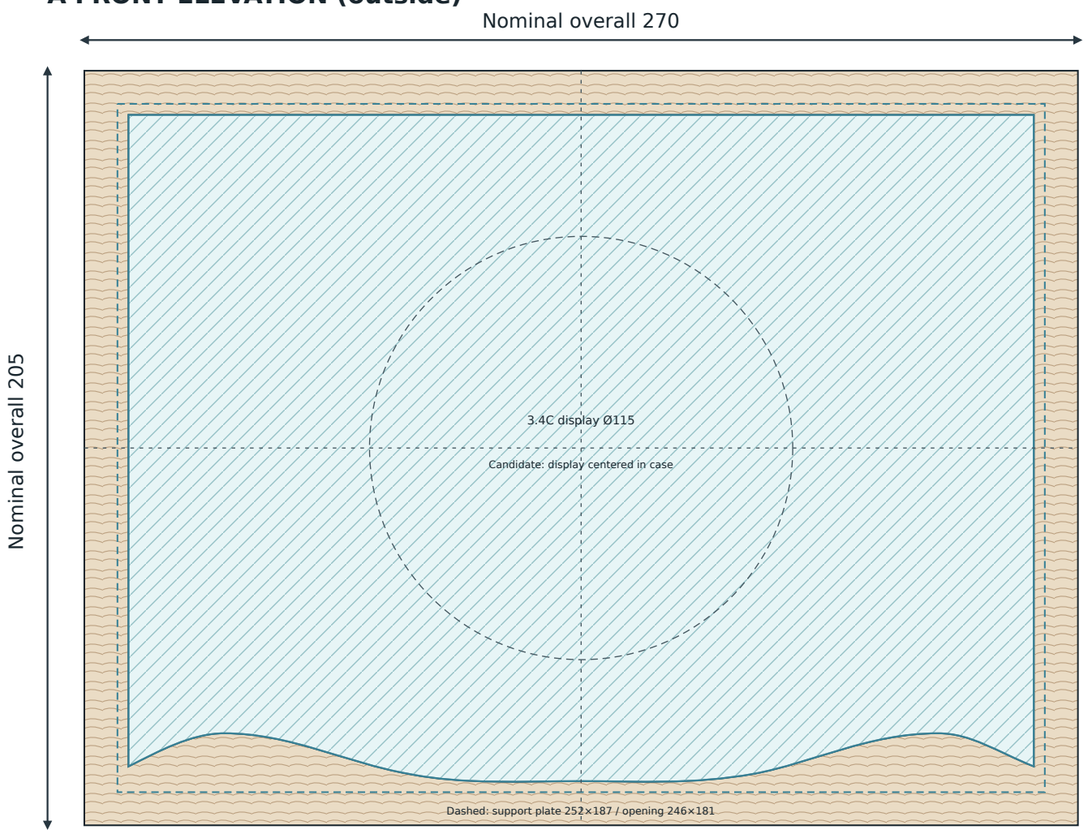


P1: walnut 9 thick; outer 270×205; opening envelope 246×181.

Opening lower edge follows a smooth wave. Guide points (x,y mm from top-left):

(12,189), (38,180), (88,191), (135,193), (182,191), (232,180), (258,189); smooth between.

Profile ±2mm; keep at least 12mm lower rail. The curve is the dimensioned interpretation of the concept board.

B SIDE VIEW (internal parts schematic)

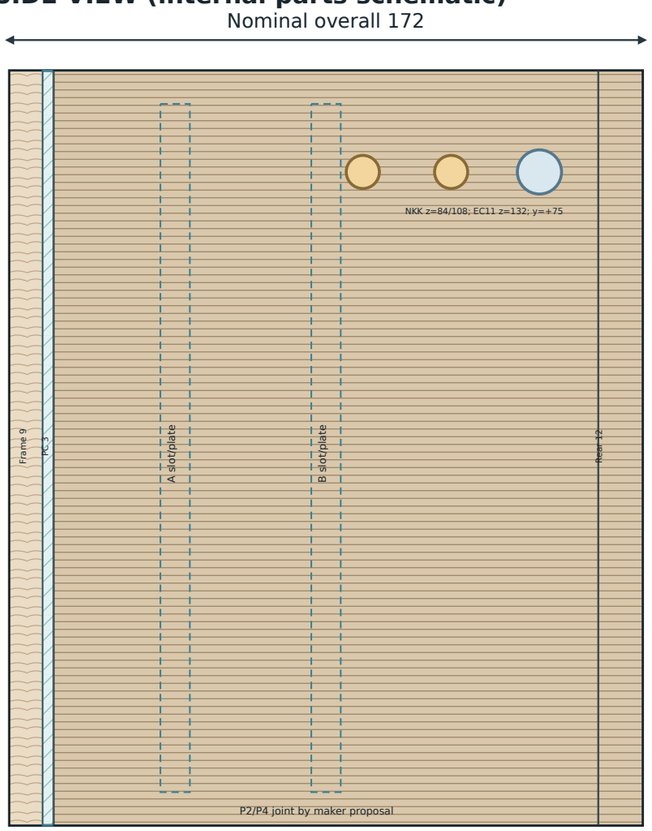


Front to back: walnut frame 9 + PC 3 + body 148 + rear cover 12 = 172


Grooves from outside front: A 40.5–49.5, B 81.5–90.5 (9 wide)

P4: Neutrik USB-C D-cutout 24×19; 2×Ø3.2 mounting holes, 31 pitch

C TOP VIEW (envelope and walls)

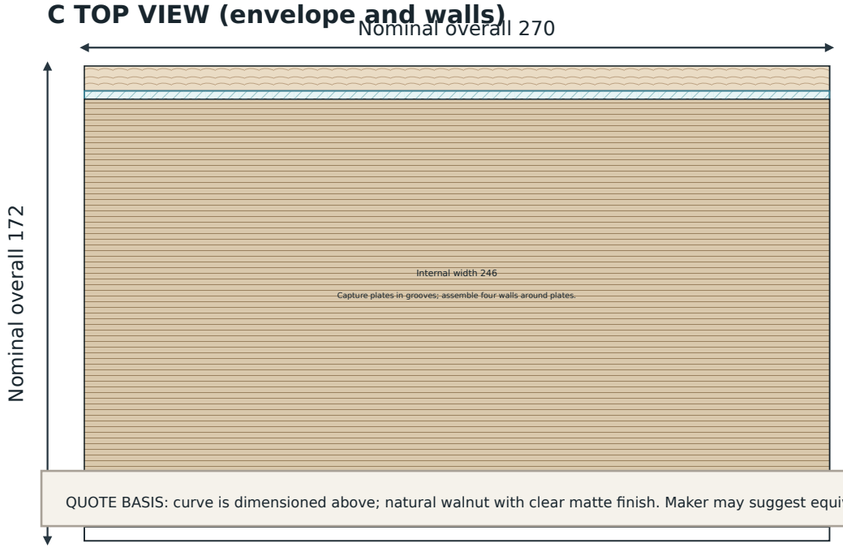

D SUPPORT SLOT SECTION (schematic)

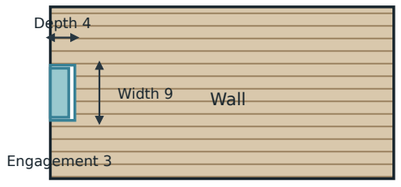

Clear PC plate: 8 thick

Slot: 9 wide × 4 deep

PET shim during final assembly

Opening envelope 246×181; curved lower edge

Support plates: 2 × 252×187×8

Plate engagement in each wall: 3mm


P2: NKK ×2 at z=84/108, EC11 at z=132; all y=+75

QUOTE BASIS: curve is dimensioned above; natural walnut with clear matte finish. Maker may suggest equivalent joinery; fabrication requires owner approval.

Walnut Case — Quote Parts v0.3


ONE-OFF NOMINAL DIMENSIONS SET FOR QUOTATION | NOT FOR FABRICATION.

P1 FRONT FRAME (1 pc, solid walnut)

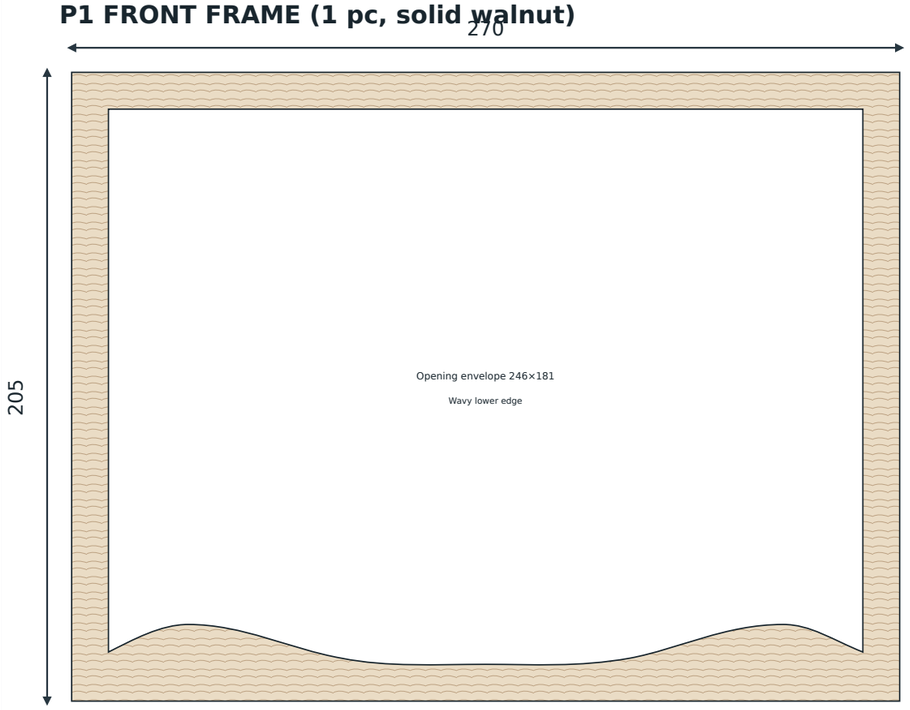

9 thick; outer 270×205; soft 1mm edge break.
Opening envelope 246×181; minimum lower rail 12mm.
Curve guide from P1 top-left (x,y mm):
(12,189), (38,180), (88,191), (135,193),
(182,191), (232,180), (258,189); smooth, ±2mm.

P2 SIDE PANELS (2)

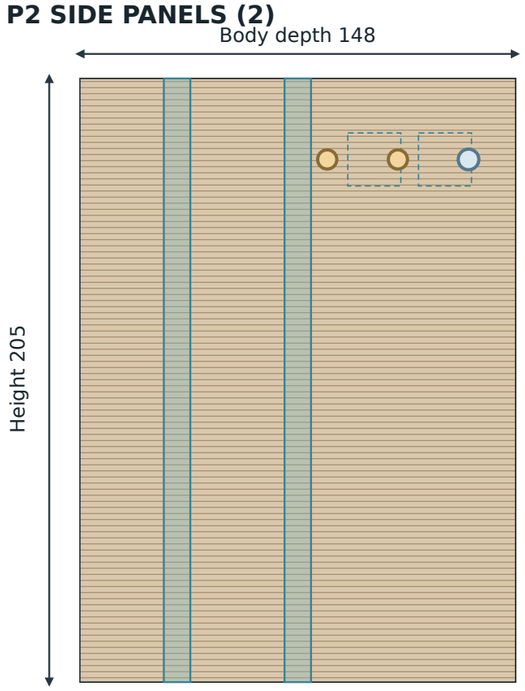


12 thick; side panels 205×148.
Grooves 9w×4d at z28.5–37.5 and
69.5–78.5; datum is guard inner face.
Right side: NKK Ø6.5+keyway, z84/108;
EC11 Ø7, z132; all y=+75.
Inside relief 18×18×9.4; leave 2.6 wall.

P3 TOP/BOTTOM PANELS (1 each)



12 thick × 148 deep; grooves match P2.
Assemble walls around both support plates.

P4 REAR COVER (1 pc)

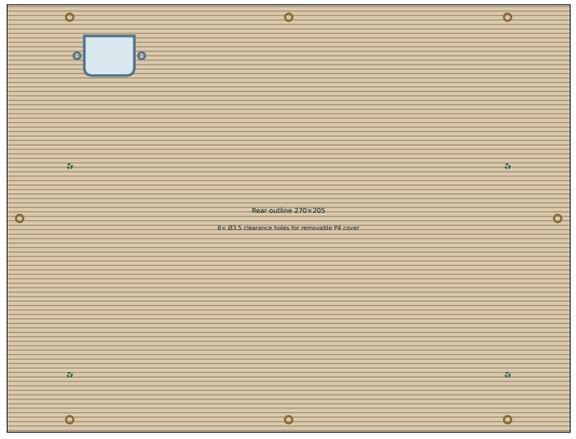

12 thick; 8×Ø3.5 clearance holes align to P2/P3 wall centerlines (CSV coordinates).
4×Ø2×8 blind pilot holes on inside for 230×120 PC tray (CSV coordinates).
Neutrik X=-86/Y=+78; D-cut 24×19; 2×Ø3.2 @31; 8×3.1×25 screws.

PARTS SCHEDULE (one unit)

No.	Qty	Material / dimensions (mm)
P1	1	Solid walnut 270×205×9; curved opening 246×181 max.
P2	2	Walnut-veneer ply 205×148×12
P3	2	Walnut-veneer ply 246×148×12
P4	1	Walnut-veneer ply 270×205×12
G1	2	PC support 252×187×8
G2	1	Clear PC guard 270×205×3; outline to match P1
—	—	PET shim: adjust at final assembly

QUOTE ITEMS TO PRICE

- P1 opening and dimensioned lower wave
- Two 9×4 slots in P2/P3
- Corner joints and plate assembly order
- Removable P4, front frame and guard retention
- Walnut grade, grain, finish options/cost
- PET shim allowance for plate thickness
- Itemized machining, material, shipping, lead time

DIMENSION BASIS

One-off envelope: 270×205×172 nominal

Depth stack: P1 9 + G2 3 + body 148

+ P4 12 = overall depth 172

Internal volume: 246×181×148

G1 engagement: 3mm per side

QUOTE NOTES

Natural walnut; clear matte finish, no stain.

Price material, machining and shipping separately.

Suggest practical joinery; fabrication needs approval.