AIRS deconvolution and the translation of AIRS to CrIS radiances

H. E. Motteler, L. L. Strow

UMBC Atmospheric Spectroscopy Lab
Joint Center for Earth Systems Technology

October 24, 2017

AIRS spectral response functions

- Each AIRS channel i has an associated spectral response function or SRF $\sigma_i(v)$, where v is frequency.
- Channel radiance $c_i = \int \sigma_i(v) r(v) \, dv$, where r is radiance at frequency v.
- The center or peak of σ_i is the nominal channel frequency.
- We can approximate the AIRS SRFs with a generalized Gaussian of the form

$$w(v, v_0, \text{FWHM}) = \exp\left(-\left(\frac{(v - v_0)^2}{2c^2}\right)^{1.5}\right)$$

where $c = \text{FWHM}/(2\sqrt{2\ln 2})$ and v_0 is the desired channel center.

- The exponent 1.5 was chosen to give an approximate match to AIRS SRFs with the same FWHM and channel centers, though without the fine structure and variation.

sample SRFs and resolving power
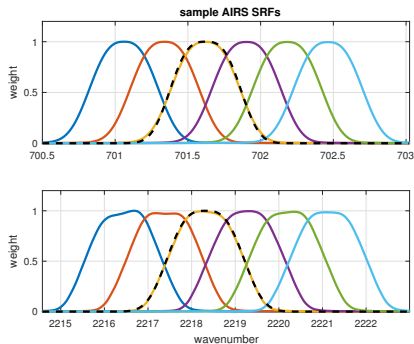
Sample AIRS spectral response functions from the low and high ends of the band. The dashed line is the generalized Gaussian function.
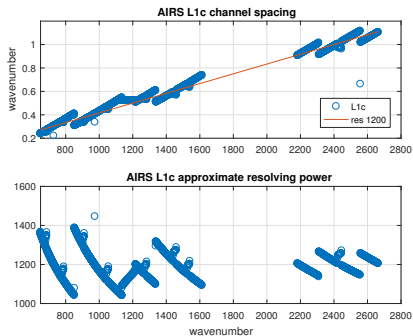
AIRS L1c channel spacing and resolving power, $R = v_i / \mathrm{FWHM}_i$. The relatively regular L1c channel spacing aids the deconvolution.
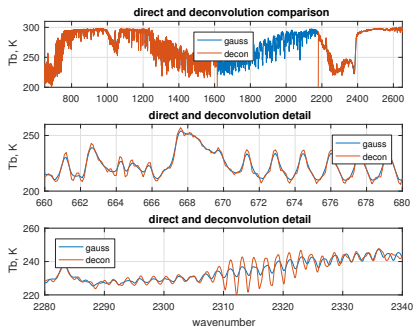
the AIRS deconvolution

▶ Let $\vec{v}_b = v_1, v_2, \ldots, v_m$ be a 0.1 cm^{-1} grid spanning the domains of the functions σ_i.

▶ This is the approximate resolution of the SRF measurements and convenient for reconvolution to the CrIS user grid.

▶ Let S_b be an $n \times m$ array where row i is $\sigma_i(v)$ tabulated at the $\vec{v}_b$ grid, with rows normalized to 1.

▶ Note that the $\sigma_i(v)$ are the measured SRFs, not our Gaussian approximation.

▶ If r is radiance at the $\vec{v}_b$ grid, then $c = S_b r$ is a reasonable approximation of $\int \sigma_i(v) r(v) \, dv$.

▶ We want to start with c and find r, that is to deconvolve c by solving $S_b r = c$ for r.

▶ Since $m < k$ the system is underdetermined.

the AIRS deconvolution

- We take the Moore-Penrose pseudoinverse of S_b to get $r_0 = S_b^{-1}c$.
- This gives a minimal solution, in the sense that $||r_0||_2 \leq ||r_j||_2$ for all r_j satisfying $S_b r_j = c$.
- The condition number for S_b as built from the L1c channels is $||S_b||_2 ||S_b^{-1}||_2 = 115$, which is tolerable.
- Although our main goal is to reconvolve the 0.1 cm^{-1} intermediate representation to the CrIS or other user grids, we first compare the deconvolved radiances with reference truth from a direct convolution to the intermediate grid.
- We use the generalized Gaussian as reference truth for the 0.1 cm^{-1} intermediate grid with FWHM $= v_i/2000$, where v_i are the grid frequencies.
- This represents a hypothetical grating spectrometer with a resolving power of 2000, oversampled to the 0.1 cm^{-1} grid.

examples of deconvolution

Spectra from fitting profile 1 for direct convolution to the 0.1 cm^{-1} grid and for deconvolved AIRS. We see some overshoot and ringing in the deconvolution.
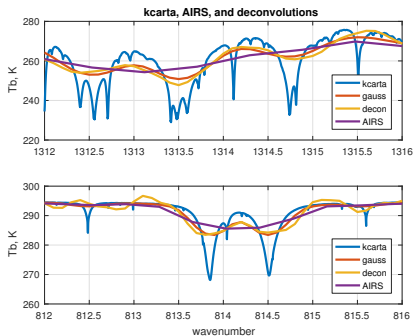
Details from fitting profile 1 for kcarta, direct convolution to the 0.1 cm^{-1} grid, deconvolved AIRS, and true AIRS. The deconvolution restores some detail.

deconvolution notes

- The AIRS deconvolution gives a modest resolution enhancement, at the cost of added artifacts and noise.
- The deconvolution captures some fine structure that is present in the direct convolution but not the AIRS data and can resolves lines that are merged in the AIRS L1c spectra
- But we also see some ringing and overshoot that is not present in the direct convolution.
- These artifacts are acceptable because we do not propose using the deconvolved radiances directly; they are an intermediate step before reconvolution to a lower resolution.

AIRS to CrIS translation

- Given AIRS deconvolution to a 0.1 cm^{-1} intermediate grid, reconvolution to the CrIS user grid is straightforward.
- For the CrIS standard resolution the channel spacing is 0.625 cm^{-1} for the LW band, 1.25 cm^{-1} for the MW, and 2.5 cm^{-1} for the SW.
- For each CrIS band, we
  1. find the AIRS and CrIS band intersection,
  2. apply a bandpass filter to the deconvolved AIRS radiances restricting them to the intersection, with a rolloff outside the intersection, and
  3. reconvolve the filtered spectra to the CrIS user grid with a zero-filled double Fourier transform
- The basic translation is from AIRS to unapodized CrIS, but we will typically show both apodized and unapodizied residuals.

testing and validation

- ▶ Translations are tested by comparison with calculated reference truth.
- ▶ We start with a set of atmospheric profiles and calculate upwelling radiance at a 0.0025 cm^{-1} grid with kcarta over a band spanning the domains of the AIRS and CrIS response functions.
- ▶ "True AIRS" is calculated by convolving the kcarta radiances with AIRS SRFs and "true CrIS" by convolving kcarta radiances to a sinc basis at the CrIS user grid.
- ▶ True AIRS is then translated to CrIS to get "AIRS CrIS", and this is compared with true CrIS.
- ▶ For most tests we use a set of 49 fitting profiles spanning a wide range of clear atmospheric conditions, initially chosen for testing radiative transfer codes

AIRS to CrIS residuals
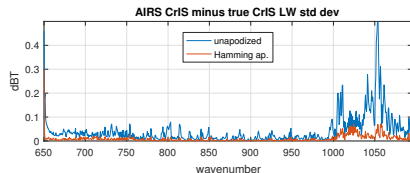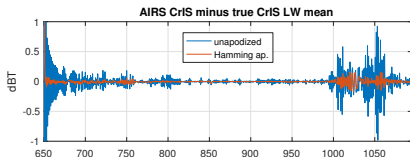
Mean and standard deviation of unapodized and Hamming apodized AIRS CrIS minus true CrIS, for the CrIS LW band
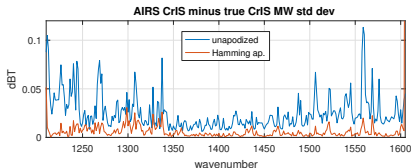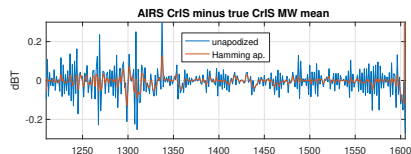
Mean and standard deviation of unapodized and Hamming apodized AIRS CrIS minus true CrIS, for the CrIS MW band
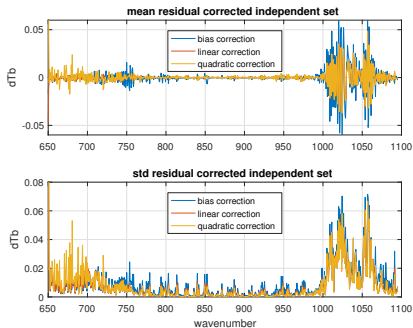
AIRS to CrIS residuals
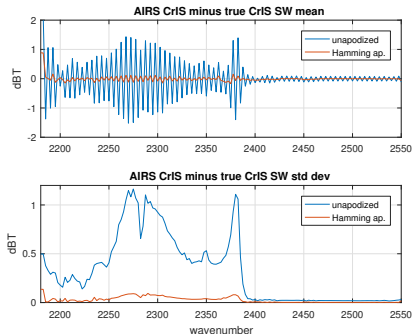
Mean and standard deviation of unapodized and Hamming apodized AIRS CrIS minus true CrIS, for the CrIS SW band.
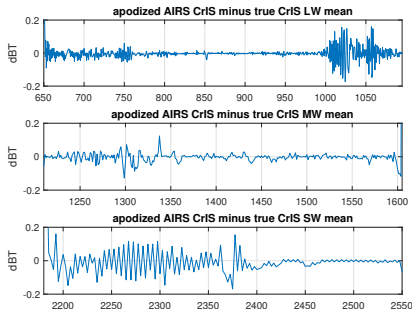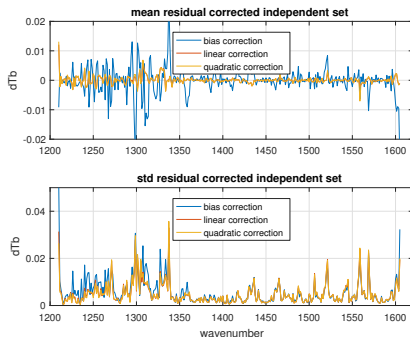
Mean of apodized residuals for all three CrIS bands, showing the apodized residuals in greater detail.

AIRS to CrIS statistical correction

Mean and standard deviation of LW corrected apodized residuals.

Mean and standard deviation of MW corrected apodized residuals.
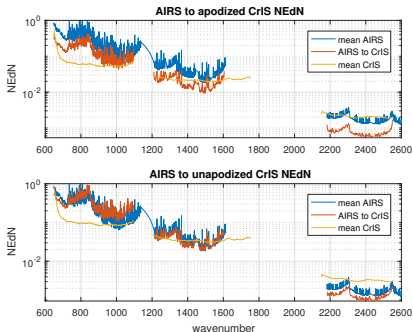
AIRS to CrIS statistical correction
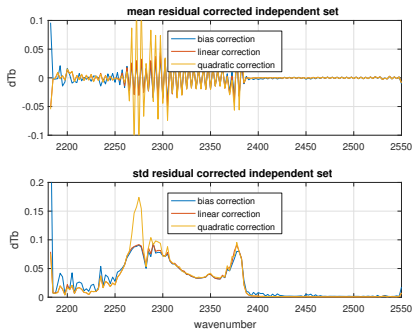
Mean and standard deviation of SW corrected apodized residuals.
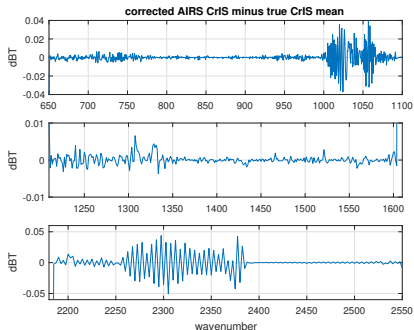
Mean corrected apodized residuals for all three bands, showing the corrected apodized residuals in greater detail.
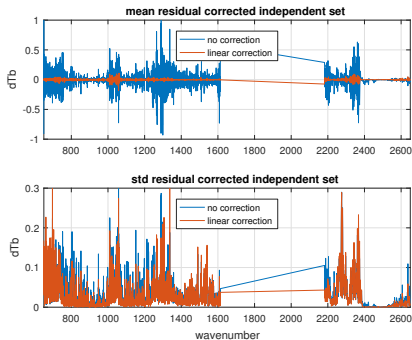
NEdN of the translation

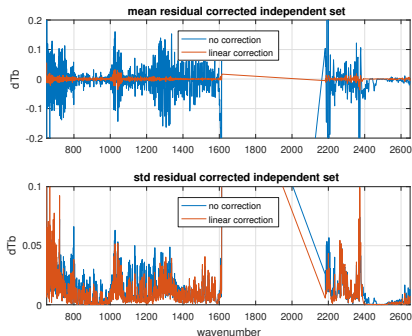mean AIRS, AIRS-to-CrIS, and mean CrIS apodized and unapodized NEdN.
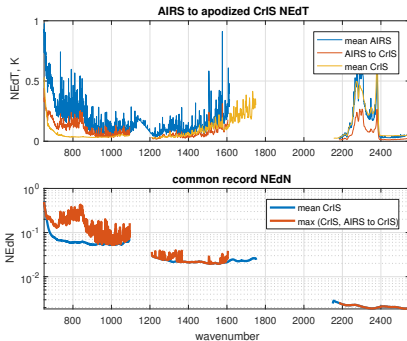
AIRS, AIRS-to-CrIS, and CrIS apodized NEdT, and the max of CrIS and AIRS-to-CrIS with CrIS NEdN shown as a reference.
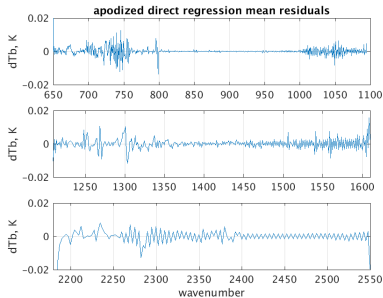
L1c to L1d translation

mean and standard deviation over the 49 fitting profiles for the L1c to L1d translation minus true L1d for a resolving power of 1200
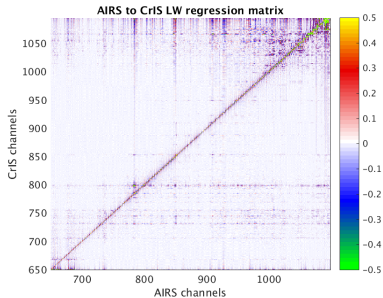
Mean and standard deviation over the 49 fitting profiles for the L1c to L1d translation minus true L1d for a resolving power of 700.
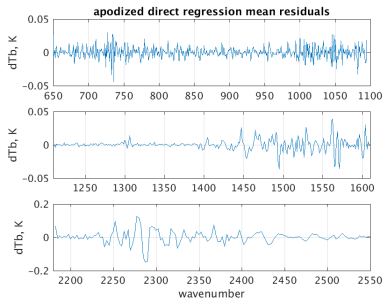
principal component regression

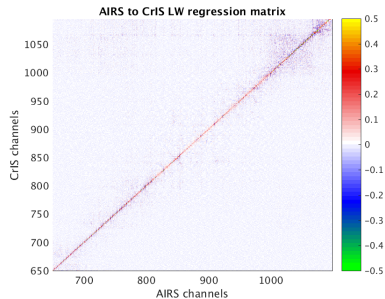Mean residuals for apodized AIRS to CrIS direct regression.

Regression coefficients for the LW direct regression.
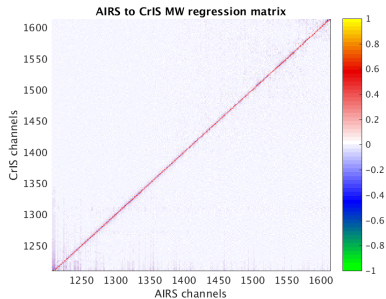
channel spacing and resolving power

Mean residuals for apodized AIRS to CrIS principal component regression.
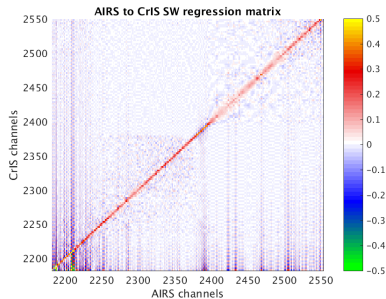

Regression coefficients for the LW principal component regression.

channel spacing and resolving power

Regression coefficients for the MW
principal component regression.

Regression coefficients for the SW
principal component regression.