

SPECIFICATIONS

TABLE TOP - MINI FREEZE DRYER

Model		Lyoph-Pride 03	
Shelf Dim.(mm) in-built Pre-Freezing	(W)275 x (D)345 x (H)16	Control range	-38~ +60℃
Clearance	70mm	Defrost	Hotgas control
Shelf Area	2+1, 0.19m ² (EA)	Condenser	-70℃
Trays Dim.(mm)	(W)165 x (D)270 x (H)30	Aeration (Option)	N2
Internal Dim.(mm)	(W)360 x (D)470 x (H)232		Flask
ICE Capacity (Liters)	4L	Condenser area 36*47*10cm	Monitoring
External Dim.(mm)	(W)700 x (D)764 x (H)865		
Option	Stoppering	electrical type	
	manifold chamber		

DETAIL & FEATURES

PILOT SERIES




LCD Touch Screen

LCD Touch Screen touch panel allows easy and convenient control. With data analysis by graphic trend for automatic monitoring.



Temperature recorder

Current status is being monitored. Any event must be recorded and reported, program status is displayed.

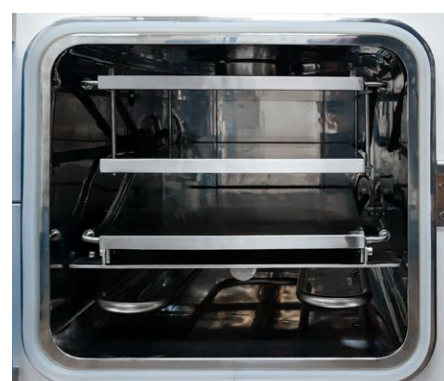

Drying Chamber with condenser

Sophisticated design for fine quality drying results. *Stoppering(Optional): Sealing is completed under vacuum condition (0.3mBar) automatically.

Product Inquiry

Base	Address	Telephone	Fax
Headquarter	84 Samyuksa-ro 548 Street, Dongduchon city, Kyungki do, Korea. ZIP 11341	+82-70-4354-3951	+82-70-7950-3951

Global website: www.1sbb.com jhlee@1sbb.com Sales Manager: JH LEE