



Test your product

Try your created product on your device right now

Scan the below QR Code from any of the Matter supported phone apps (details below) to setup the device.

Note: Use the QR Code in the device's respective folder if you are flashing multiple devices yourself.




Device Status

Check your connected device's info

Connected

ESP32-C6 (revision 0)

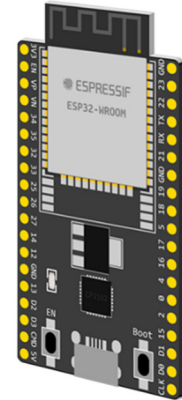

MAC 40:4C:CA:49:74:E0

FEATURES Wi-Fi 6, BT 5, IEEE802.15.4



Configuration Summary

Verify your device type and its configurations



DEVICE

Plug

Indicator: WS2812



MODULE

ESP32-C6-DevKitM-1



DRIVER

Input Button

1000 / GPIO / GPIO_CONFIG
- Active high: No
- IO pin GPIO: 9

Output Relay

1001 / GPIO / GPIO_CONFIG
- Active high: No
- IO pin GPIO: 4

LED

1002 / WS2812 / WS2812_CONFIG
- IO pin GPIO: 8
- Number of LEDs: 1