


## SERIES SG



## CHARACTERISTICS

- Miniature Slide switches
- Contact-wipe Action
- 1, 2 and 4 Poles
- Straight and Side actuated
- 2 mm Terminal spacing




## SPECIFICATIONS

**Rating:** 100 mA max @ 12VDC  
**Contact Resistance:** 20 mΩ max initial  
**Insulation Resistance:** 100 MΩ min @ 500V  
**Temperature:** Operating -10°C to +60°C  
**Operating Life:** 10,000 operations  
**Operating Force:** 300±150 gf  
**Soldering specifications:** 240°C for 3 Secs  
**Contacts:** Silver plated

## HOW TO ORDER

<b>S</b>	<b>G</b>					<b>V</b>
<b>MOUNTING STYLE*</b>		<b>ELECTRICAL FUNCTION</b>		<b>ACT. LENGTH**</b>		<b>ACT. SHAPE</b>
<b>A</b> No Bracket <b>B</b> U Bracket <b>C</b> U Bracket - Side Act.		<b>12</b> 1 Pole 2 Pos. <b>13</b> 1 Pole 3 Pos. <b>14</b> 1 Pole 4 Pos. <b>22</b> 2 Pole 2 Pos. <b>23</b> 2 Pole 3 Pos. <b>24</b> 2 pole 4 Pos. <b>42</b> 4 pole 2 Pos.		<b>02</b> 2 mm <b>04</b> 4 mm		<b>V</b> V Shape
(*) A number of other models are available please enquire (**) Different actuator length and styles available		<b>CHANGE-OVER</b>				
		<b>SP</b> shorting <b>NP</b> non shorting				


## MOUNTING STYLE

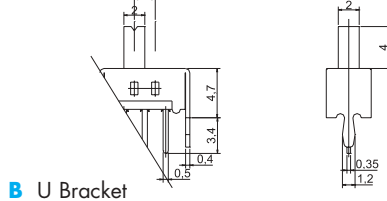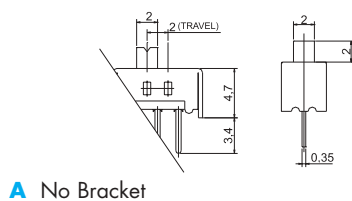


## DIMENSIONS

1 Pole 2 Pos.


**SGA-12xV**

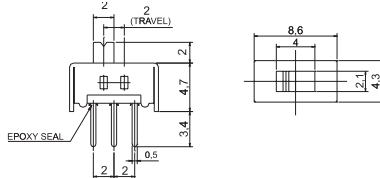

**SGB-12xV**




**SGC-12xV**




1 Pole 3 Pos.


**SGA-13xV**

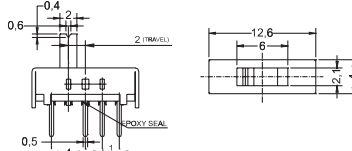

**SGB-13xV**

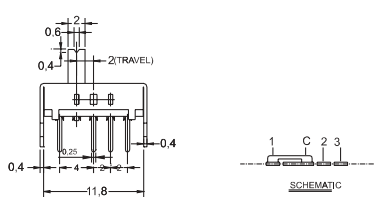


**SGC-13xV**




1 Pole 4 Pos.


**SGA-14xV**

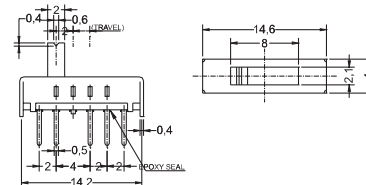

**SGB-14xV**

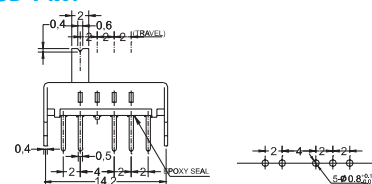

**SGC-14xV**



## 2 Pole 2 Pos.

**SGA-22xV****SGA-23xV****SGA-24xV****SGA-42xV**