

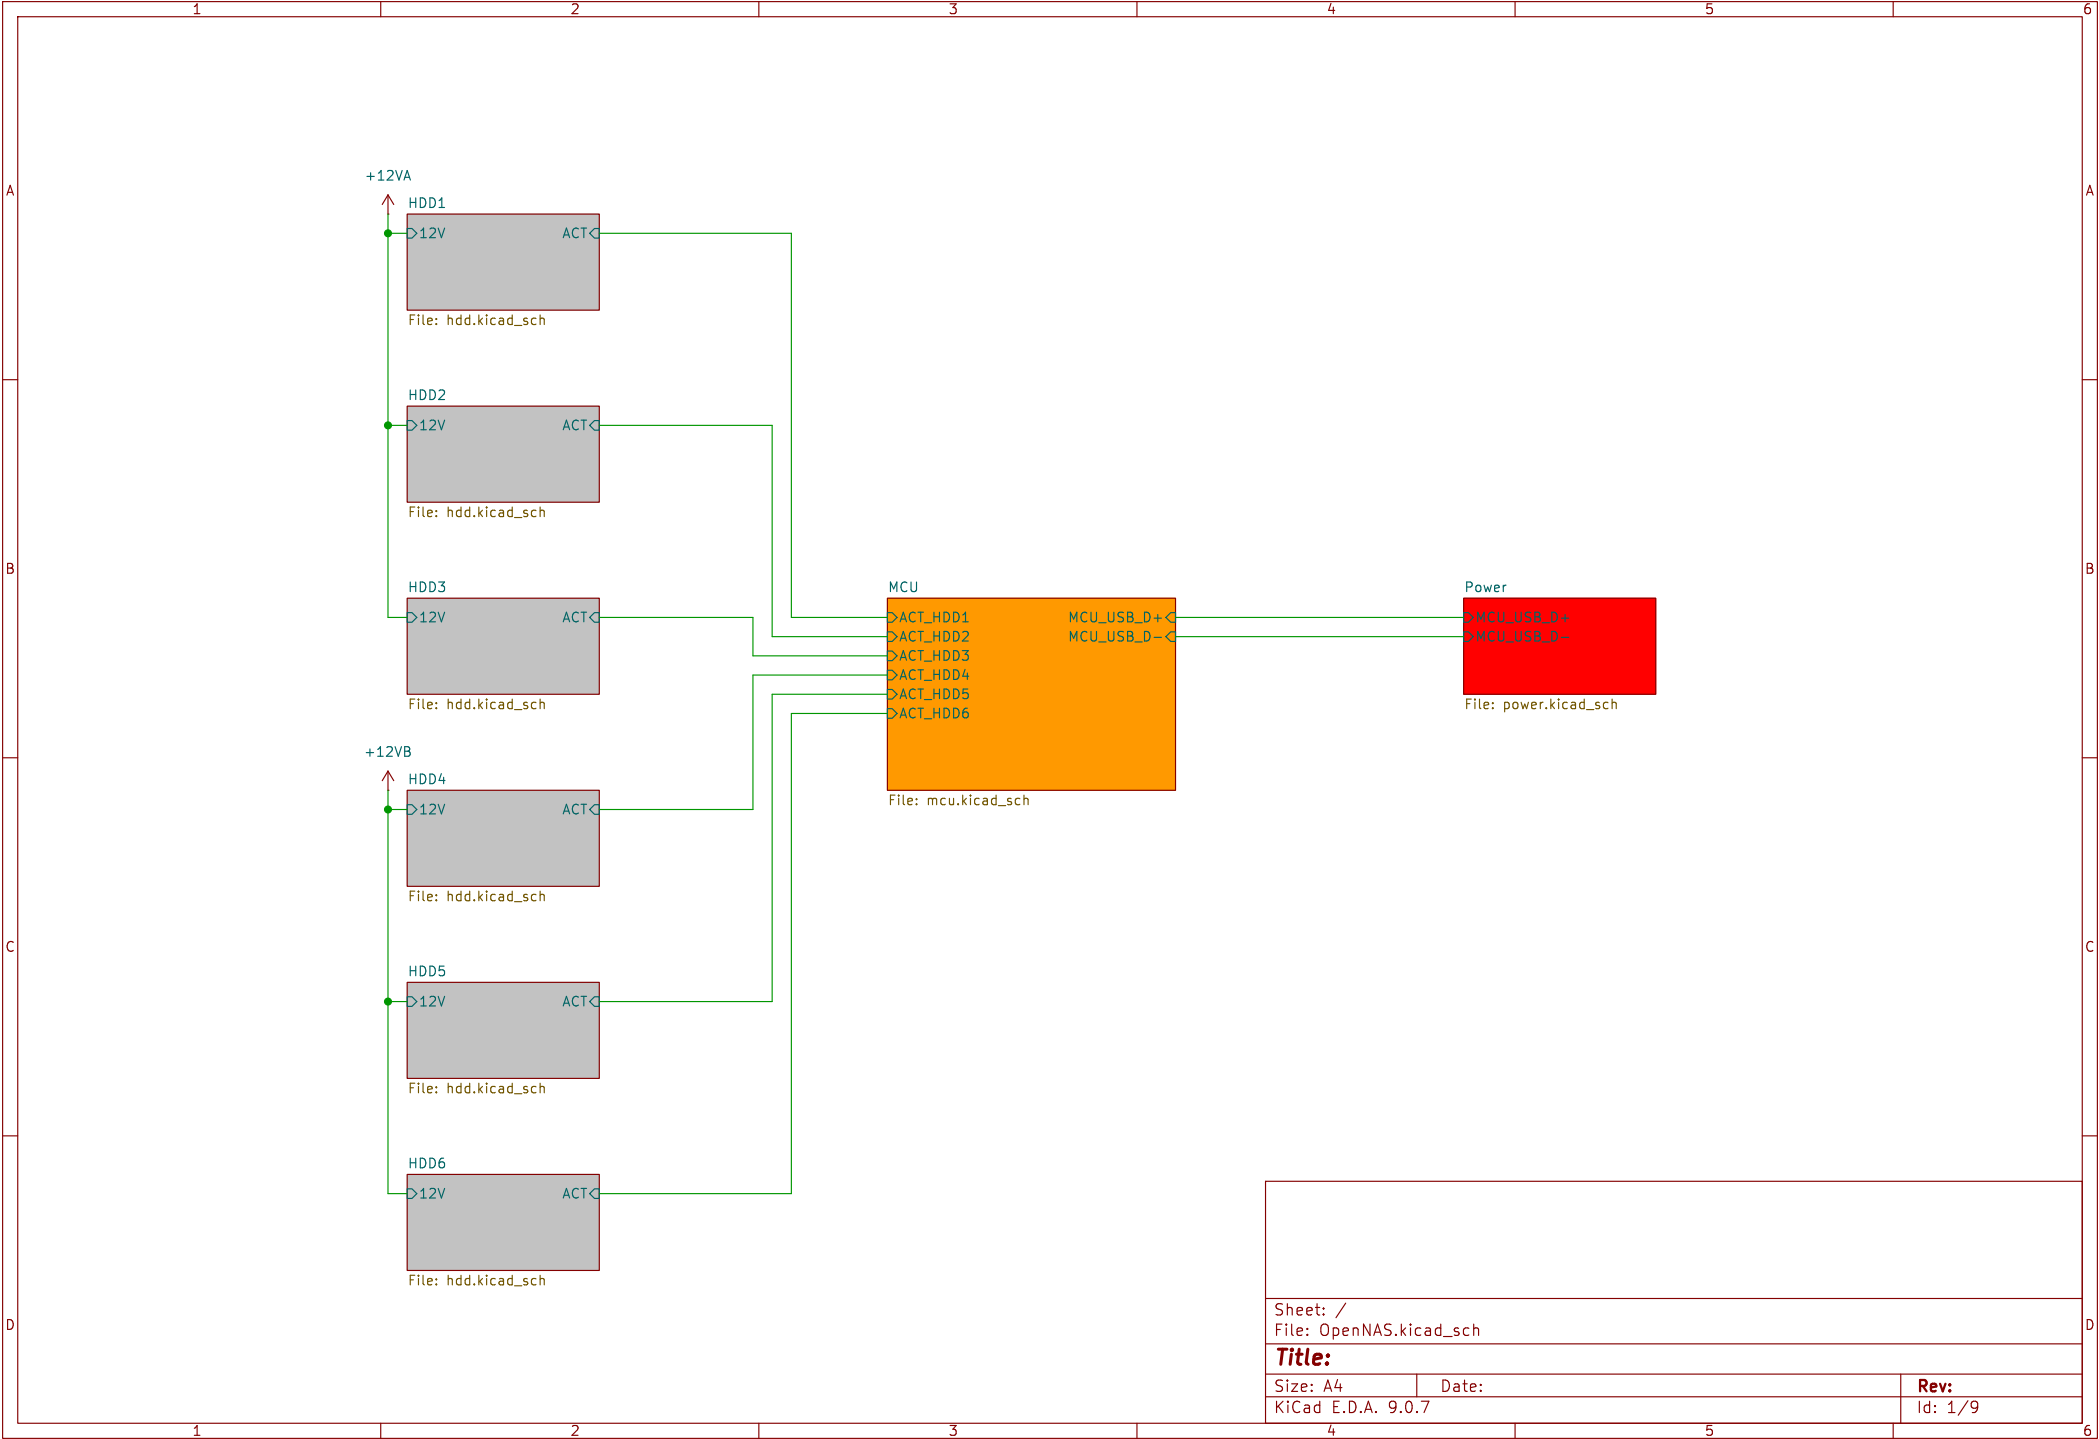
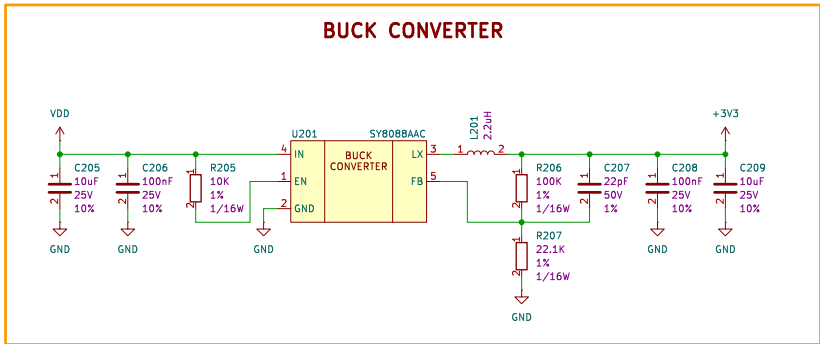
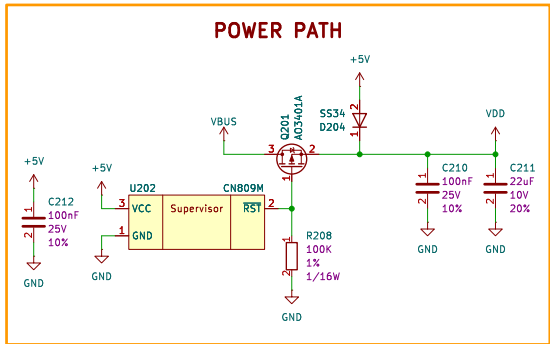


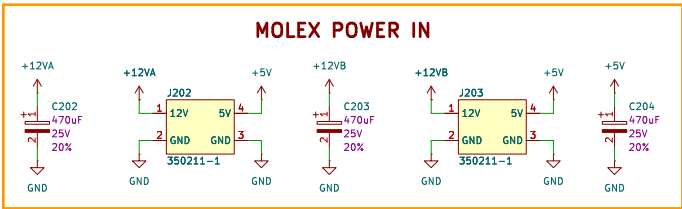

Sheet: /		
File: OpenNAS.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 1/9

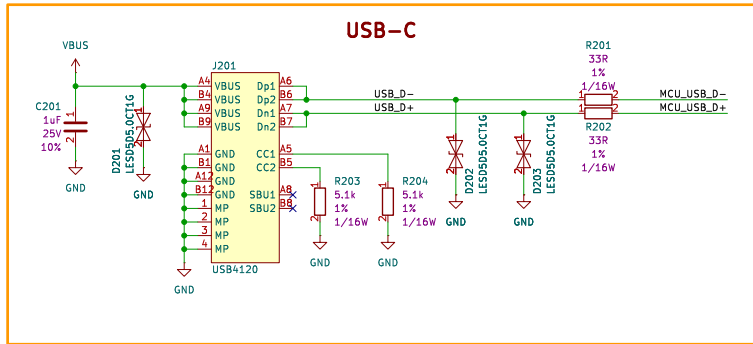


MCU_USB_D-
MCU_USB_D+

Sheet: /Power/
File: power.kicad_sch


Title:

Size: A3 Date: 2026-01-29
KiCad E.D.A. 9.0.7

Rev:
Id: 2/9

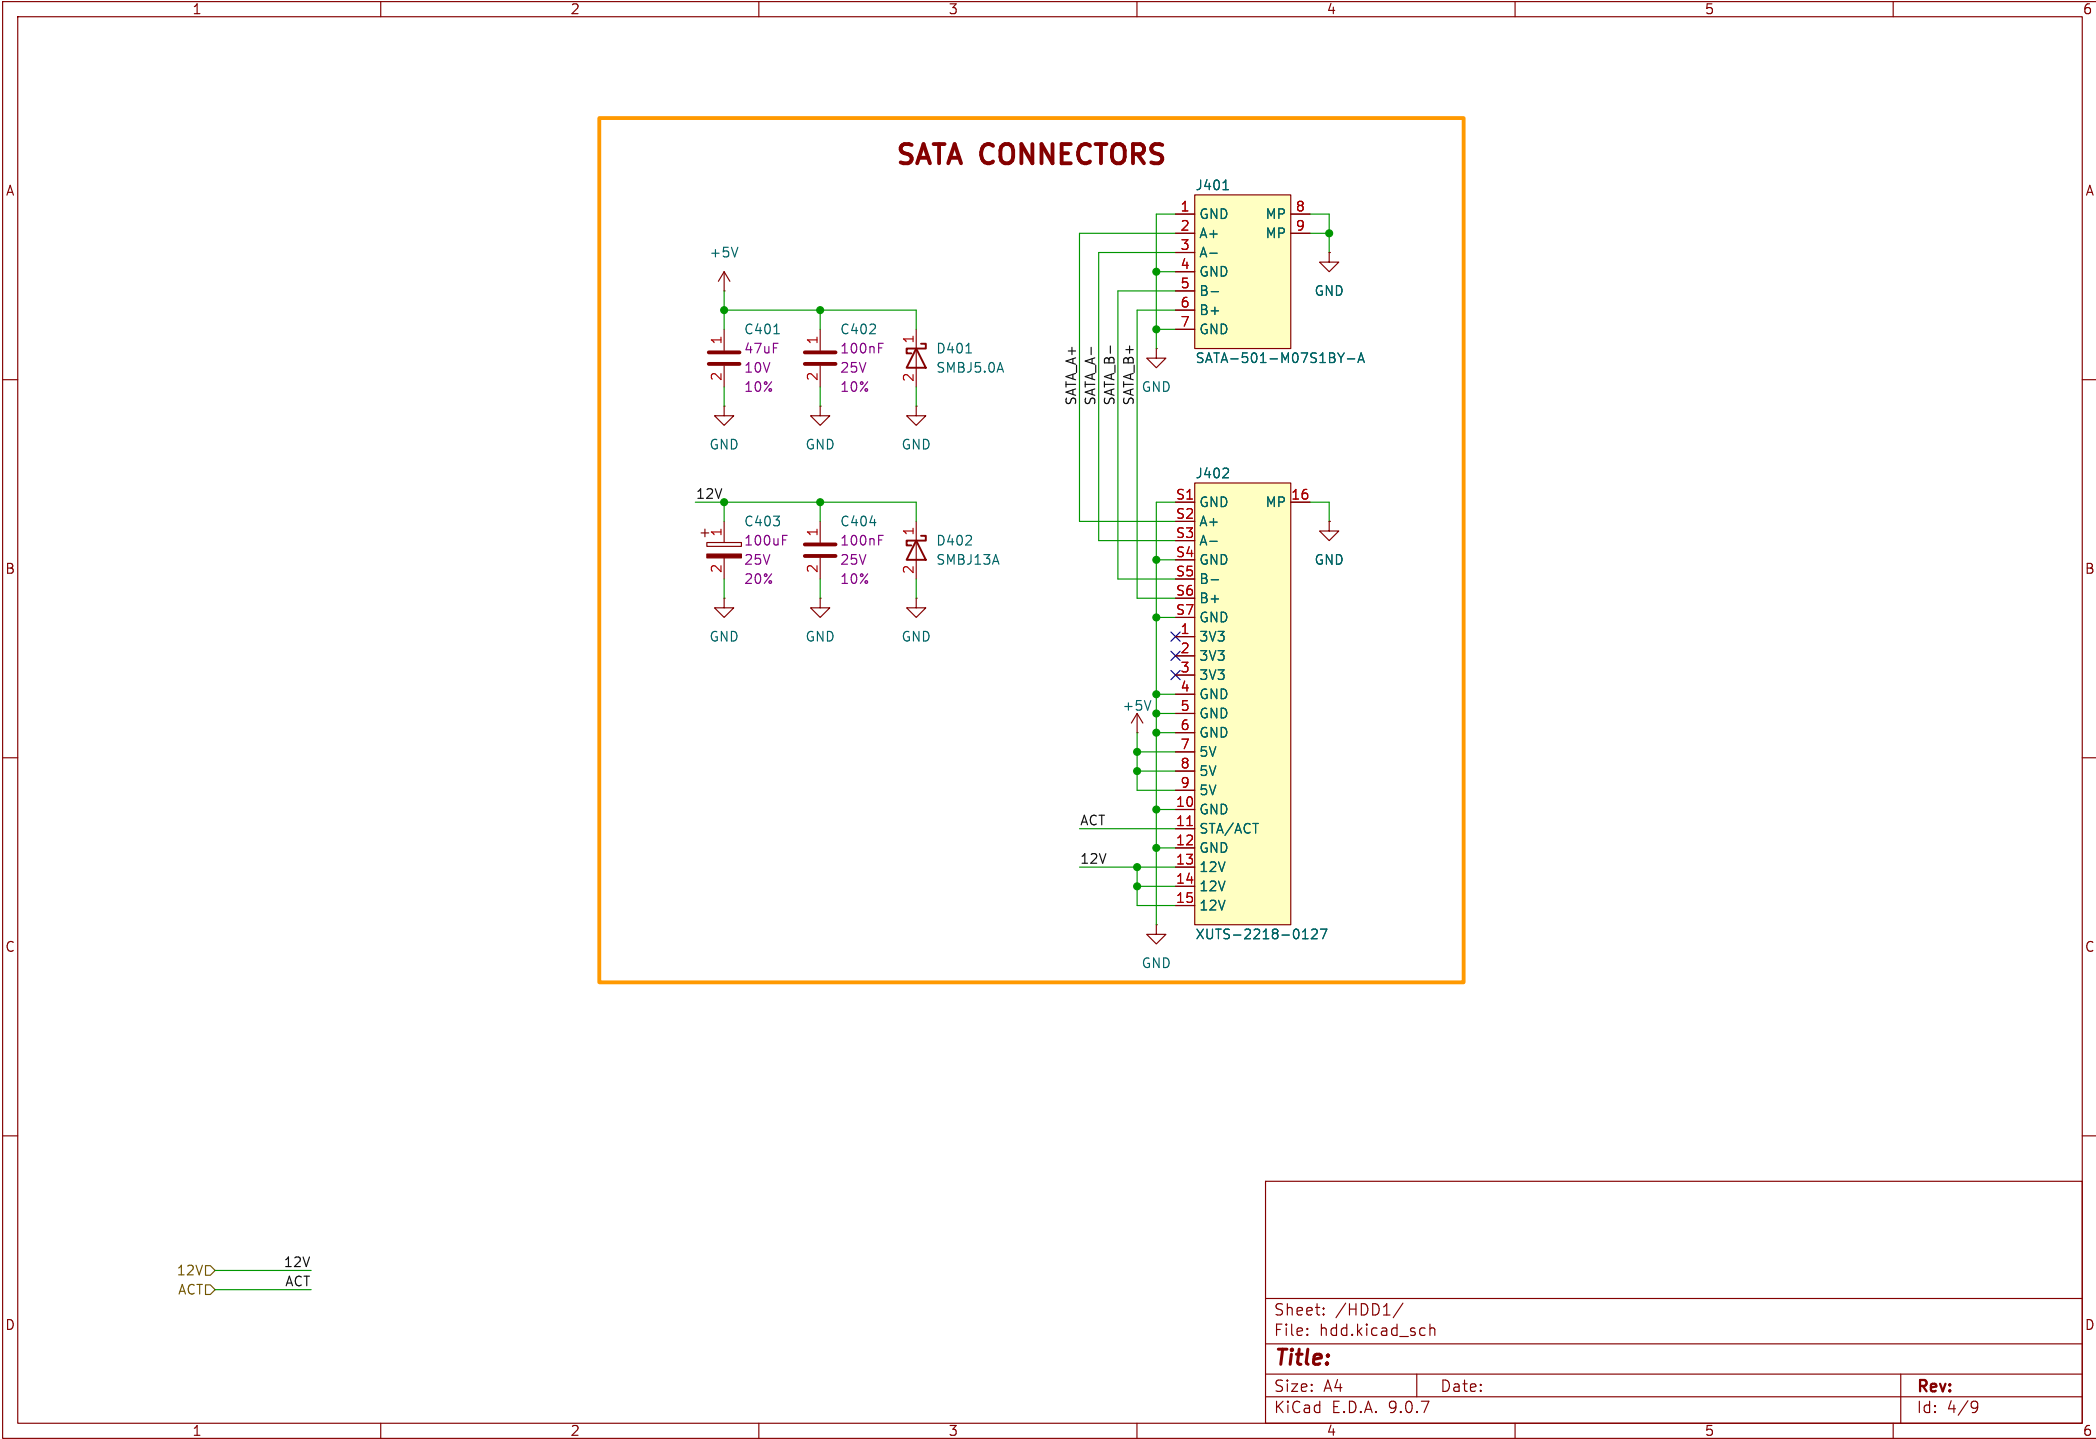

SATA CONNECTORS

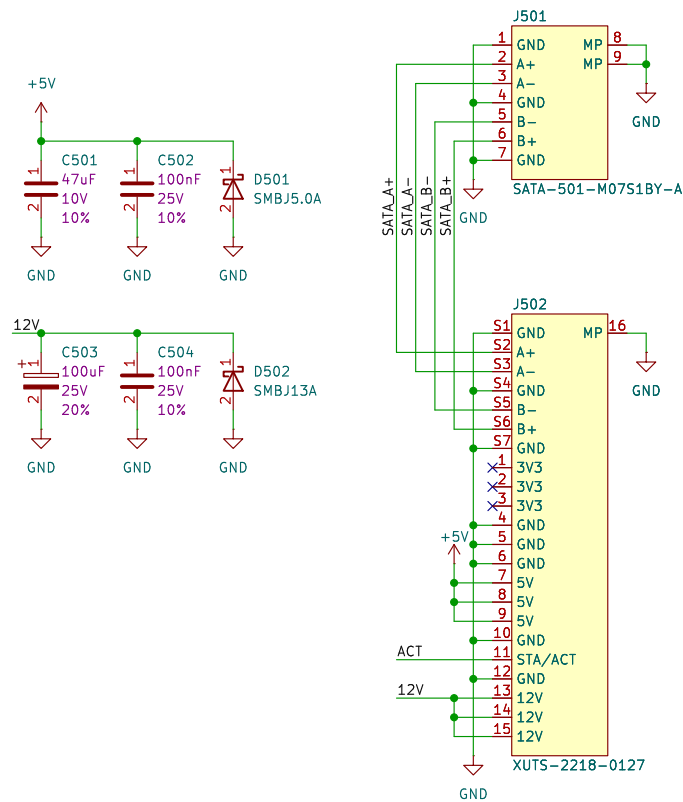

12VD 12V
ACTD ACT

Sheet: /HDD2/
File: hdd.kicad_sch

Title:

Size: A4


Date:

KiCad E.D.A. 9.0.7

Rev:


Id: 5/9

SATA CONNECTORS

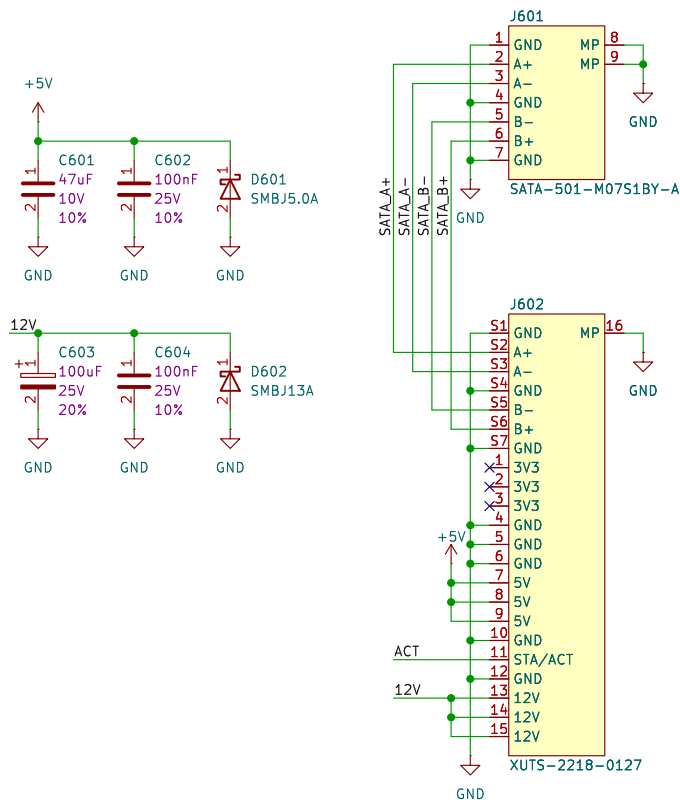

12VD 12V
ACTD ACT

Sheet: /HDD3/ File: hdd.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.7	Id: 6/9	

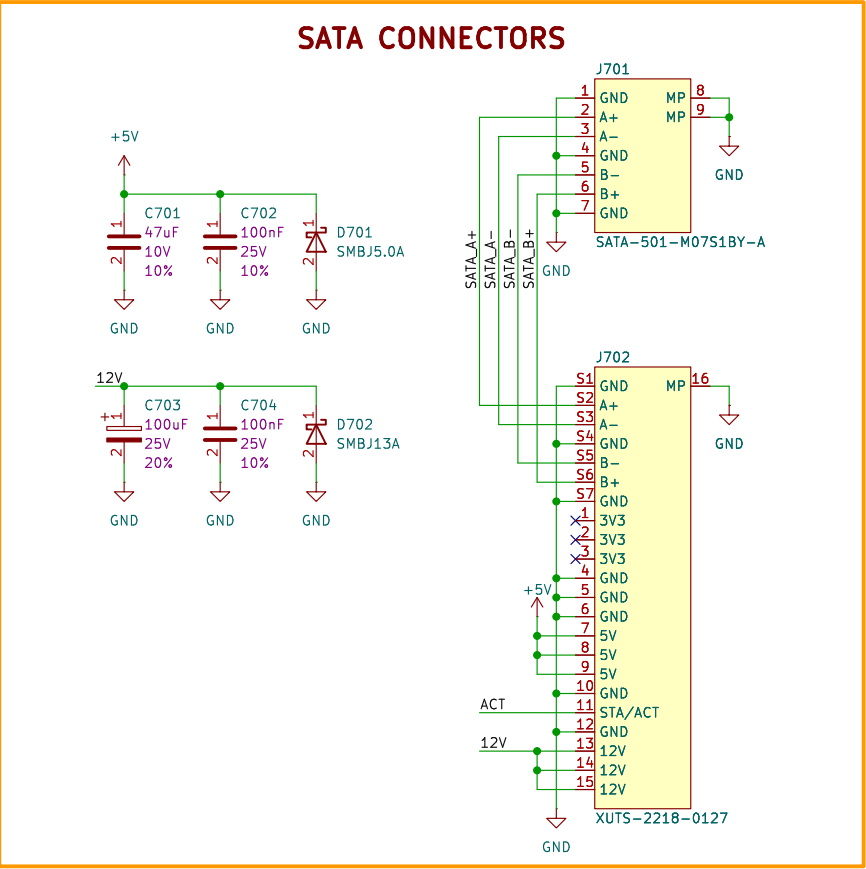

12VD 12V
ACTD ACT

Sheet: /HDD4/
File: hdd.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 7/9

SATA CONNECTORS


The diagram illustrates the internal wiring and component values for two SATA connectors, J801 and J802.

J801 (SATA-501-M07S1BY-A): This connector has 9 pins. Pins 1, 2, 3, 4, 5, 6, and 7 are connected to the data lines (A+, A-, B-, B+). Pins 8 and 9 are connected to the power lines (MP). The component values are: C801 (47uF, 10V, 10%), C802 (100nF, 25V, 10%), and D801 (SMBJ5.0A).

J802 (XUTS-2218-0127): This connector has 16 pins. Pins 1, 2, 3, 4, 5, 6, and 7 are connected to the data lines (A+, A-, B-, B+). Pins 8, 9, 10, and 11 are connected to the power lines (5V). Pins 12, 13, 14, and 15 are connected to the power lines (12V). Pins 16 and 17 are connected to the power lines (MP). The component values are: C803 (100uF, 25V, 20%), C804 (100nF, 25V, 10%), and D802 (SMBJ13A).

Sheet: /HDD5/		
File: hdd.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 8/9

SATA CONNECTORS

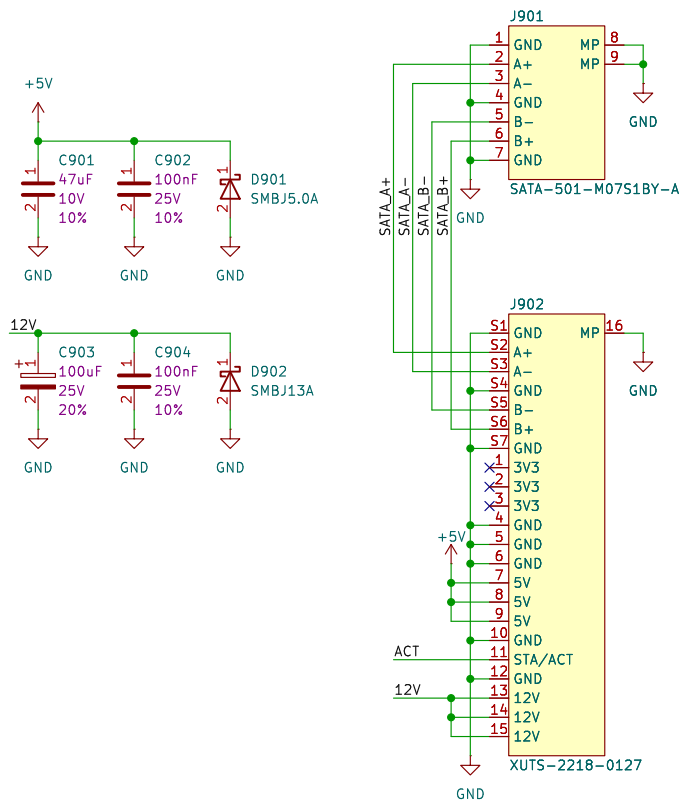

12VD 12V
ACTD ACT

Sheet: /HDD6/
File: hdd.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 9/9