

Parallel and Distributed Simulation of Large-Scale Distributed Applications

1. MOTIVATION AND PROBLEM STATEMENT

Simulation is the third pillar of science, allowing to study complicated phenomena through complex models. When the size or complexity of the studied models becomes too large, it is classical to leverage more resources through Parallel Discrete-Event Simulation (PDES).

Still, the parallel simulation of very fine grained applications deployed on large-scale distributed systems (LSDS) remains challenging. As a matter of fact, most simulators of Peer-to-Peer systems are sequential, despite the vast literature on PDES over the last three decades.

dPeerSim is one of the very few existing PDES for P2P systems, but it presents deceiving performance: it can achieve a decent speedup when increasing the amount of logical processes (LP): from 4h with 2 LPs down to 1h with 16 LPs. But it remains vastly inefficient when compared to sequential version of PeerSim, that performs the same experiment in 50 seconds only. This calls for a new parallel schema specifically tailored to this category of Discrete Event Simulators.

Discrete Event Simulation of Distributed Applications classically alternates between simulation phases where the models compute the next event date, and phases where the application workload is executed. We proposed

in [?] to not split the simulation model across several computing nodes, but instead to keep the model sequential and execute the application workload in parallel when possible. We hypothesized that this would help reducing the synchronization costs. We evaluate our contribution with very fine grained workloads such as P2P protocols. These workloads are the most difficult to execute efficiently in parallel because execution times are very short, making it very difficult to amortize the synchronization times.

We implemented this parallel schema within the SimGrid framework, and showed that the extra complexity does not endanger the performance since the sequential version of SimGrid still outperforms several competing solutions when

our addition are present but disabled at run time.

To the best of our knowledge, it is the first time that a parallel simulation of P2P system proves to be faster than the best known sequential execution. Yet, the parallel simulation only outperforms sequential one when the amount of processes becomes large enough. This is because of the pigeonhole principle: when the amount of processes increases, the average amount of processes that are ready to run at each simulated timestamp (and can thus run in parallel) increases. When simulating the Chord protocol, it takes 500,000 processes or more to amortize the synchronization costs, while the classical studies of the literature usually involve less processes.

The current work aims at further improving the performance of our PDES, using several P2P protocols as a workload. We investigate the possible inefficiency and propose generic solutions that could be included in other similar simulators of large-scale distributed systems, be them P2P simulators of cloud, HPC or sensor networks ones.

This paper is organized as follows: Section 2 recaps the SimGrid architecture and quickly presents the parallel execution schema detailed in [?]. Section 3 analyzes the theoretical performance bound, and discusses the previous work at the light of the Amdahl law. Section 4 explores several trade-offs for the efficiency of the parallel sections. Section 5 proposes an algorithm to automatically tune the level of parallelism that is adapted to the simulated application. Section 6 concludes this paper and discusses some future work.

2. CONTEXT

In the previous work [?] we proposed to parallelize the execution of the user code while keeping the simulation engine sequential. This is enabled by applying classical concepts of OS design to this new context: every interaction between the user processes (from now on, user processes and processes mean the same thing) and the simulated environment passes through a specific layer that acts as an OS kernel.

A novel way to virtualize user processes (*raw contexts*) was crafted to improve efficiency and avoid unnecessary system calls, but other ways to do this can be found for the sake of portability, such as full featured threads, or POSIX ucontexts. A new data structure to store the shared state of the system and synchronize the process execution was implemented as well.

A new specific layer that acts as the OS kernel was implemented in SimGrid to emulate system calls, called *requests*, and each time a user process wants to interact with other

process, or the kernel itself, it raises a *request*. After that, the engine takes control of the program and answer the *requests* of each process. This way the user processes can be parallelized in a safe manner.

Experimental results showed that the new design does not hinder the tool scalability. In fact, the sequential version of SimGrid remains orders of magnitude more scalable than state of the art simulators. The difficulty to get a parallel version of a P2P simulator faster than its sequential counterpart was also revealed in [?], being the first time that a parallel simulation of Chord runs faster than the best known sequential implementation.

An interesting result showed in the previous work is that the speedups only increased up to a certain point when increasing the amount of working threads. We also have proved that for small instances, parallelism actually hinders the performance, and that the relative gain of parallelism seems even strictly increasing with the system size.

Now we are closer to the optimal Amdahl's law threshold, that means that we have reach a limit on the parallelizable portions of the code in our proposed model. The remaining optimizations seek for a final speedup, trying to get a better parallel threshold dynamically depending on the simulation, and better performance of the threads taking in count their distribution on the CPU cores and the different synchronization modes (futex, POSIX primitives or busy waiters).

3. PERFORMANCE ANALYSIS

3.1 Current speedup achieved

We want to find the maximum speedup achieved with our current parallel model. For that, a benchmark test is run to get the timings of typical sequential and parallel executions, so we can get the real speedup achieved with our system using the Amdahl's law.

But first we want to prove that our benchmarks are not intrusive, that is, our measures do not really affect the overall performance of the system. For that, the experiments are run with and without benchmarking, using the Precise mode, and then a comparison of both is made to find if there is a significative breach in the timings of both experiments.

Using the Chord simulation, the experiment showed us that the maximum difference in the execution time of both versions is lesser than 10% in most of the cases, and is even lower with sizes bigger that 100000 nodes, which allow us to conclude that the benchmarking is, indeed, not intrusive.

The experiment to calculate speedups involves the Chord simulation as well, using the Precise model of our engine, and running it with 2,4,8,16 and 24 threads. The actual speedup obtained can be seen in the Figure 1. It is clear from that graph that the real speedup with our parallel model is obtained when the size of the problem is bigger than 100000 nodes. This confirms what we have proved in [?].

3.2 Parallelizable portions of the problem

This experiment is based on a typical Chord simulation, and the data wanted is the following: ID of each Scheduling Round, time taken by each Scheduling Round and number of process executed in each scheduling round.

What we want to prove is that the limit on the speed up reached is due to the fact that we are very closer to the line that define what is parallelizable in our model and what is

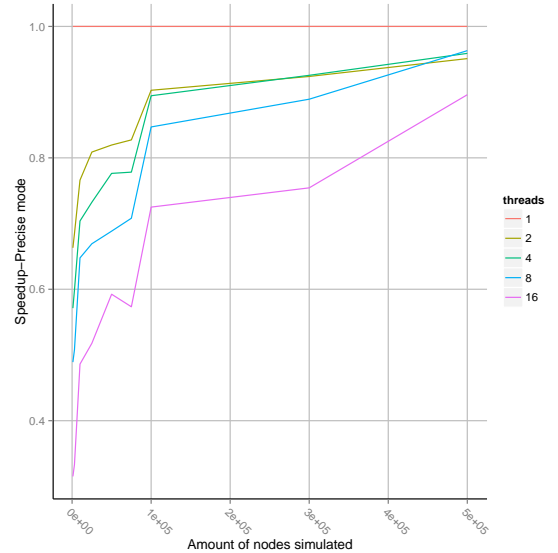


Figure 1: Baseline performance of SimGrid 3.11. Speedups achieved using multithreaded executions against the sequential ones.

executed sequentially. As it can be seen in the Figure 2 , the amount of processes computed by each scheduling round is only one most of the times (between 50-60%), so the parallel execution is not possible in that instances. The remaining processes are executed in parallel due to the parallel execution threshold already setted up in SimGrid (which can be modified).

Besides that, the Figure 3 shows that when the amount of processes is bigger, then the sequential execution time is bigger. That means that parallelizing that remaining percentage of SR's can help to increase the performance.

4. OPTIMIZATIONS

4.1 Binding threads to physical cores

Regarding the multicore architectures (like almost every modern CPU), parallelization through threads is well proved to be a good optimization, as we said in the previous section 3. But there are still some improvements that can be done.

Thread execution depends heavily on the operative system scheduler: when one thread is *idle*, the scheduler may decide to switch it for another thread ready to work, so it can maximize the occupancy of the cpu cores, and probably, run a program in a faster way. Or it may just want to switch threads because their execution time quote is over.

And when the first thread is ready to work again, the cpu core where it was before might be occupied, forcing the system to run the thread in another core. Of course this depend on which scheduler implementation we are using.

Regardless of the situation, migration of threads between cores entails an increase of cache misses, and the amount of CPU migrations in a big size simulation can be detrimental for the performance.

In order to avoid these CPU migrations produced by a constant context switching of threads, Glib offers a way to bind each thread to a physical core of the CPU. Note that

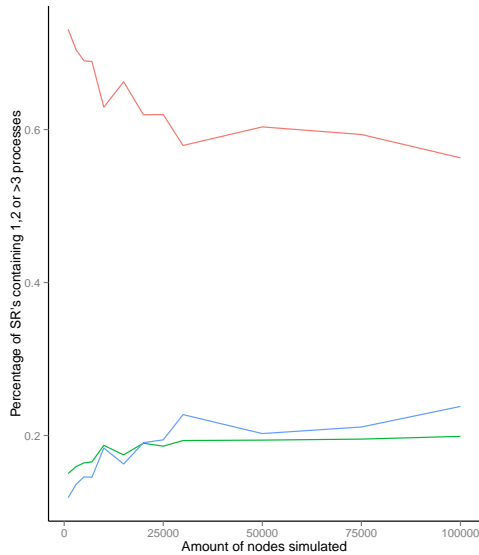


Figure 2: Proportions of SR's having only one process to compute, SR's having 2 and SR's having 3 or more; according to the size of nodes simulated.

this is only available in Linux platforms.

A Chord simulation was run in a parapluie node, with 24 cores, binding the threads to physical cores. The CPU migration was drastically reduced (almost 97% less migrations) in all the cases. The speedup obtained with few threads (2, 4 and 8) was not big enough: $\times 1.63$ in the best case, and $\times 1.23$ in average. But when the simulation is run with a bigger amount of threads (16 or 24), the impact of having less CPU migrations is notable, being obtained speedups between $\times 2.44$ and almost $\times 15$ (depending on the amount of threads and the size of the simulation). This proves that physical binding of threads to CPU cores can be useful when a big amount of threads is needed.

4.2 Parmap between N cores

Several optimizations regarding the distribution of work between threads were proposed: the first option is the default one, where maestro works with its threads and the processes are distributed equitably between each thread; the second one is to send maestro to sleep and let the worker threads do all the computing; the last one involves the creation of one extra thread and make all this N threads work while maestro sleeps.

The experiments were made using up to 75000 nodes in a Chord simulation with Precise mode, but no performance gain was achieved. In fact, the creation of one extra thread proved to be slightly more slower than the original version of parmap, while sending maestro to sleep and make its N-1 threads do the computation did not show any improvement or loss in performance.

4.3 Busy Waiting versus Futexes

SimGrid provides several types of synchronization between threads: Fast Userspace Mutex (futex), the classical POSIX synchronization primitives and busy waiters. While each of them can be chosen when running the simulation, futexes are the default option, since they have the advan-


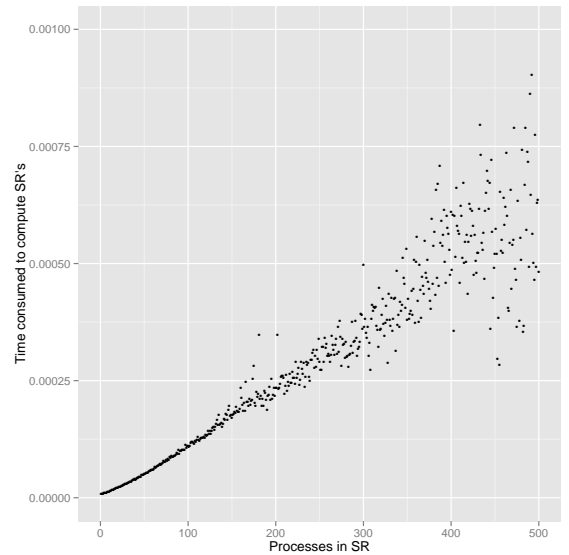


Figure 3: Times of SR's sequential executions depending on the amount of processes of each SR.

tage to implement a fast synchronization mode within the parmap abstraction, in user space only. But even when they are more efficient than classical mutexes, which run in kernel space, they may present performance drawbacks. In this section we compare the busy waiters vs. futexes synchronization types, using the chord simulation in both Precise mode, and we found that using busy waiters instead of futexes can result in a speedup between 1.08 and 1.53 using few threads (up to 8), and from 1.15 to 3 when the amount of threads is big enough (16 or 24).

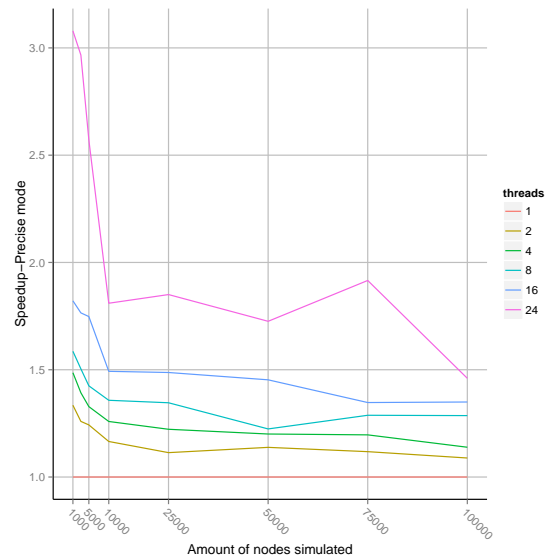


4.4 Performance Regression Testing

5. OPTIMAL THRESHOLD FOR PARALLEL EXECUTION

5.1 Getting a real threshold over simulations

The threshold wanted is how many processes are the right amount to be executed in parallel when it is necessary, and when is it better to execute them in a sequential way. Initially, what we want is to find an optimal threshold for the beginning of any simulation. For that purpose, we have done a benchmark of the scheduling rounds timings in parallel and sequential executions, and have found the best average option for a simulation.

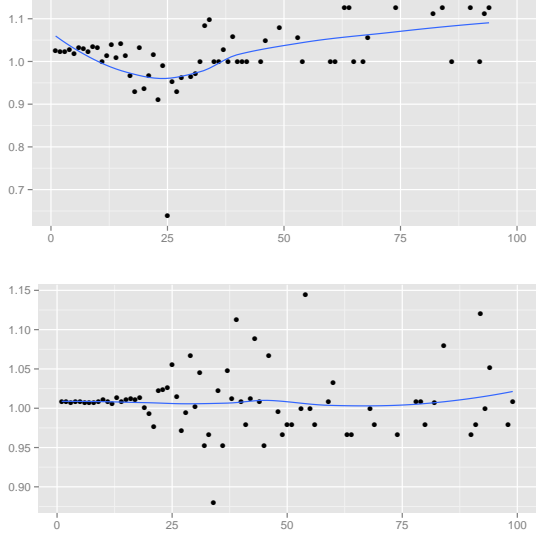

As it can be seen in the Figure ??, the optimal threshold starts at 28 user processes for the Precise mode.

5.2 Adaptive algorithm to calculate threshold

Finding an optimal threshold and keep it during all the simulation might not always be the best option: some simulations can take more or less time in the execution of user processes. If a simulation has very efficient processes, or processes that don't work too much, then the threshold could be inappropriate, leading to parallelize scheduling rounds that would run more efficiently in a sequential way. That's why an algorithm for a dynamic threshold calculation is proposed.

The main idea behind this heuristic is to calculate the optimal number of processes that can be run in parallel during the execution of the simulation.

For that purpose, the times of five scheduling round are measured. A performance ratio for both of the possible parallel and sequential executions is calculated, simply by dividing the time taken by the amount of processes computed. If the sequential ratio turns to be bigger than the parallel one, then the threshold is decreased, and increased otherwise.

This results in a relative improvement in performance. As it can be seen on Figure ??, the speedup is important in the 16 and 24 threads cases, reaching levels between 11 and 47 with small sizes (1000, 5000, and 10000 nodes), while with fewer amounts of threads (2,4,8) the speedup is not big, between 1.28 and 4.62. This can be explained by the fact that the algorithm choose more efficiently when to launch a scheduling round in parallel, and while having a lot of threads increases the costs of synchronization, an intelligent choice of when to launch them will reduce that cost.

Algorithm 1 Adaptive Threshold

```

1: procedure RUNSCHEDULINGROUND
2:   if five SR's have passed then
3:      $num\_sr\_sequential \leftarrow 1$ 
4:      $num\_sr\_parallel \leftarrow 1$ 
5:     if  $sequential\_time/num\_process\_sequential >$ 
        $parallel\_time/num\_process\_parallel$  then
6:       decrease threshold
7:     else
8:       increase threshold
9:      $sequential\_time, parallel\_time \leftarrow 0$ 
10:     $num\_seq\_process, num\_par\_process \leftarrow 0$ 
11:    if  $processes\_to\_run \geq current\_parallel\_threshold$ 
        then
12:      start_timer(timer)
13:      Execute SR in parallel
14:      stop_timer(timer)
15:       $num\_sr\_parallel++$ 
16:    else
17:      start_timer(timer)
18:      Execute SR sequentially
19:      stop_timer(timer)
20:       $num\_sr\_sequential++$ 

```

6. CONCLUSION

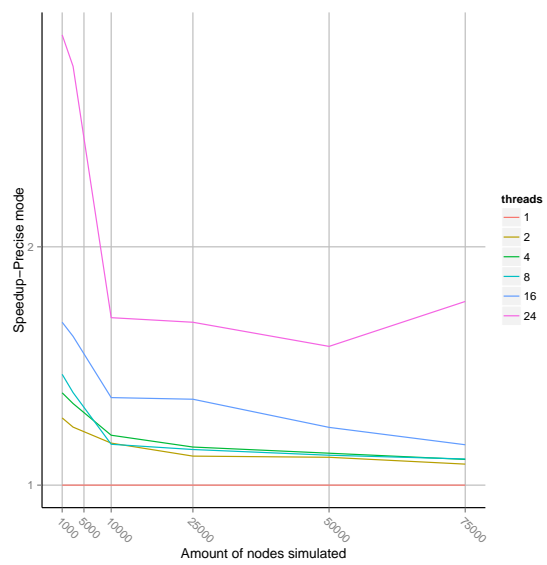


Figure 4: Speedup achieved with Adaptive Algorithm. Chord simulation, Precise mode.

APPENDIX

A. DATA PROVENANCE

This section explains and show how to run the experiments and how the data is saved and then processed. Note: that all experiments are run using the Chord simulation that can be found in examples/msg/chord folder of your SimGrid install. Unless stated, all the experiments are run using the futex synchronization method and raw contexts under a Linux environment; in a node from 'parapluie' cluster of Grid5000. The analysis of data can be done within this paper itself, executing the corresponding R codes. Note that it is even possible to execute them remotely if TRAMP is used to open this file (this is useful if you want the data to be processed in one powerful machine, such as a cluster).

A.1 Setting up the machine

Install required packages to compile/run SimGrid experiments. If you are in a cluster (such as Grid5000) you can run this file remotely in a deployed node and still be able to setup your environment. Run this two code chunks sequentially in order to create folders, install packages and create required deployment/platform files.

```
# Save current directory where the report is
BASE_DIR=$PWD
```

```
sudo apt-get update
sudo apt-get install cmake make gcc git libboost-dev libgct++ libpcrc3-dev linux-tools gdb liblua5.1-0-dev \
    libdwf-dev libunwind7-dev valgrind libsigc++
mkdir -p Simpar/{SimGrid,deployment,platforms,logs,fig}
cd Simpar/SimGrid/
# Clone latest SimGrid version. You may have to configure proxy settings if you are in a G5K node in order to clone
#git clone https://gforge.inria.fr/git/simgrid/simgrid.git .
cmake -Denable_compile_optimizations=ON -Denable_supernovae=OFF -Denable_compile_warnings=OFF -Denable_debug=OFF -D
sudo make install
cd ../../
```

```
# Add/quit sizes as you wish
list_nb_nodes = [1000,5000,10000,15000]
nb_bits = 32
end_date = 10000
```

```
# This function generates a specific platform file for the Chord example.
```

```
import random
def platform(nb_nodes, nb_bits, end_date):
    max_id = 2 ** nb_bits - 1
    all_ids = [42]
    res = ["<?xml version='1.0'?>\n"
"<!DOCTYPE platform SYSTEM \"http://simgrid.gforge.inria.fr/simgrid.dtd\">\n"]
    res.append("<!-- nodes: %d, bits: %d, date: %d -->\n"%(nb_nodes, nb_bits, end_date))
    res.append("<platform version='3'>\n"
"  <process host='c-0.me' function='node'><argument value='42'><argument value='%d'></process>\n" % end_date)
    for i in range(1, nb_nodes):
        ok = False
        while not ok:
            my_id = random.randint(0, max_id)
            ok = not my_id in all_ids
        known_id = all_ids[random.randint(0, len(all_ids) - 1)]
        start_date = i * 10
        res.append("  <process host='c-%d.me' function='node'><argument value='%d' /><argument value='%d' /><ar"
all_ids.append(my_id)
    res.append("</platform>\n")
    res = "".join(res)
    f = open("./Simpar/platforms/chord%d.xml"%nb_nodes, "w")
    f.write(res)
    f.close()
    return
```

```
# This function generates a specific deployment file for the Chord example.
```

```
# It assumes that the platform will be a cluster.
```

```
def deploy(nb_nodes):
    res = ""<?xml version='1.0'?>
```

```

<!DOCTYPE platform SYSTEM "http://simgrid.gforge.inria.fr/simgrid.dtd">
<platform version="3">
<AS id="ASO" routing="Full">
  <cluster id="my_cluster_1" prefix="c-" suffix=".me"
radical="0-%d" power="1000000000" bw="125000000" lat="5E-5"/>
</AS>
</platform>""%(nb_nodes-1)
  f = open("./Simpar/deployment/One_cluster_nobb_%d_hosts.xml"%nb_nodes, "w")
  f.write(res)
  f.close()
  return

for size in list_nb_nodes:
  platform(size, nb_bits, end_date)
  deploy(size)

```

A.2 Scripts to run benchmarks

This is a general script that can be used to run all the benchmarks after the proper modifications were done.

```

# This script is to benchmark the Chord simulation that can be found
# in examples/msg/chord folder.
# The benchmark can be done with both Constant and Precise mode, using
# different sizes and number of threads (which can be modified).
# This script also generate a table with all the times gathered, that can ease
# the plotting, compatible with gnuplot/R.
# By now, this script copy all data (logs generated an final table) to a
# personal frontend-node in Grid5000. This should be modified in the near
# future.

#####
# MODIFIABLE PARAMETERS: SGPATH, SGHASH, sizes, threads, log_folder, file_table
# host_info, timefmt, cp_cmd, dest.

# Path to installation folder needed to recompile chord
# If it is not set, assume that the path is '/usr/local'
if [ -z "$SG_PATH" ]
then
  SGPATH='/usr/local'
fi

# Save the revision of SimGrid used for the experiment
SGHASH=$(git rev-parse --short HEAD)

# List of sizes to test. Modify this to add different sizes.
if [ -z "$sizes" ]
then
  sizes=(1000 3000)
fi

# Number of threads to test.
if [ -z "$threads" ]
then
  threads=(1 2 4 8 16 24)
fi

# Path where to store logs, and filenames of times table, host info
if [ -z "$log_folder" ]
then
  log_folder=$BASE_DIR"/Simpar/logs"
else
  log_folder=$BASE_DIR"/Simpar/logs/"$log_folder
fi

if [ ! -d "$log_folder" ]

```

```

then
    echo "Creating $log_folder to store logs."
    mkdir -p $log_folder
fi

# Copy all the generated deployment/platform files into chord folder
cp $BASE_DIR/Simpar/platforms/* .
cp $BASE_DIR/Simpar/deployment/* .

file_table="timings_$SGHASH.csv"
host_info="host_info.org"
rm -rf $host_info

# The las %U is just to ease the parsing for table
timefmt="clock:%e user:%U sys:%S telapsed:%e swapped:%W exitval:%x max:%Mk avg:%Kk %U"

# Copy command. This way one can use cp, scp and a local folder or a folder in
# a cluster.
sep=', '
cp_cmd='cp'
dest=$log_folder"/." # change for <user>@<node>.grid5000.fr:~/log_folder if necessary
#####

#####
echo "Recompile the binary against $SGPATH"
export LD_LIBRARY_PATH="$SGPATH/lib"
rm -rf chord
gcc chord.c -L$SGPATH/lib -I$SGPATH/include -I$SGPATH/src/include -lsimgrid -o chord

if [ ! -e "chord" ]; then
    echo "chord does not exist"
    exit;
fi
#####

#####
# PRINT HOST INFORMATION IN DIFFERENT FILE
set +e
echo "#+TITLE: Chord experiment on $(eval hostname)" >> $host_info
echo "#+DATE: $(eval date)" >> $host_info
echo "#+AUTHOR: $(eval whoami)" >> $host_info
echo " " >> $host_info

echo "* People logged when experiment started:" >> $host_info
who >> $host_info
echo "* Hostname" >> $host_info
hostname >> $host_info
echo "* System information" >> $host_info
uname -a >> $host_info
echo "* CPU info" >> $host_info
cat /proc/cpuinfo >> $host_info
echo "* CPU governor" >> $host_info
if [ -f /sys/devices/system/cpu/cpu0/cpufreq/scaling_governor ];
then
    cat /sys/devices/system/cpu/cpu0/cpufreq/scaling_governor >> $host_info
else
    echo "Unknown (information not available)" >> $host_info
fi
echo "* CPU frequency" >> $host_info
if [ -f /sys/devices/system/cpu/cpu0/cpufreq/scaling_cur_freq ];
then
    cat /sys/devices/system/cpu/cpu0/cpufreq/scaling_cur_freq >> $host_info
else

```



```

echo "Unknown (information not available)" >> $host_info
fi
echo "* Meminfo" >> $host_info
cat /proc/meminfo >> $host_info
echo "* Memory hierarchy" >> $host_info
lstopo --of console >> $host_info
echo "* Environment Variables" >> $host_info
printenv >> $host_info
echo "* Tools" >> $host_info
echo "*** Linux and gcc versions" >> $host_info
cat /proc/version >> $host_info
echo "*** Gcc info" >> $host_info
gcc -v 2>> $host_info
echo "*** Make tool" >> $host_info
make -v >> $host_info
echo "*** CMake" >> $host_info
cmake --version >> $host_info
echo "* SimGrid Version" >> $host_info
grep "SIMGRID_VERSION_STRING" ../../../../include/simgrid_config.h | sed 's/.*/(.*)'["^"]*$&/\1/' >> $host_info
echo "* SimGrid commit hash" >> $host_info
git rev-parse --short HEAD >> $host_info
$(cp_cmd $host_info $dest)
#####

#####
# ECHO TABLE HEADERS INTO FILE_TABLE
rm -rf $file_table
tabs_needed=""
for thread in "${threads[@]"; do
thread_line=$thread_line"\t"$thread
done
thread_line=$thread_line$thread_line
for size in $(seq 1 ${(#threads[@]}-1)); do
tabs_needed=$tabs_needed"\t"
done
echo "#SimGrid commit $SGHASH" >> $file_table
echo -e "#\t\tconstant${tabs_needed}precise" >> $file_table
echo -e "#size/thread$thread_line" >> $file_table
#####

#####
# START SIMULATION

test -e tmp || mkdir tmp
me=tmp/`hostname -s`

for size in "${sizes[@]"; do
line_table=$size
# CONSTANT MODE
for thread in "${threads[@]"; do
filename="chord_${size}_threads_${thread}_constant.log"
rm -rf $filename

if [ ! -f chord$size.xml ]; then
./generate.py -p -n $size -b 32 -e 10000
fi

if [ ! -f One_cluster_nobb_${size}_hosts.xml ]; then
./generate.py -d -n $size
fi

echo "$size nodes, constant model, $thread threads"

```

```

cmd="./chord One_cluster_nobb-"$size"_hosts.xml chord$size.xml --cfg=contexts/stack_size:16 --cfg=network/model:Con

/usr/bin/time -f "$timefmt" -o $me.timings $cmd $cmd 1>/tmp/stdout-xp 2>/tmp/stderr-xp

if grep "Command terminated by signal" $me.timings ; then
    echo "Error detected:"
    temp_time="errSig"
elif grep "Command exited with non-zero status" $me.timings ; then
    echo "Error detected:"
    temp_time="errNonZero"
else
    temp_time=$(cat $me.timings | awk '{print $(NF)}')
fi

# param
cat $host_info >> $filename
echo "* Experiment settings" >> $filename
echo "size:$size, constant network, $thread threads" >> $filename
echo "cmd:$cmd" >> $filename
#stderr
echo "* Stderr output" >> $filename
cat /tmp/stderr-xp >> $filename
# time
echo "* Timings" >> $filename
cat $me.timings >> $filename
line_table=$line_table$sep$temp_time
$(cp_cmd $filename $dest)
rm -rf $filename
rm -rf $me.timings
done

#PRECISE MODE
for thread in "${threads[@]}; do
echo "$size nodes, precise model, $thread threads"
filename="chord_${size}_threads_${thread}_precise.log"

cmd="./chord One_cluster_nobb-"$size"_hosts.xml chord$size.xml --cfg=contexts/stack_size:16 --cfg=maxmin/precision:

/usr/bin/time -f "$timefmt" -o $me.timings $cmd $cmd 1>/tmp/stdout-xp 2>/tmp/stderr-xp

if grep "Command terminated by signal" $me.timings ; then
    echo "Error detected:"
    temp_time="errSig"
elif grep "Command exited with non-zero status" $me.timings ; then
    echo "Error detected:"
    temp_time="errNonZero"
else
    temp_time=$(cat $me.timings | awk '{print $(NF)}')
fi
# param
cat $host_info >> $filename
echo "* Experiment settings" >> $filename
echo "size:$size, constant network, $thread threads" >> $filename
echo "cmd:$cmd" >> $filename
#stderr
echo "* Stderr output" >> $filename
cat /tmp/stderr-xp >> $filename
# time
echo "* Timings" >> $filename
cat $me.timings >> $filename
line_table=$line_table$sep$temp_time
$(cp_cmd $filename $dest)
rm -rf $filename

```

```

rm -rf $me.timings
done

echo -e $line_table >> $file_table

done

$(($cp_cmd $file_table $dest)
rm -rf $file_table
rm -rf tmp

# This script is to benchmark the Chord simulation that can be found
# in examples/msg/chord folder.
# The benchmark is done with both Constant and Precise mode, using
# different sizes and number of threads (which can be modified).
# This script also generate a table with all the times gathered, that can ease
# the plotting, compatible with gnuplot/R.
# By now, this script copy all data (logs generated an final table) to a
# personal frontend-node in Grid5000. This should be modified in the near
# future.

#####
# MODIFIABLE PARAMETERS: SGPATH, SGHASH, sizes, threads, log_folder, file_table
# host_info, timefmt, cp_cmd, dest.

# Path to installation folder needed to recompile chord
# If it is not set, assume that the path is '/usr/local'
if [ -z "$1" ]
then
    SGPATH='/usr/local'
else
    SGPATH=$1
fi

# Save the revision of SimGrid used for the experiment
SGHASH=$(git rev-parse --short HEAD)

# List of sizes to test. Modify this to add different sizes.
sizes=(1000) # 3000 5000 10000 25000 50000 75000

# Number of threads to test.
threads=(2) # 4 8 16 24

# Path where to store logs, and filenames of times table, host info
log_folder="log/"
if [ ! -d "$log_folder" ]; then
    echo "Please create $log_folder directory before."
    exit 1
fi

file_table="timings_$(SGHASH).csv"
host_info="host_info.org"
rm -rf $host_info

# The las %U is just to ease the parsing for table
timefmt="clock:%e user:%U sys:%S elapsed:%e swapped:%W exitval:%x max:%Mk avg:%Kk %U"

# Copy command. This way one can use cp, scp and a local folder or a folder in
# a cluster.
sep=', '
cp_cmd='cp'
dest=$log_folder # change for <user>@<node>.grid5000.fr:~/ $log_folder if necessary
#####

```

```
#####
echo "Recompile the binary against $SGPATH"
export LD_LIBRARY_PATH="$SGPATH/lib"
rm -rf chord
gcc chord.c -L$SGPATH/lib -I$SGPATH/include -I$SGPATH/src/include -lsimgrid -o chord

if [ ! -e "chord" ]; then
    echo "chord does not exist"
    exit;
fi
#####

#####
# PRINT HOST INFORMATION IN DIFFERENT FILE
set +e
echo "#+TITLE: Chord experiment on $(eval hostname)" >> $host_info
echo "#+DATE: $(eval date)" >> $host_info
echo "#+AUTHOR: $(eval whoami)" >> $host_info
echo " " >> $host_info

echo "* People logged when experiment started:" >> $host_info
who >> $host_info
echo "* Hostname" >> $host_info
hostname >> $host_info
echo "* System information" >> $host_info
uname -a >> $host_info
echo "* CPU info" >> $host_info
cat /proc/cpuinfo >> $host_info
echo "* CPU governor" >> $host_info
if [ -f /sys/devices/system/cpu/cpu0/cpufreq/scaling_governor ];
then
    cat /sys/devices/system/cpu/cpu0/cpufreq/scaling_governor >> $host_info
else
    echo "Unknown (information not available)" >> $host_info
fi
echo "* CPU frequency" >> $host_info
if [ -f /sys/devices/system/cpu/cpu0/cpufreq/scaling_cur_freq ];
then
    cat /sys/devices/system/cpu/cpu0/cpufreq/scaling_cur_freq >> $host_info
else
    echo "Unknown (information not available)" >> $host_info
fi
echo "* Meminfo" >> $host_info
cat /proc/meminfo >> $host_info
echo "* Memory hierarchy" >> $host_info
lstopo --of console >> $host_info
echo "* Environment Variables" >> $host_info
printenv >> $host_info
echo "* Tools" >> $host_info
echo "*** Linux and gcc versions" >> $host_info
cat /proc/version >> $host_info
echo "*** Gcc info" >> $host_info
gcc -v 2>> $host_info
echo "*** Make tool" >> $host_info
make -v >> $host_info
echo "*** CMake" >> $host_info
cmake --version >> $host_info
echo "* SimGrid Version" >> $host_info
grep "SIMGRID_VERSION_STRING" ../../../../include/simgrid_config.h | sed 's/.*\"(.*)\"[^\"]*$/\1/' >> $host_info
echo "* SimGrid commit hash" >> $host_info
git rev-parse --short HEAD >> $host_info
${$cp_cmd $host_info $dest}
#####
```

```
#####
# ECHO TABLE HEADERS INTO FILE_TABLE
rm -rf $file_table
tabs_needed=""
for thread in "${threads[@]"; do
thread_line=$thread_line"\t"$thread
done
thread_line=$thread_line$thread_line
for size in $(seq 1 $((#${threads[@]}-1))); do
tabs_needed=$tabs_needed"\t"
done
echo "#SimGrid commit $SGHASH" >> $file_table
echo -e "#\t\tconstant${tabs_needed}precise" >> $file_table
echo -e "#size/thread$thread_line" >> $file_table
#####

#####
# START SIMULATION

test -e tmp || mkdir tmp
me=tmp/`hostname -s`

for size in "${sizes[@]"; do
line_table=$size
# CONSTANT MODE
for thread in "${threads[@]"; do
filename="chord_${size}_threads${thread}_constant.log"
output="sr_${size}_threads${thread}_constant.log"
rm -rf $filename

if [ ! -f chord$size.xml ]; then
./generate.py -p -n $size -b 32 -e 10000
fi

if [ ! -f One_cluster_nobb_${size}_hosts.xml ]; then
./generate.py -d -n $size
fi

echo "$size nodes, constant model, $thread threads"
cmd="./chord One_cluster_nobb_"$size"_hosts.xml chord$size.xml --cfg=contexts/stack_size:16 --cfg=network/model:Con

/usr/bin/time -f "$timefmt" -o $me.timings $cmd $cmd 1>/tmp/stdout-xp 2>/tmp/stderr-xp

if grep "Command terminated by signal" $me.timings ; then
echo "Error detected:"
temp_time="errSig"
elif grep "Command exited with non-zero status" $me.timings ; then
echo "Error detected:"
temp_time="errNonZero"
else
temp_time=$(cat $me.timings | awk '{print $(NF)}')
fi

# param
cat $host_info >> $filename
echo "* Experiment settings" >> $filename
echo "size:$size, constant network, $thread threads" >> $filename
echo "cmd:$cmd" >> $filename
#stdout
echo "* Stdout output" >> $filename
cat /tmp/stdout-xp | grep Amdahl >> $filename
```

```

#stderr
echo "* Stderr output" >> $filename
cat /tmp/stderr-xp >> $filename
# time
echo "* Timings" >> $filename
cat $me.timings >> $filename
line_table=$line_table$sep$temp_time
# Gather SR data from logs
echo -e '#id_sr\ttime_taken\tamount_processes' >> $output
grep 'Total time SR' $filename | awk '{print $7 "\x09" $9 "\x09" $10}' | tr -d ',,' >> $output
${$cp_cmd $output $dest}
${$cp_cmd $filename $dest}
rm -rf $filename $output
rm -rf $me.timings
done

#PRECISE MODE
for thread in "${threads[@]"; do
echo "$size nodes, precise model, $thread threads"
filename="chord_${size}_threads_${thread}_precise.log"
output="sr_${size}_threads_${thread}_precise.log"

cmd="./chord One_cluster_nobb "$size"_hosts.xml chord$size.xml --cfg=contexts/stack_size:16 --cfg=maxmin/precision:
/usr/bin/time -f "$timefmt" -o $me.timings $cmd $cmd 1>/tmp/stdout-xp 2>/tmp/stderr-xp

if grep "Command terminated by signal" $me.timings ; then
echo "Error detected:"
temp_time="errSig"
elif grep "Command exited with non-zero status" $me.timings ; then
echo "Error detected:"
temp_time="errNonZero"
else
temp_time=$(cat $me.timings | awk '{print $(NF)}')
fi
# param
cat $host_info >> $filename
echo "* Experiment settings" >> $filename
echo "size:$size, constant network, $thread threads" >> $filename
echo "cmd:$cmd" >> $filename
#stderr
echo "* Stderr output" >> $filename
cat /tmp/stderr-xp >> $filename
# time
echo "* Timings" >> $filename
cat $me.timings >> $filename
line_table=$line_table$sep$temp_time
# Gather SR data from logs
echo -e '#id_sr\ttime_taken\tamount_processes' >> $output
grep 'Total time SR' $filename | awk '{print $7 "\x09" $9 "\x09" $10}' | tr -d ',,' >> $output
${$cp_cmd $output $dest}
${$cp_cmd $filename $dest}
rm -rf $filename $output
rm -rf $me.timings
done
echo -e $line_table >> $file_table
done

${$cp_cmd $file_table $dest}
rm -rf $file_table
rm -rf tmp

```

A.3 Modifiable Parameters

Some of the parameters to run the experiments can be modified, like the amount of nodes to simulate and the amount of threads to use. Note that the list of nodes to simulate will have to be changed manually in ??.

```
SGPATH='/usr/local'
# Save the revision of SimGrid used for the experiment
SGHASH=$(git rev-parse --short HEAD)
sizes=(1000 3000)
threads=(1 2 4 8 16 24)
```

A.4 Amdahl speedup

The benchmark can be run from this org-mode file, or simply by running `./scripts/chord/testall.sh` (in this repository) inside the folder `examples/msg/chord` of your SimGrid installation. Inside that script, the number of threads to test, as well as the amount of nodes, can be modified

The constant `TIME_BENCHAMDAHL` must be defined in SimGrid in order to enable the required logs for this experiment. This variable can be defined in the file `src/simix/smx_private.h`

The script generates a .csv table, but just in case it is done in different stages, the gathered logs can be processed with `gettimes.py`, located in the same folder as `testall.sh`. This generates a .csv that can easily be plotted with R/gnuplot.

The script is self-documented.

```
cd $BASE_DIR/Simpar/SimGrid/examples/msg/chord
```

A.5 SR Distribution

To enable Scheduling Rounds benchmarks, the constant `TIME_BENCHPERSR` has to be defined. It can be defined in `src/simix/smx_private.h`. The logs give information about the time it takes to run a scheduling round, as well as the amount of processes each SR takes. For this experiment, we are only interested in the amount of processes taken by each SR.

The script to run this experiment is `./scripts/chord/testall_sr.sh`, the id of SR, time of SR and num processes of SR, in a table format.

This can be run from here or just by running `testall_sr.sh` in the `examples/msg/chord` folder of your SimGrid install.

```
cd $BASE_DIR/Simpar/SimGrid/examples/msg/chord
```

A.6 SR Times

The data set used for this plot is the same as the one before. We just use the data of the sequential simulations (1 thread).

A.7 Binding threads to physical cores

The constant `CORE_BINDING` has to be defined in `src/xbt/parmap.c` in order to enable this optimization. The benchmark is then run in the same way as the Amdahl Speedup experiment.

```
cd $BASE_DIR/Simpar/SimGrid/examples/msg/chord
```

A.8 parmap between N cores

This may be the experiment that requires more work to reproduce:

1. maestro works with N-1 threads This is the default setting and the standard benchmark can be used.

```
cd $BASE_DIR/Simpar/SimGrid/examples/msg/chord
```

2. maestro sleeps with N-1 threads To avoid that maestro works with the threads, comment out the line: `xbt_parmap_work(parmap);` from the function `xbt_parmap_apply()` in `src/xbt/parmap.c`

```
cd $BASE_DIR/Simpar/SimGrid/examples/msg/chord
```

3. maestro sleeps with N threads To avoid that maestro works with the threads, comment out the line: `xbt_parmap_work(parmap);` from the function `xbt_parmap_apply()` in `src/xbt/parmap.c`. Then the function `src/xbt/parmap.c:xbt_parmap_new` has to be modified to create one extra thread. It is easy: just add 1 to `num_workers` parameter.

```
cd $BASE_DIR/Simpar/SimGrid/examples/msg/chord
```

A.9 Busy Waiters vs. Futexes performance

Enable the use of busy waiters running chord with the extra option: `-cfg=contexts/synchro:busy_wait`. The experiment was run with `testall.sh` using that extra option in the chord command inside the script. The tables were constructed using `gettimes.py`. The data regarding the futexes synchro times is the same gathered in Amdahl Speedup experiment.

```
cd $BASE_DIR/Simpar/SimGrid/examples/msg/chord
```

A.10 Performance Regression Testing

A.11 SR parallel threshold

The data set is the same as SR Distribution and SR times experiments.

A.12 Adaptive Algorithm

The benchmark is done using testall.sh. The algorithm is the one described in section 5.2

```
cd $BASE_DIR/Simpar/SimGrid/examples/msg/chord
```