
BUSINESS PHILOSOPHY

We do not seek merely to expand our business volume.
Rather, we are dedicated to the use of our unique, innovative technology to contribute to the culture, benefits and welfare of people throughout the world. It is the intention of our corporation to grow hand-in-hand with our employees, encouraging and aiding them to reach their full potential and improve their standard of living.
Our future prosperity is directly linked to the prosperity of our customers, dealers and shareholders ...indeed, the entire Sharp family.

BUSINESS CREED


Sharp Corporation is dedicated to two principal ideals:
"Sincerity and Creativity"

Sincerity is a virtue fundamental to humanity … always be sincere
Harmony brings strength ... trust each other and work together.
Politeness is a merit ... always be courteous and respectful.
Creativity promotes progress ... remain constantly aware of the need to innovate and improve. Courage is the basis of a rewarding life ... accept every challenge with a positive attitude.

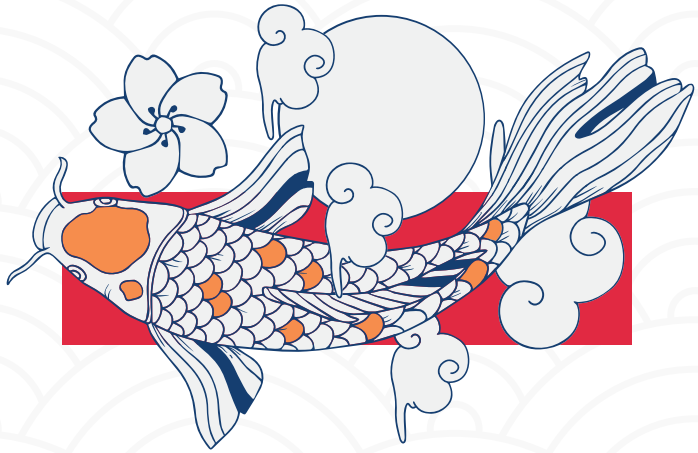

A PASSION PASSED DOWN FROM OUR FOUNDER

“Make products that others want to imitate.” These words, spoken by Sharp founder Tokuji Hayakawa, exemplify his management concept of contributing to society through the company’s technologies and manufacturing. This concept is realized by being the first to make products that meet the needs of a new era and by becoming a corporation that is known and trusted by society. In 1973, Sharp articulated this spirit in the company’s business philosophy and business creed. This spirit has been passed down continuously over the generations, ever since the company’s founding over 110 years ago.

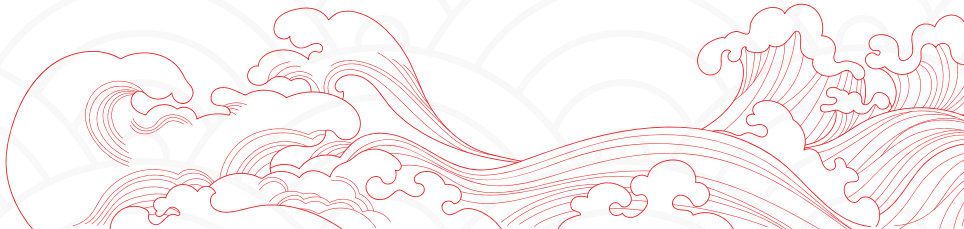

JOURNEY OF INNOVATION

1915

Ever-Ready Sharp Pencil

Tokuji Hayakawa invented the mechanical pencil, starting Sharp's innovation journey.



1958

Water-cooled Air Conditioner

Sharp's entry into the AC market with its first water-cooled AC.



1968

Sharp's 1st Split AC

Introduced the first split AC, revolutionizing home cooling.



1983

World's 1st RAC with an Expansion Valve

Launched world's first RAC with an expansion valve; second to introduce inverter technology.



1995

Sharp's 1st RAC for Cold Climate

Designed the first AC for cold climates.



1996

1st RAC with 5 Functions

Introduced cooling, heating, humidification, dehumidification, and ventilation in one AC.



20

1st R PCI T

Enhanced Plasmaclu



03

AC with
Technology

l air quality with
uster Ion technology.



2007

1st RAC with Long Panel Technology

Improved airflow and efficiency with Long Panel Technology.



2013

India's 1st Inverter RAC

Combined energy efficiency with advanced technology in DC-powered RACs



2019

1st "AIREST" Air Purifier in Air-Conditioner

Elevated air quality with the AIREST air purifier function.



2025

Sharp AC Re-launched in India

Re-entered the Indian market with a new range of air conditioners.



2026

Expanding the Ac Portfolio in India

Expanding in India to deliver advanced cooling solutions for every Indian home.



India First Window AC with active Air Purifier

Redefining window ACs with active air purification , India's first to deliver cooling and cleaner air together.



The Art *of* Cooling

For over a century, **Sharp has been perfecting the harmony between technology and craftsmanship.** Rooted in Japan - where precision is a way of life -Sharp brings a philosophy that sees cooling not just as performance, but as an experience.

Innovated in Japan. Designed for Indian needs.
Every Sharp Air Conditioner carries the discipline of Japanese engineering, thoughtfully adapted to India's diverse climate, power conditions, and everyday usage. From intense summers to long operating hours, Sharp ACs are built to perform with quiet confidence and lasting reliability.

Here, art meets craftsmanship. Where design is purposeful, engineering is meticulous, and technology works with effortless elegance.
At Sharp, innovation doesn't overwhelm - it **flows seamlessly**, creating comfort that feels natural, consistent, and refined. Cooling that responds intelligently. Performance that endures. Air that feels purer.

Because cooling should do more than reduce temperature.
It should **enhance the way you live.**

SHARP AIR CONDITIONERS
THE ART OF COOLING

The Art *of* Innovation

WHAT IS PLASMACLUSTER?

Plasmacluster ions are the same type of positive and negative ions that occur in nature. This proprietary Sharp technology purifies air, and it has been proven safe to humans no matter the ion concentration. Highly concentrated levels of Plasmacluster ions have been proven to purify air, eliminate odors, moisten facial skin, and reduce static electricity.

PLASMACLUSTER IONS KEEP PEOPLE AND THE AIR AROUND THEM HEALTHY.

Plasmacluster

PLASMACLUSTER TECHNOLOGY

Air as Natural as Nature

Scan to know more

Certified by The British Allergy Foundation

Certified Over 45 Institutes and Organizations

IIT DELHI PROFESSORS Dr. Gazala Habib Dr. Sagnik Dey PROVEN PCI TECHNOLOGY

JAPAN TECHNOLOGY

BENEFITS OF PLASMACLUSTER

Suppress activity of airborne viruses

Suppress activity of airborne bacteria

Suppress activity of airborne allergens

Eliminates airborne mold

Fungi

Eliminates odors


HOW PLASMACLUSTER IONS ARE GENERATED

Positive and negative ions are generated through plasma discharge

Ions have positive or negative charges. To ionize the water and oxygen in the air, Sharp came up with the idea of using plasma discharge to give water a positive charge and oxygen a negative charge. Through plasma discharge, in which voltage is applied to the discharge electrode, positive hydrogen ions (H+) and negative oxygen ions (O_2-) are generated from the water and oxygen in the air.

Ions form clusters for greater stability

The positive hydrogen ions (H+) and negative oxygen ions (O_2-) each have an electrical charge. This attracts water molecules in the air (H_2O), which surround the ions and form stable cluster ions

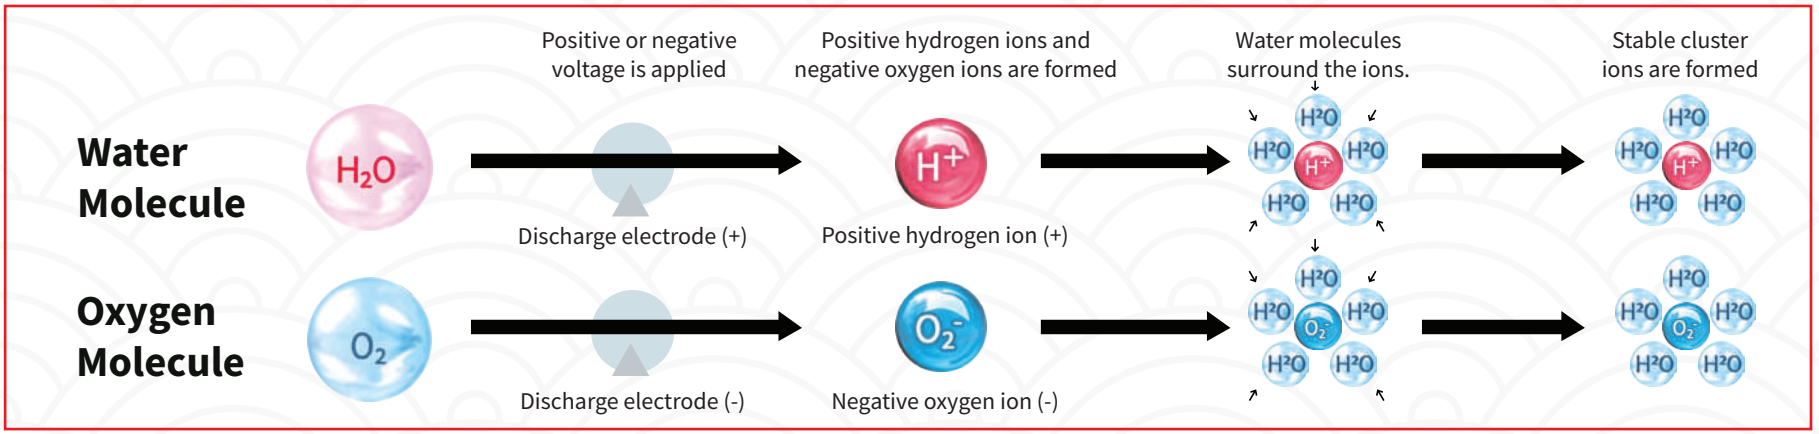

HI-TECH INVERTER
EFFICIENT COOLING WITH LOWER ENERGY CONSUMPTION

The Hi-Tech Inverter technology adjusts compressor speed continuously to match cooling demand, delivering faster and more efficient cooling while significantly reducing power consumption compared to conventional air conditioners.

7-IN-1 CONVERTIBLE COOLING
COOLING THAT ADAPTS TO EVERY NEED

The 7-in-1 Convertible AC allows you to adjust cooling capacity across multiple modes, matching room conditions and usage requirements. Enjoy efficient cooling with optimised power consumption—whether you need full performance or energy-saving operation.

TOUCH CONTROLS
EFFORTLESS CONTROL AT YOUR FINGERTIPS

The intuitive touch control panel allows smooth and responsive operation with a simple tap. Designed for ease of use, it offers quick access to key functions while adding a modern, premium look to the air conditioner.

TWIN MOTOR TECHNOLOGY
EFFICIENT, STABLE AND LONG-LASTING PERFORMANCE

Twin Motor Technology uses two dedicated motors - one for the compressor and one for the fan - for efficient performance. This ensures faster cooling, consistent airflow, and improved energy efficiency.**

**applicable on Window AC

ENERGY SAVING MODE
OPTIMISED COOLING WITH LOWER POWER CONSUMPTION

Energy Saving Mode intelligently adjusts cooling performance to reduce electricity usage while maintaining comfortable indoor temperatures, making everyday operation more efficient.

GROOVED CAPILLARY TUBES
EFFICIENT COOLING WITH IMPROVED HEAT EXCHANGE

The grooved capillary tubes increase the surface area for refrigerant flow, enabling better heat exchange and more efficient cooling. This design improves performance while helping reduce overall energy consumption.



HEAVY DUTY COOLING
POWERFUL COOLING FOR EXTREME CONDITIONS

Designed to perform even in high temperatures, Heavy Duty Cooling delivers consistent and rapid cooling, ensuring comfort is maintained regardless of external heat or continuous operation.



The Art *of* Comfort



COANDA AIR FLOW EVEN COOLING, NATURALLY DISTRIBUTED

By using the Coanda effect, the air conditioner guides airflow smoothly across surfaces, improving air circulation and maintaining consistent temperature throughout the room.



4-WAY SWING UNIFORM COOLING IN EVERY DIRECTION

The 4-Way Swing function automatically directs airflow both horizontally and vertically, nsuring even distribution of cool air across the room for consistent and balanced comfort.



QUICK FREEZE

Quick Freeze Control enables the compressor to ramp up to high operating frequency mmediately at start-up, delivering large cooling capacity within seconds. By increasing refrigerant flow and compressor speed rapidly, the system achieves faster temperature pull-down, allowing the air outlet temperature to reach around 22°C in approximately 20 seconds, ensuring instant comfort during extreme heat conditions.



AUTO RESTART COMFORT RESUMES AUTOMATICALLY

In the event of a power failure, the air conditioner automatically restarts with the previously set temperature and mode once electricity is restored, ensuring uninterrupted comfort without manual intervention.



DUST FILTER

The advanced Dust Filter effectively traps dust, pollen, and other common airborne impurities, helping keep the air inside your home cleaner and fresher. By reducing everyday pollutants, it supports easier breathing, minimizes irritation caused by airborne particles, and contributes to a healthier and more comfortable living environment for you and your family.

LOW NOISE OPERATION
COOLING YOU CAN BARELY HEAR

Advanced airflow design and optimised compressor operation help minimise operating noise, delivering effective cooling without disturbance.

TOP AIR THROW
FASTER, WIDER COOLING FROM ABOVE

The Top Air Throw design releases cool air from the upper section of the unit, allowing airflow to travel farther and spread evenly across the room for quicker and more uniform cooling.

LONG AIR THROW POWERFUL
AIRFLOW THAT REACHES FARTHER

Designed to project air over long distances, this feature helps maintain consistent temperature throughout the room, enhancing comfort in spacious living areas.

AUTO AIR SWING
EVEN COOLING, AUTOMATICALLY

Auto Air Swing automatically moves the air louvers to distribute cool air evenly across the room, ensuring consistent comfort in every corner without manual adjustment.

The Art *of* Reliability



BLDC MOTORS EFFICIENT, RELIABLE, AND LONG-LASTING

By intelligently controlling airflow angle and speed, this function avoids direct cold drafts, reducing physical discomfort and creating a healthier indoor environment for the entire family.



ANTI-CORROSION COATING U-BEND PROTECTS AND LASTS LONGER

In the event of a power failure, the air conditioner automatically restarts with the previously set temperature and mode once electricity is restored, ensuring uninterrupted comfort without manual intervention.




SELF-DIAGNOSIS SMART, HASSLE-FREE MAINTENANCE

The advanced Dust Filter effectively traps dust, pollen, and other common airborne impurities, helping keep the air inside your home cleaner and fresher. By reducing everyday pollutants, it supports easier breathing, minimizes irritation caused by airborne particles, and contributes to a healthier and more comfortable living environment for you and your family.



100% COPPER BUILT FOR EFFICIENCY AND DURABILITY

The air conditioner uses 100% copper condenser and connecting tubes, offering superior heat transfer, improved cooling efficiency, and long-lasting performance even in demanding conditions.



NANO TECH COATING ENHANCED PROTECTION FOR LONGER LIFE

Nano Tech Coating forms a protective layer on critical components, helping prevent corrosion, moisture damage, and dust accumulation. This improves durability, maintains performance, and extends the life of the air conditioner.



R32 REFRIGERANT EFFICIENT AND ECO-FRIENDLY COOLING

Uses R32 refrigerant for higher energy efficiency, lower environmental impact, and faster, more effective cooling.

OUTDOOR UNIT SELF-CLEANING FUNCTION AUTOMATIC CLEANING FOR LONG-LASTING EFFICIENCY

Through intelligent frosting and defrosting, the outdoor unit cleans the heat exchanger thoroughly.
The reverse fan operation after shutdown helps prevent dust buildup, ensuring stable performance and improved durability of the outdoor unit.

STABILIZER-FREE OPERATION HASSLE-FREE, RELIABLE PERFORMANCE

Operates smoothly across voltage fluctuations without the need for an external stabilizer, ensuring consistent cooling and peace of mind.

10-YEAR COMPRESSOR WARRANTY RELIABILITY YOU CAN TRUST

10 YEARS WARRANTY

Backed by a decade-long warranty, the compressor ensures long-lasting performance and gives you complete peace of mind.


5-YEAR COMPREHENSIVE WARRANTY FOR COMPLETE PEACE OF MIND.

5 YEARS WARRANTY

Covers your product completely, so you can use it stress-free.




The Art *of* Safety



IDU CONTROL BOX SHEET METAL SHIELDING

Durable protection for reliable performance The Indoor Unit (IDU) control box is shielded with robust sheet metal, safeguarding internal components from dust, impacts, and environmental factors. This ensures long-lasting reliability, enhanced safety, and consistent performance for your air conditioner.

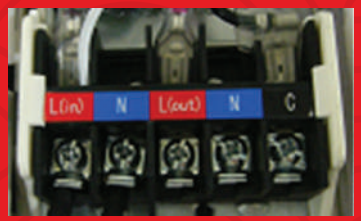

PRECISION THERMAL FUSE

Thoughtfully engineered safety at the core A high-accuracy thermal fuse is integrated into the IDU terminal block and is calibrated to activate at 98°C. In the event of abnormal heat rise, it automatically cuts off power, protecting critical components and reinforcing safe, dependable performance—engineered with uncompromising attention to detail.



ODU TERMINAL NON-FLAMMABLE TERMINAL SHIELD

Engineered safety for worry-free operation The Outdoor Unit (ODU) terminal block is protected with a non-flammable sheet metal cover, enhancing safety by reducing fire risk and shielding critical electrical connections from external elements. This robust design ensures stable, secure, and reliable performance even in demanding conditions.



HOT WIRE IGNITION TEST

Proven resistance against fire hazards Critical electrical components undergo a rigorous Hot Wire Ignition Test to evaluate their resistance to ignition under extreme thermal stress. This stringent testing ensures enhanced fire safety, greater durability, and dependable operation—even in demanding conditions.


JAPAN QUALITY 7 SHIELDS

Seven layers of protection,
perfected by japanese engineering.



FIRE SHIELD

Sharp Air Conditioners are protected from fire. The outdoor circuit meets USA safety standards. Fire tests ensure the unti-fired unit structure due to the 6-sided all-metal enclosure for circuit board.




UV SHIELD

Sharp Air Conditioners are protected from sunlight. The UV resistance painted part is to protect outdoor unit from extreme weather.



VOLTAGE SHIELD

Sharp Air Conditioners are protected from unstable voltage. It can stabilizes the electric voltage and keep the operation between 130V and 264 V. Voltage tests ensure the high drive force even in areas with unstable voltage.



SURGE SHIELD

Sharp Air Conditioners are protected from lightning. The design of the electric circuit protects the air conditioner from struck by lightning. Surge tests ensure the durability for damage by stabilizing voltage spikes caused by thunder strikes or lightning.



HEAT SHIELD

Sharp Air Conditioners are protected by high temperature. Its intelligent sensor is well-operate even under high outdoor temperature.



CORROSION SHIELD

Sharp Air Conditioners are protected from rusting. Its special coating for indoor and outdoor heat exchanger is to prevent rust and enhances the durability of the air conditioner. Corrosion tests ensure the quality of anti-rust by spraying salt water.




SQUALL SHIELD

Sharp Air Conditioners are protected from squall (heavy rains). The water resistant outdoor unit is always protected from water even typhoon. Squall tests ensure the durability for downpours and thunderstorms.

7 IN 1 CONVERTIBLE

SMART ENERGY REGULATION. TAILORED COMFORT.

Precision Mode Control intelligently adjusts cooling output based on real-time room conditions.
Instead of running at full power constantly, the system fine-tunes compressor performance across multiple levels—delivering only the cooling you need, when you need it.

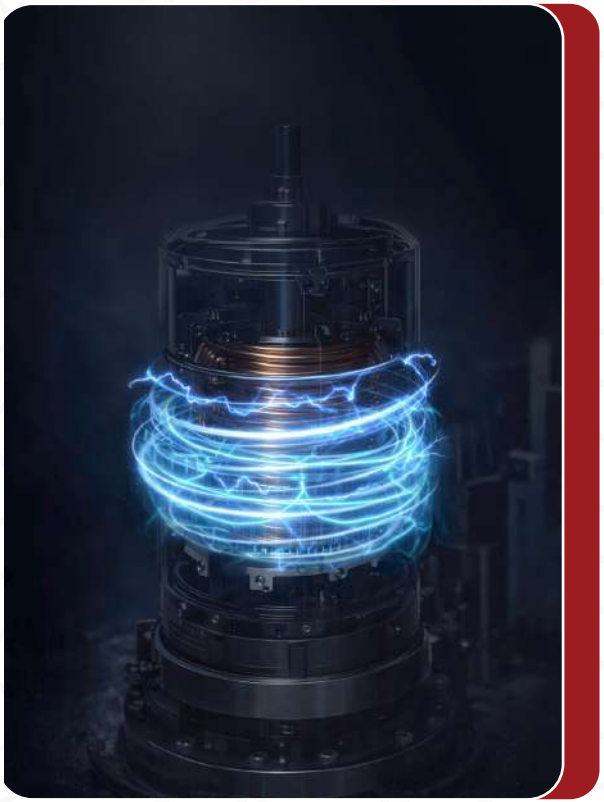

50%
Eco Mode
For energy-saving and minimal cooling.



60%
Solo Mode
Ideal for personal use or quiet time.



70%
Focus Mode
Perfect for working or staying productive.





80%

Relax Mode

Designed for cozy and comfortable settings.



90%

Chill Mode

Keeps the ambiance cool and pleasant.



100%

Regular Mode

The go-to mode for everyday cooling.



110%

Party Mode

Brings powerful cooling for lively celebrations.



55° Cools at 55°

JAPAN QUALITY 7 SHIELDS

4 Way Auto Swing

7 IN 1 7-in-1 Convertible

Gas Leakage Sensor

冷涼

REIRYOU

(PURE COOLING POWER)

HI-TECH INVERTER Hi Tech Inverter

Dust Filter

100% COPPER 100% Copper

Turbo Cool



REIRYOU SERIES

AH-SI12V3B-SCN	AH-SI17V3B-SCN	AH-SI18V3B-SCN	AH-SI17V5B-SCN	AH-SI18V5B-SCN	AH-SI24V3B-SCN
0.95 Ton, 3 Star	*1.37 Ton, 3 Star*	*1.42 Ton, 3 Star*	*1.34 Ton, 5 Star*	*1.48 Ton, 5 Star*	*1.8 Ton, 3Star*
Cooling Capacity: 3350	*Cooling Capacity: 4800*	*Cooling Capacity: 5000*	*Cooling Capacity: 4700*	*Cooling Capacity: 5210*	*Cooling Capacity: 6200*

Feature may also vary model to model



SEIRYO / REIRYOU SERIES

AH-SI19V3B-SC	AH-SI18V5B-SC	AH-SI12V3B-GC	AH-SI18V3B-GC	AH-SI19V3B-GC	AH-SI24V3B-GC	AH-SI18V5B-GC
1.5 Ton, 3 Star	*1.5 Ton, 5 Star*	*1.0 Ton, 3 Star*	*1.5 Ton, 3 Star*	*1.5 Ton, 3 Star*	*2.0 Ton, 3 Star*	*1.5 Ton, 5 Star*
Cooling Capacity: 5000	*Cooling Capacity: 5210*	*Cooling Capacity: 3350*	*Cooling Capacity: 4700*	*Cooling Capacity: 5000*	*Cooling Capacity: 6270*	*Cooling Capacity: 4700*

Feature may also vary model to model

Plasmacluster

JAPAN QUALITY 7 SHIELDS

HEAVY DUTY

Heavy-Duty Performance

Turbo Cool

4 IN 1

4-in-1 Convertible

52°

Cools at 52°C

涼風


RYOHU

(PURE COOL AIR)

HI-TECH INVERTER

Hi Tech Inverter

Touch Display with Precision Temp

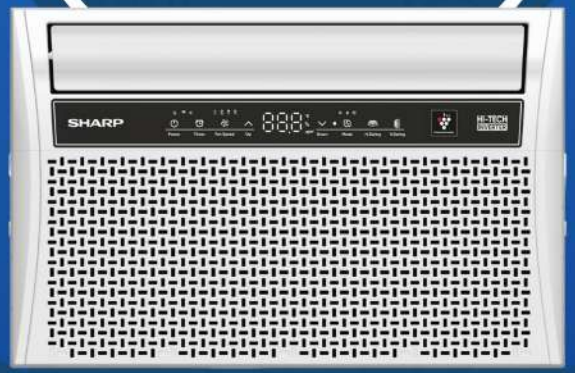

4 Way Auto Swing

Coanda Air Flow

WINDOW AC TOP THROW SERIES

AF-TA18V3X-GCP	AF-TA18V5X-GCP	AF-TA18V3X-HCP	AF-TA18V5X-HCP
1.45 Ton, 3 Star	*1.45 Ton, 5 Star*	*1.45 Ton, 3 Star*	*1.45 Ton, 5 Star*
Cooling Capacity: 5100	*Cooling Capacity: 5100*	*Cooling Capacity: 5100*	*Cooling Capacity: 5100*

Feature may also vary model to model

JAPAN QUALITY 7 SHIELDS

Anti- Corrosion Coating

Turbo Cool

Low Noise

Dust Filter

52°


Cools at 52°C

涼風
RYOHU-FS
(PURE AUTUMN BREEZE)

100% COPPER

100% Copper

Energy Saving Mode

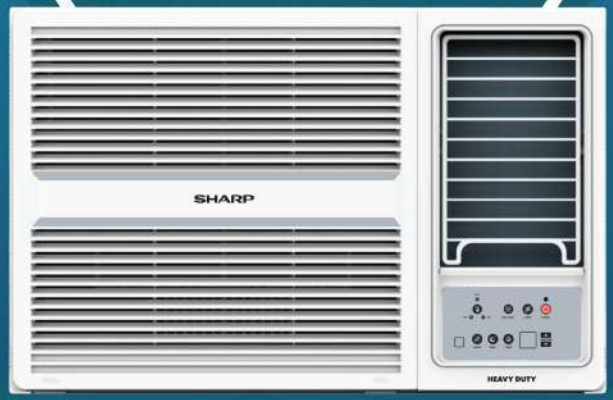

HEAVY DUTY

Heavy-Duty Performance

LONG AIR THROW

Long Air Throw

WINDOW AC FS SERIES

AF-WA18F3X-SCN	AF-WA22F2X-SCN
1.41 Ton, 3 Star	*1.70 Ton, 2 Star*
Cooling Capacity: 4950	*Cooling Capacity: 5975*

Feature may also vary model to model

TECHNICAL SPECIFICATIONS 2026

SERIES			冷涼 REIRYOU					
								
	MODEL CODE		**AH-SI12V3B-SCN**	**AH-SI17V3B-SCN**	**AH-SI18V3B-SCN**	**AH-SI17V5B-SCN**	**AH-SI18V5B-SCN**	**AH-SI24V3B-SCN**
	TYPE OF AC		**SPLIT AIR CONDITIONER**					
	PARAMETERS	UNITS	12K 3* INV	17K 3* INV	18K 3* INV	17K 5* INV	18K 5* INV	24K 3* INV
Clasification	Tonnage	Details	0.95	1.37	1.42	1.34	1.48	1.8
	Star Rating : As per New BEE Guideline	Details	3 Star	3 Star	3 Star	5 Star	5 Star	3 Star
	ISI Approval (IS 1391 Part1/ Part 2) : Complete Product	Details	Yes	Yes	Yes	Yes	Yes	Yes
	RoHS : Product & Accessories	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
Operating Conditions	Rated Voltage, Frequency, Phase	V,Hz,Ph	AC 230V, 50 Hz, 1Ph	AC 230V, 50 Hz, 1Ph	AC 230V, 50 Hz, 1Ph	AC 230V, 50 Hz, 1Ph	AC 230V, 50 Hz, 1Ph	AC 230V, 50 Hz, 1Ph
	Withstanding Voltage , Frequency, Phase	V,Hz,Ph (±5%)	AC 155 - 285V, 50 Hz, 1Ph	AC 155 - 285V, 50 Hz, 1Ph	AC 155 - 285V, 50 Hz, 1Ph	AC 155 - 285V, 50 Hz, 1Ph	AC 155 - 285V, 50 Hz, 1Ph	AC 155 - 285V, 50 Hz, 1Ph
	Withstanding Operating conditions : IDU	℃	16 - 31 °C	16 - 31 °C	16 - 31 °C	16 - 31 °C	16 - 31 °C	16 - 31 °C
	Withstanding Operating conditions : ODU	℃	18 - 55 °C	18 - 55 °C	18 - 55 °C	18 - 55 °C	18 - 55 °C	18 - 55 °C
	Cooling Area	m2	8 - 9	11 - 14	11 - 14	11 - 14	11 - 14	15 - 18
	IDU & ODU Max Installation Distance	m	15	15	15	15	15	15
	IDU & ODU Max Vertical Installation Distance	m	5	5	5	5	5	5
Cooling	Capacity at 100% of full capacity	W	**3350**	**4800**	**5000**	**4700**	**5210**	**6200**
	Capacity at 50% of full capacity	m	1675	2400	2500	2350	2605	3100
	ISEER	kWh / kWh	4.35	4.35	4.35	5.65	5.65	4.35
	Cooling Input Current	A (±5%)	4.60	6.4	9.7	TBC	TBC	8.5
MAX Capacity	Max Cooling Capacity	W	3500	5000	5475	5100	6000	6600
	Max Heating Capacity	W	NA	NA	NA	NA	NA	NA
IDU General	Indoor side air flow (Max)	m3/h (±5%)	507.29	836.09	932.41	969.82	1266.78	1122.74
	Indoor side noise level : Turbo/Hi/Mi/Low	dB(A) (±5%)	42/40/35/32	48/46/42/35	48/46/42/35	48/46/42/35	48/46/44/39	48/46/44/39
	Dimensions : L*W*H	mm (±10)	770 x 250 x 205	900 x 294 x 206	900 x 294 x 206	1010 x 316 x 220	1010 x 316 x 220	1010 x 316 x 220
	Packing : L*W*H	mm (±10)	846 x 321 x 269	990 x 375 x 287	990 x 375 x 287	1096 x 390 x 297	1096 x 390 x 297	1096 x 390 x 297
	Weight : Net & Gross	Kg (±5%)	9 [10]	11 [13]	11 [13]	14 [16]	14 [16]	14 [16]
	Refrigerant/Nitrogen Filled in IDU during Production : Details , Qty	Details, Gram	R32	R32	R32	R32	R32	R32
IDU Fan motor	Motor Type : AC /BLDC	Details	DC	DC	DC	DC	DC	DC
IDU Evaporator	Fin Type : Slit/Louvered, Hydrophilic, Fin colour	Details	Slit, Hydrophilic, Gold Fins	Slit, Hydrophilic, Gold Fins	Slit, Hydrophilic, Gold Fins	Slit, Hydrophilic, Gold Fins	Slit, Hydrophilic, Gold Fins	Slit, Hydrophilic, Gold Fins
	Fin Material	Details	Al	Al	Al	Al	Al	Al
IDU PCB	Display PCB : LCD Display/ 7Seg Display/ LED indicators	Details	LCD Display	LCD Display	LCD Display	LCD Display	LCD Display	LCD Display
IDU Other	Filter Type : Inbuilt Dust Filter type, IS comply, Add on Filters types	Details	Dust Filter :HD Filter,ISI approved	Dust Filter :HD Filter,ISI approved	Dust Filter :HD Filter,ISI approved	Dust Filter :HD Filter,ISI approved	Dust Filter :HD Filter,ISI approved	Dust Filter :HD Filter,ISI approved
	Connecting wire between IDU & ODU : Length, Nos of Core, Thickness of each core	Details	3.5 m-4 Core,1 mm sq.,ISI approved	3.5 m - 4 Core, 1.5 mm sq, ISI approved	3.5 m - 4 Core, 1.5 mm sq, ISI approved	2, IDU Air In & Eva Tube	2, IDU Air In & Eva Tube	3.5 m - 4 Core, 1.5 mm sq, ISI approved
ODU General	Max Outdoor side Noise level	dB(A) (±5%)	52	53	53	53	53	53
	Dimension : L*W*H	mm (±10)	728 x 256 x 553	780 x 292 x 603	780 x 292 x 603	780 x 292 x 603	780 x 292 x 603	780 x 292 x 603
	Packing : L*W*H	mm (±10)	845 x 340 x 615	890 x 385 x 650	890 x 385 x 650	890 x 385 x 650	890 x 385 x 650	780 x 292 x 603
	Weight : Net, Gross	Kg (±5%)	24 [26]	28 [30]	28 [30]	30 [32]	30 [32]	31/[33]
Compressor	Compressor Type	Details	Single rotary	Single rotary	Single rotary	Single rotary	Single rotary	Single rotary
	Type : Fixed speed / Inverter	Details	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter
ODU Fan Motor	Motor Type : AC/BLDC	Details	BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
	Motors Mechanical output Wattage	Watt	33W	33W	33W	33W	33W	33W
	Outdoor Fan speed	R/min	1000	1000	1000	1000	1000	1000
	Thermal protector	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
Remote	RF / IR Based	Details	IR	IR	IR	IR	IR	IR
	Display	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
Features	Golden Hydrophilic Fin : Evaporator	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	Golden Hydrophilic Fin : Condenser	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	LCD Remote	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	LCD Remote screen with Backlight	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	Sleep mode	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	Timer Mode	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	Fan Mode	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	Fan Mode	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	Dry Mode	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	Turbo Mode	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	ECO Mode	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	Display ON-OFF	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	Variable Capacity : No of Modes, Percentage	Details	7 in 1	7 in 1	7 in 1	7 in 1	7 in 1	7 in 1
	Self Diagnosis	Details	7 in 1	7 in 1	7 in 1	7 in 1	7 in 1	7 in 1
	Gas leakage/ Low Gas Detection	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Restart Protection	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	100 % Copper	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	Hidden Display	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	4 Way Swing	Yes/ No	Yes	Yes	Yes	Yes	Yes	Yes
	ODU Works at Ambient Temp Upto	Yes/ No	Details 18°C - 55 °C	18°C - 55 °C	18°C - 55 °C	18°C - 55 °C	18°C - 55 °C	18°C - 55 °C

TECHNICAL SPECIFICATIONS 2025

SERIES			冷涼 REIRYOU		清涼 SEIRYO				
			 REIRYOU	 REIRYOU	 SEIRYO	 SEIRYO	 SEIRYO	 SEIRYO	 SEIRYO
MODEL NAME			**AH-SI19V3B-SC**	**AH-SI18V5B-SC**	**AH-SI12V3B-GC**	**AH-SI18V3B-GC**	**AH-SI19V3B-GC**	**AH-SI24V3B-GC**	**AH-SI18V5B-GC**
SEGMENT			1.5T 3 STAR	1.5T 5 STAR	1.0T 3 STAR	1.5T 3 STAR	1.5T 3 STAR	2.0T 3 STAR	1.5T 5 STAR
TYPE			COOL ONLY	COOL ONLY	COOL ONLY	COOL ONLY	COOL ONLY	COOL ONLY	COOL ONLY
CONTROL TYPE			REMOTE	REMOTE	REMOTE	REMOTE	REMOTE	REMOTE	REMOTE
RATED COOLING CAPACITY - FULL LOAD W			5000	5210	3350	4700	5000	6270	4700
RATED COOLING CAPACITY - HALF LOAD W			2500	2605	1675	2350	2500	3135	2605
RATED POWER - FULL LOAD W			1705	1315	1072	1579	1705	2035	1315
RATED POWER - HALF LOAD W			573	460	396	559	573	757	460
ISEER FOR COOLING W/W			3.9	5.15	3.95	3.85	3.9	3.88	5.15
INDOOR NOISE LEVEL(S/H/M/L/MUTE) dB(A)			32 ± 2 (low)	39 ±2 (low)	32 ± 2 (low)	35 ±2 (low)	35 ±2 (low)	39 ±2 (low)	39 ±2 (low)
OUTDOOR NOISE LEVEL dB(A)			52 ± 2	54 ±2	52 ± 2	52 ±2	52 ± 2	54 ±2	54 ±2
POWER SUPPLY			230V~/50Hz/1P	230V~/50Hz/1P	230V~/50Hz/1P	230V~/50Hz/1P	230V~/50Hz/1P	230V~/50Hz/1P	230V~/50Hz/1P
VOLTAGE RANGE V			155-285	155-285	155-285	155-285	155-285	155-285	155-285
ANNUAL ENERGY CONSUMPTION(COOLING) kwh			993.57 Units Per Year	782.92 Units Per Year	657.31 Units Per Year	946.17 Units Per Year	946.17 Units Per Year	1252.53 Units Per Year	782.92 Units Per Year
INDOOR AIR CIRCULATION(COOLING/HEATING) m3/h			800	1050	460	800	800	1050	1050
REFRIGERANT/CHARGE kg			R-32, 0.5	R-32, 0.7	R-32, 0.42	R-32, 0.48	R-32, 0.48	R-32, 0.74	R-32, 0.7
COMPRESSOR TYPE			Single Rotary	Single Rotary	Single Rotary	Single Rotary	Single Rotary	Single Rotary	Single Rotary
OPERATION TEMPERATURE RANGE °C			16°C ~ 55°C	16°C ~ 55°C	16°C ~ 55°C	16°C ~ 55°C	16°C ~ 55°C	16°C ~ 55°C	16°C ~ 55°C
NET DIMENSIONS (W X D X H)	INDOOR	mm	900 x 294 x 206	1010 x 316 x 220	770 x 250 x 205	900 x 294 x 206	900 x 294 x 206	1010 x 315 x 220	1010 x 316 x 220
	OUTDOOR	mm	780 x 292 x 603	780 x 292 x 603	728 x 256 x 553	780 x 292 x 603	780 x 292 x 603	780 x 292 x 603	780 x 292 x 603
NET WEIGHT	INDOOR	kg	11	13	8.5	10.5	11	14	13
	OUTDOOR	kg	25.5	29	21.5	24	25.5	30	29
PACKING DIMENSIONS (W X D X H)	INDOOR	mm	990 x 375 x 287	1096 x 390 x 297	846 x 321 x 269	990 x 375 x 287	990 x 375 x 287	1096 x 390 x 297	1096 x 390 x 297
	OUTDOOR(W/O PIPE)	mm	890 x 385 x 650	890 x 385 x 650	845 x 340 x 615	890 x 385 x 650	890 x 385 x 650	890 x 385 x 650	890 x 385 x 650
GROSS WEIGHT	INDOOR	kg	12.5	16	10	12	12.5	16	16
	OUTDOOR(W/I PIPE)	kg	28	32	24	26	28	32.5	32
FIN			Gold Fin	Gold Fin	Gold Fin	Gold Fin	Gold Fin	Gold Fin	Gold Fin
SWING			2 Way	2 Way	2 Way	2 Way	2 Way	2 Way	2 Way
REFRIGERANT			R-32	R-32	R-32	R-32	R-32	R-32	R-32
AUTO RESTART / TURBO MODE			Yes	Yes	Yes	Yes	Yes	Yes	Yes
SELF CLEANING / ECO MODE			Yes	Yes	Yes	Yes	Yes	Yes	Yes
REFRIGERANT LEAKAGE DETECTION			Yes	Yes	Yes	Yes	Yes	Yes	Yes
CONVERTIBLE			7 in 1	7 in 1	5 in 1	5 in 1	5 in 1	5 in 1	5 in 1
SLEEP MODE			Yes	Yes	Yes	Yes	Yes	Yes	Yes
EVA COIL U BEND NANO TEK COATING			Yes	Yes	Yes	Yes	Yes	Yes	Yes
COOLING			55 degree cooling	55 degree cooling	55 degree cooling	55 degree cooling	55 degree cooling	55 degree cooling	55 degree cooling
CONDENSER			Copper	Copper	Copper	Copper	Copper	Copper	Copper

TECHNICAL SPECIFICATIONS 2026

SERIES			涼風 RYOHU (PURE COOL AIR) FIXED SPEED AC		涼風 RYOHU (PURE COOL AIR) INVERTER AC			
Model Name			AF-WA18F3X-SCN	AF-WA22F2X-SCN	AF-TA18V3X-HCP	AF-TA18V5X-HCP	AF-TA18V3X-GCP	AF-TA18V5X-GCP
Facia								
Tonnage		As per BEE 2026	1.41	1.70	1.45	1.45	1.45	1.45
		BEE RATING						
Performance	Cooling Capacity	WATT	4950	5975	5100	5100	5100	5100
	ISEER		3.37	3.18	3.49	3.81	3.49	3.81
	Star		3	2	3	5	3	5
	Power Consumption	WATT	1137.94	1454.55	1130.81	1037.03	1130.81	1037.03
	Power Supply		230V/50Hz/1Ph	230V/50Hz/1Ph	230V/50Hz/1Ph	230V/50Hz/1Ph	230V/50Hz/1Ph	230V/50Hz/1Ph
Compressor	Make		GMCC	GMCC	GMCC	GMCC	GMCC	GMCC
Outdoor Motor			PICL-11189	PICL-10060	57W	57W	57W	57W
Evaporator			3R/7mm/27HP	3R/7mm/27HP	3R/7mm/18HP	3R/7mm/23HP	3R/7mm/18HP	3R/7mm/23HP
Indoor Noise	(Low Speed)	dBA	53	57	46	46	46	46
EEV/Capi.			Capillary	Capillary	Capillary	Capillary	Capillary	Capillary
Condenser			2R 5mm , 20HP , 704mm	2R 7mm , 18HP , 883mm	2R 5mm , 20HP , 704mm	2R 5mm , 24HP , 704mm	2R 5mm , 20HP , 704mm	2R 5mm , 24HP , 704mm
Outdoor Motor	Model		Common	Common	BLDC	BLDC	BLDC	BLDC
Outdoor Noise Level dB		dBA	60	62	58	58	58	58
Refrigerant			R32	R32	R32	R32	R32	R32
Air Flow (Full Capacity/Half capacity)		m3/min	12.82	15.6	13.77/16.97	10.69/13.04	13.77/16.97	10.69/13.04
Plasma Cluster Ions (PCI)			NO	NO	NO	NO	YES	YES
	Convertible		NO	NO	4 in 1 (40%, 60%, 80%, 100%)	4 in 1 (40%, 60%, 80%, 100%)	4 in 1 (40%, 60%, 80%, 100%)	4 in 1 (40%, 60%, 80%, 100%)
	Swing		2 Way	2 Way	4 Way	4 Way	4 Way	4 Way
	Works at Ambient Temp Upto		52 Degree	52 Degree	52 Degree	52 Degree	52 Degree	52 Degree
IDU Net Dimension	(W * D * H)	mm	660x660x430	660x750x430	660x750x430	660x750x430	660x750x430	660x750x430
Net Weight		KG	53	58	41	43	41	43
Package Dimension	(W * D * H)	mm	745x745x535	745x810x535	745x745x575	745x745x575	745x745x575	745x745x575
Gross Weight		KG	58	63	46	48	46	48
Warranty	Product	Months	12	12	12	12	12	12
Warranty	Compressor	Months	60	60	120	120	120	120

SHARP ECO VISION 2050

The international community has recognized the urgent need to address increasingly serious environmental problems. To this end, Sharp formulated SHARP Eco Vision 2050, a long-term environmental vision. Sharp is working toward realizing a sustainable global environment by pursuing long-term goals set in three fields of action with 2050 as the target year: Safety & Security, Climate change, and Resource Recycling.



CLIMATE CHANGE

It is precisely because Sharp makes products that use electricity that we work to reduce energy consumption, produce clean energy, and contribute to the realization of a low-carbon society.



RESOURCE RECYCLING

We strive to make effective use of the world's finite resources and help build a circular economy in which plastics and other materials are reused.



SAFETY AND SECURITY

Sharp is focused on building safe, reliable, and durable technology. We work to enhance protection, prevent hazards, and contribute to a secure and sustainable future.



R32 GAS

A next-generation refrigerant that results in zero Ozone depletion and protects environmental damage.

SPREADING SMILES THROUGH INNOVATION

OUR PRESENCE IN INDIA

- Head Office
- Branches
- Representative Office



HEAD OFFICE - NOIDA

3rd Floor, Add India Centre,

0120-335-8888
contact@sharp-oa.com

REGISTERED OFFICE – NEW DELHI

First Floor, Plot No 51, Okhla
Industrial Area, Phase - 3, Near Modi

INFOGRAPHIC
INDIA

AREA
3.287 million km²

Sharp AC User Manual

A concise operating guide for the AC models shown in the brochure.

Before first use

Confirm the indoor and outdoor units are installed by a qualified technician, check the model/serial number, and ensure power supply matches the rating plate. The brochure indicates 230V, 50Hz, 1Ph for the featured models and mentions stabilizer-free operation on selected units.

Basic operation

Use the remote or touch panel to select Cool, Fan, Dry, Turbo, Eco, Sleep, and Swing options if available on your model. The brochure highlights 7-in-1 convertible cooling on several split ACs, plus 4-way swing or auto swing on selected variants.

Everyday tips

Close doors and windows during cooling, keep filters clean, and avoid blocking airflow. The brochure also highlights dust filtration, quick freeze mode, auto restart after power failure, and self-diagnosis for easier maintenance.

Care and maintenance

Clean filters regularly, keep outdoor vents unobstructed, and arrange annual servicing before peak summer use. If the unit shows an error, use the self-diagnosis result and contact an authorized service provider with the model number.

Safety

Do not open electrical panels, do not bypass fuses, and avoid operating the AC with visible damage, burning smell, or refrigerant leakage. The brochure lists safety protections such as thermal fuse, non-flammable terminal shielding, and fire/voltage/surge/corrosion/squall protection layers on the product family.

Support reference

Sharp’s air-conditioner manuals page provides operation, installation, maintenance, and error-code resources for AC series; use the exact model family when looking up the right file.

Sharp AC Warranty, Return Policy & Service Centers

Compiled from the attached AC document and official Sharp policy/manual pages.

Product context

The attached Sharp AC document lists Reiryou and Seiryo split AC models, window AC models, and warranty highlights including 5-year comprehensive warranty and 10-year compressor warranty for the product family shown in the brochure.

Warranty

The brochure states a 5-year comprehensive warranty and a 10-year compressor warranty for the featured AC line. Final warranty eligibility can vary by model, so the serial/model label and invoice should be checked at purchase and installation.

Return and replacement policy

Sharp's store policy says products are eligible for replacement if they are damaged, defective, or not as described. Buyers must notify the company within 7 days of receiving the product, keep all packaging/accessories/documentation, and return the product within 14 days of receiving the return label.

The policy also says misuse, unauthorized modifications, accidents, and custom/personalized products are excluded unless defective or not as described. If replacement is not possible, a refund may be offered to the original payment method, usually within 5-7 business days after processing.

Service centers in Bengaluru

Public web results show Sharp support presence in Bengaluru, including the Sharp India head office in Vasanth Nagar and private service listings that advertise Sharp AC support across Bangalore neighborhoods. For a clean handover document, list the official company contact as the head office and note that local service availability should be confirmed at booking time.

Contact	Details
Head office	Sharp India Ltd, 8th Main Road, 2nd Cross, Vasanth Nagar, Bangalore - 560001.
Company website	store.sharpappliances.in
Customer service	contact@sharp-oa.com
Bengaluru support	Search results show multiple Sharp AC service listings in Bangalore; verify before dispatch.

Note

This document is a buyer-facing summary, not a legal policy. The official store policy and service coordination should be confirmed against the invoice and model number.