


DRIVE SHAFT

DESCRIPTION


In the IS200, the drive shaft use the tripod type CVJ (Constant Velocity Universal Joint) on the differential side, and Rzeppa type CVJ on the wheel side.

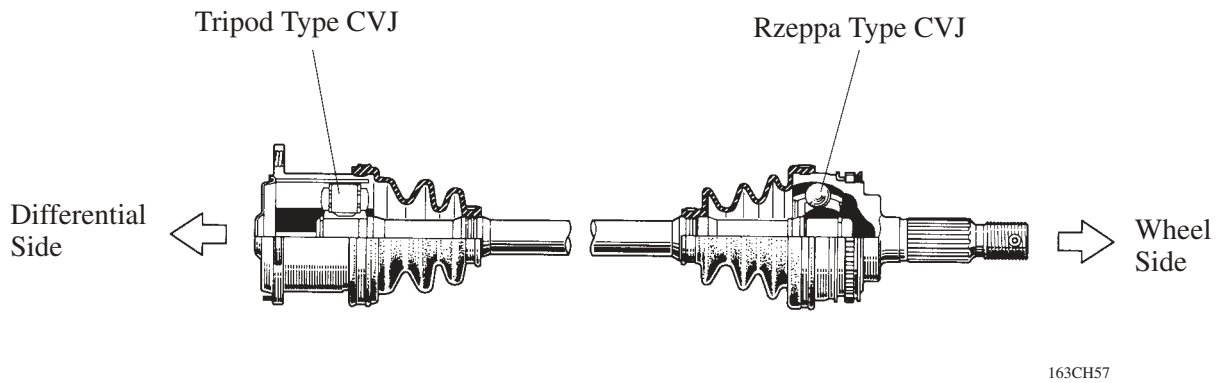


AXLES

DESCRIPTION

The front and rear axles use a double-row angular ball bearing which offers low rolling resistance.

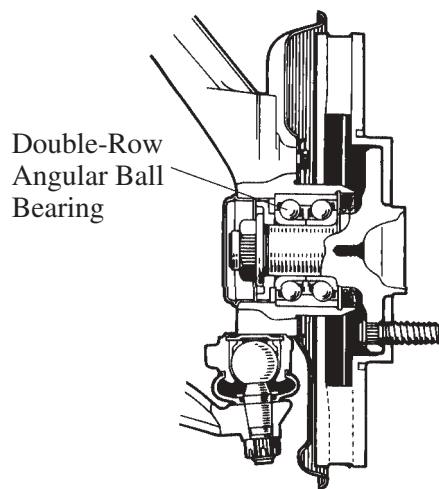

Front Axle

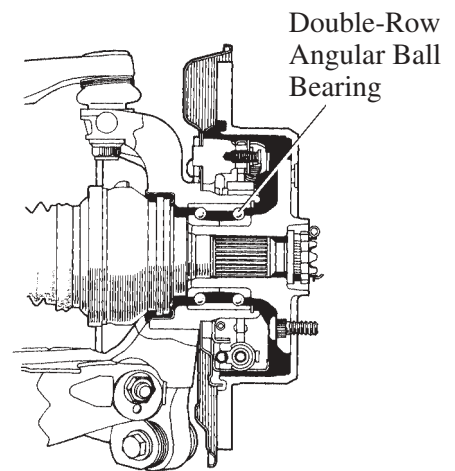

Rear Axle