


BRAKES

DESCRIPTION

On the IS200, the front brakes use ventilated discs and the rear brakes use solid discs. The ABS and TRC are standard equipment on all models.

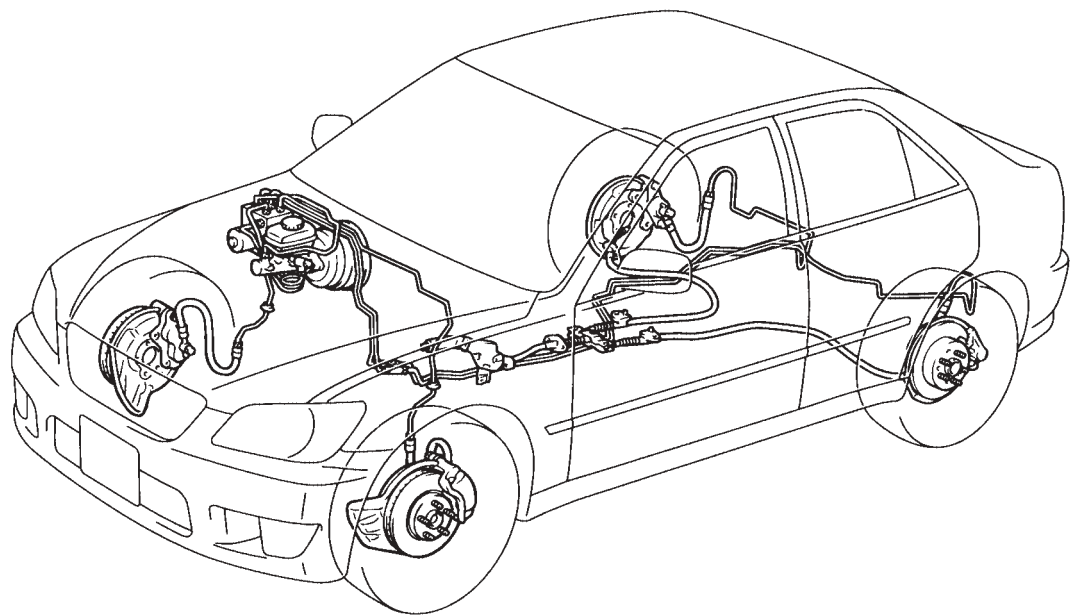

RHD Model

163CH41

Specifications

Model		European Model	Other Model
Item			
Master Cylinder	Type	Tandem	←
	Diameter mm (in.)	25.4 (1.00)	26.99 (1.06)
Brake Booster	Type	Tandem	←
	Size in.	7.5” + 7.5”	7” + 8”
Front Brake	Type	Ventilated Disc	←
	Caliper Type	PE45T	←
	Wheel Cylinder Dia. mm (in.)	44.45 (1.75) x 2	←
	Rotor Size (D x T)* mm (in.)	296 (11.65) x 32 (1.26)	←
Rear Brake	Type	Solid Disc	←
	Caliper Type	FA40R	←
	Wheel Cylinder Dia. mm (in.)	40.45	←
	Rotor Size (D x T)* mm (in.)	307 (12.09) x 12 (0.47)	←
Parking Brake	Type	Duo-Servo	←
	Size mm (in.)	190 (7.48)	←
	Lever Type	Center Lever	←
ABS (Anti-Lock Brake System) & TRC (Traction Control)		STD	←

\*D: Outer Diameter T: Thickness