

UPPER VALVE BODY


AT0Y4-01

LOCATION

1. SPRING

HINT:


During reassembly, please refer to the spring specifications below to help you differentiate among the different springs.

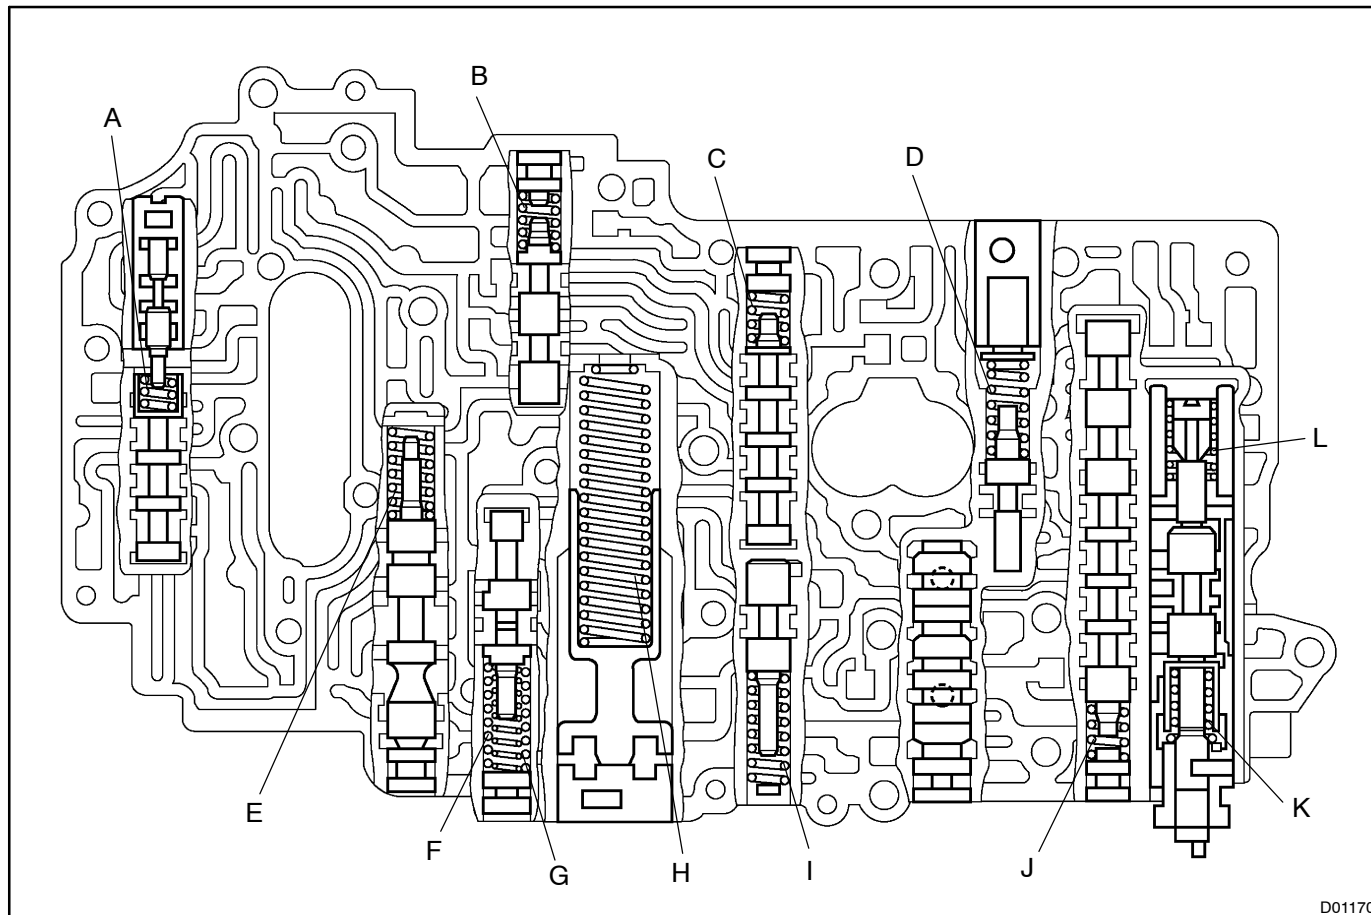

D01170


Mark	Name (Color)	Free length / Outer diameter mm (in.)	Total No. of coils
A	Lock-up Relay Valve (Red)	23.42 (0.922) / 5.86 (0.231)	12.25
B	C-0 Exhaust Valve (Orange)	24.25 (0.955) / 8.70 (0.343)	7.58
C	4-5 Shift Valve (Red)	25.50 (1.004) / 9.73 (0.383)	7.75
D	Coast Brake Control Valve (Green)	26.92 (1.060) / 8.70 (0.343)	10.53
E	Secondary Regulator Valve (Red)	34.48 (1.357) / 9.22 (0.363)	13.5
F	C-1 Orifice Control Valve (White)	37.13 (1.461) / 11.14 (0.439)	11.25
G	C-1 Orifice Control Valve (None)	21.50 (0.846) / 7.76 (0.306)	11.5
H	C-1 Accumulator Valve (Yellow)	78.16 (3.077) / 17.50 (0.689)	15.9
I	Solenoid Modulator Valve (Light blue)	35.99 (1.417) / 8.30 (0.327)	13.8
J	2-3 Shift Valve (Red)	25.50 (1.004) / 9.73 (0.383)	7.75
K	B-3 Control Valve (Yellow)	26.05 (1.026) / 7.20 (0.283)	11.83
L	B-3 Control Valve (Pink)	19.79 (0.779) / 7.70 (0.303)	8.51

2. RETAINER

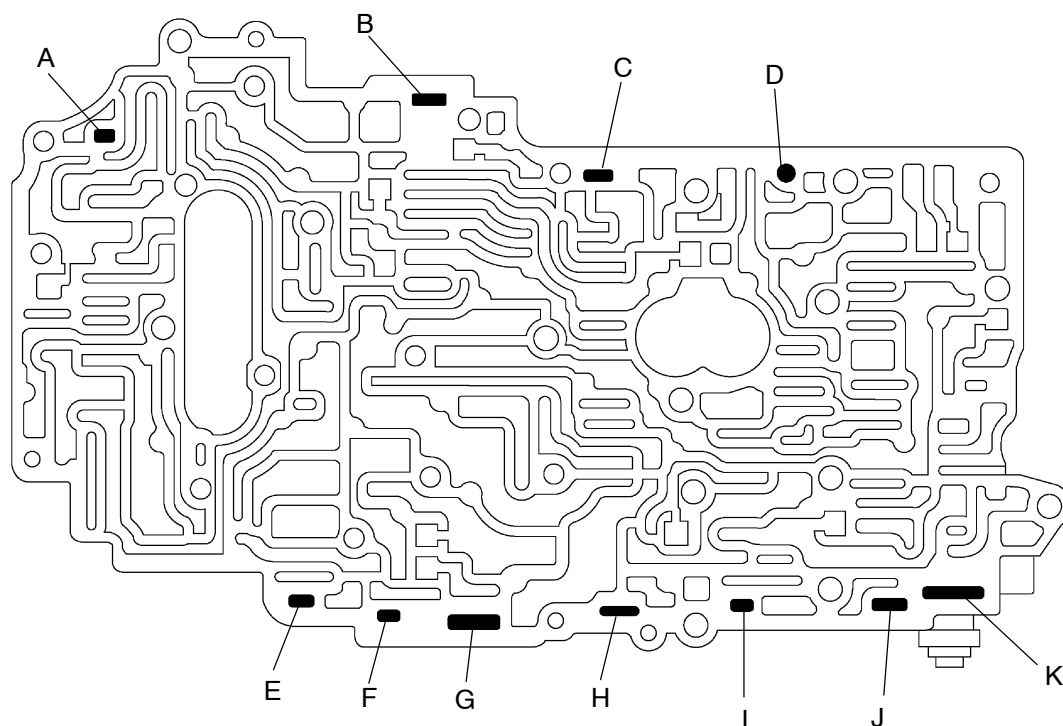

D01173

Mark	Retainer	Height / Width / Thickness mm (in.)
A	Lock-up Relay Valve	- / - / -
B	C-0 Exhaust Valve	8.5 (0.335) / 5.0 (0.197) / 3.2 (0.126)
C	4-5 Shift Valve	10.0 (0.394) / 5.0 (0.197) / 3.2 (0.126)
D	Coast Brake Control Valve	15.0 (0.591) / \varnothing 5.0 (\varnothing 0.197) / \varnothing 5.0 (\varnothing 0.197)
E	Secondary Regulator Valve	10.0 (0.394) / 5.0 (0.197) / 3.2 (0.126)
F	C-1 Orifice Control Valve	8.5 (0.335) / 5.0 (0.197) / 3.2 (0.126)
G	C-1 Accumulator Valve	36.5 (1.437) / - / 3.2 (0.126)
H	Solenoid Modulator Valve	21.0 (0.827) / - / 3.2 (0.126)
I	Check Valve	10.0 (0.394) / 5.0 (0.197) / 3.2 (0.126)
J	2-3 Shift Valve	8.0 (0.315) / 8.0 (0.315) / 3.2 (0.126)
K	B-3 Control Valve	16.5 (0.650) / 6.0 (0.236) / 3.2 (0.126)

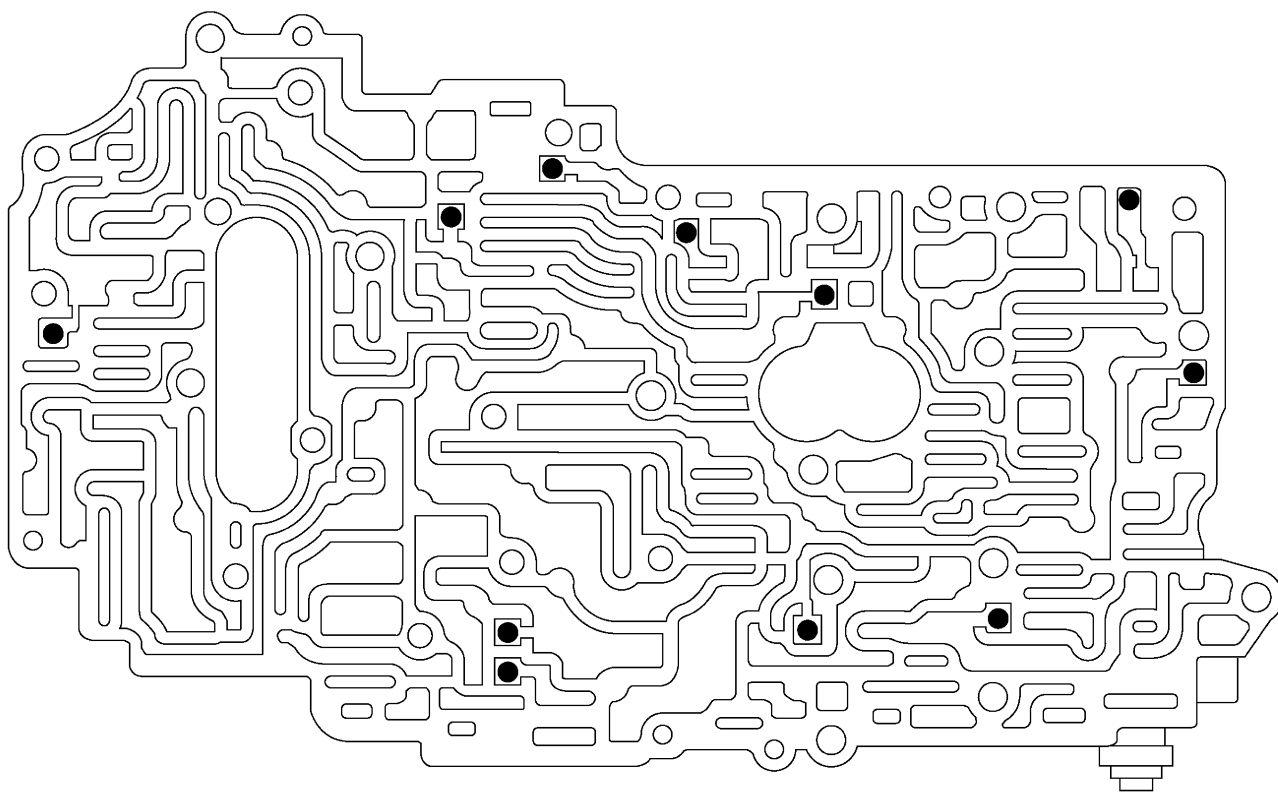3. CHECK BALL

N

D09450