
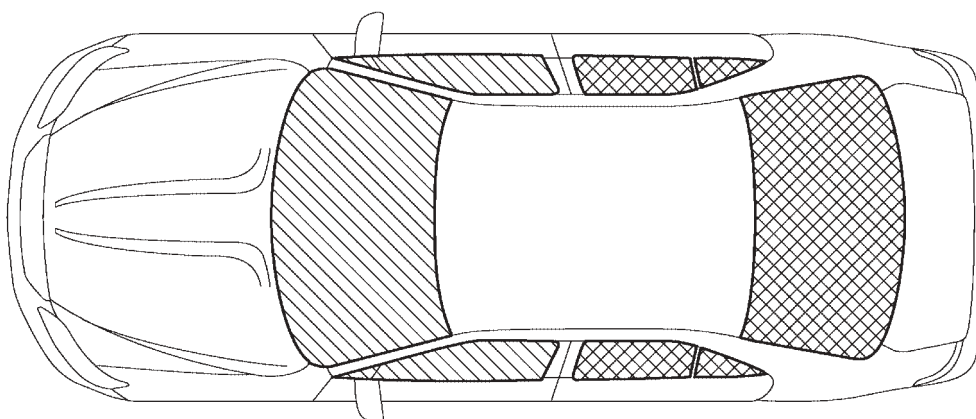


# MAIN FITTINGS

## Exterior

### ◆ Window Glass


- All windows are made of UV reduction glass, and they are provided as standard equipment on all models to reduce the entry of sunlight and ultraviolet light into the cabin. As a result, a comfortable interior has been realized.
- Privacy glass for the rear door windows and the back window is optional equipment on all models. This glass ensures privacy of the rear seat area and achieves a taut, sporty image.

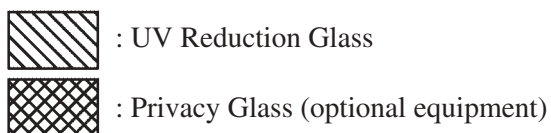

163MO11

## ◆ Outside Rearview Mirror


- Wide outside rearview mirrors with a gradually changing curvature at the end of the mirror are provided as standard equipment on all models except for those for Australia and New Zealand. These mirrors provide a greater field of vision diagonally rearward of the driver's and front passenger's seat to improve the driver's visibility.
- The rain-clearing mirrors with their surfaces coated with gradual layers of titanium-silica are standard equipment on all models. The hydrophilic effect of the mirrors improve visibility in the rain. Also, the photocatalyst function of titanium help break down the organic matter that come in contact with the mirror to ensure the mirror's hydrophilic effect.

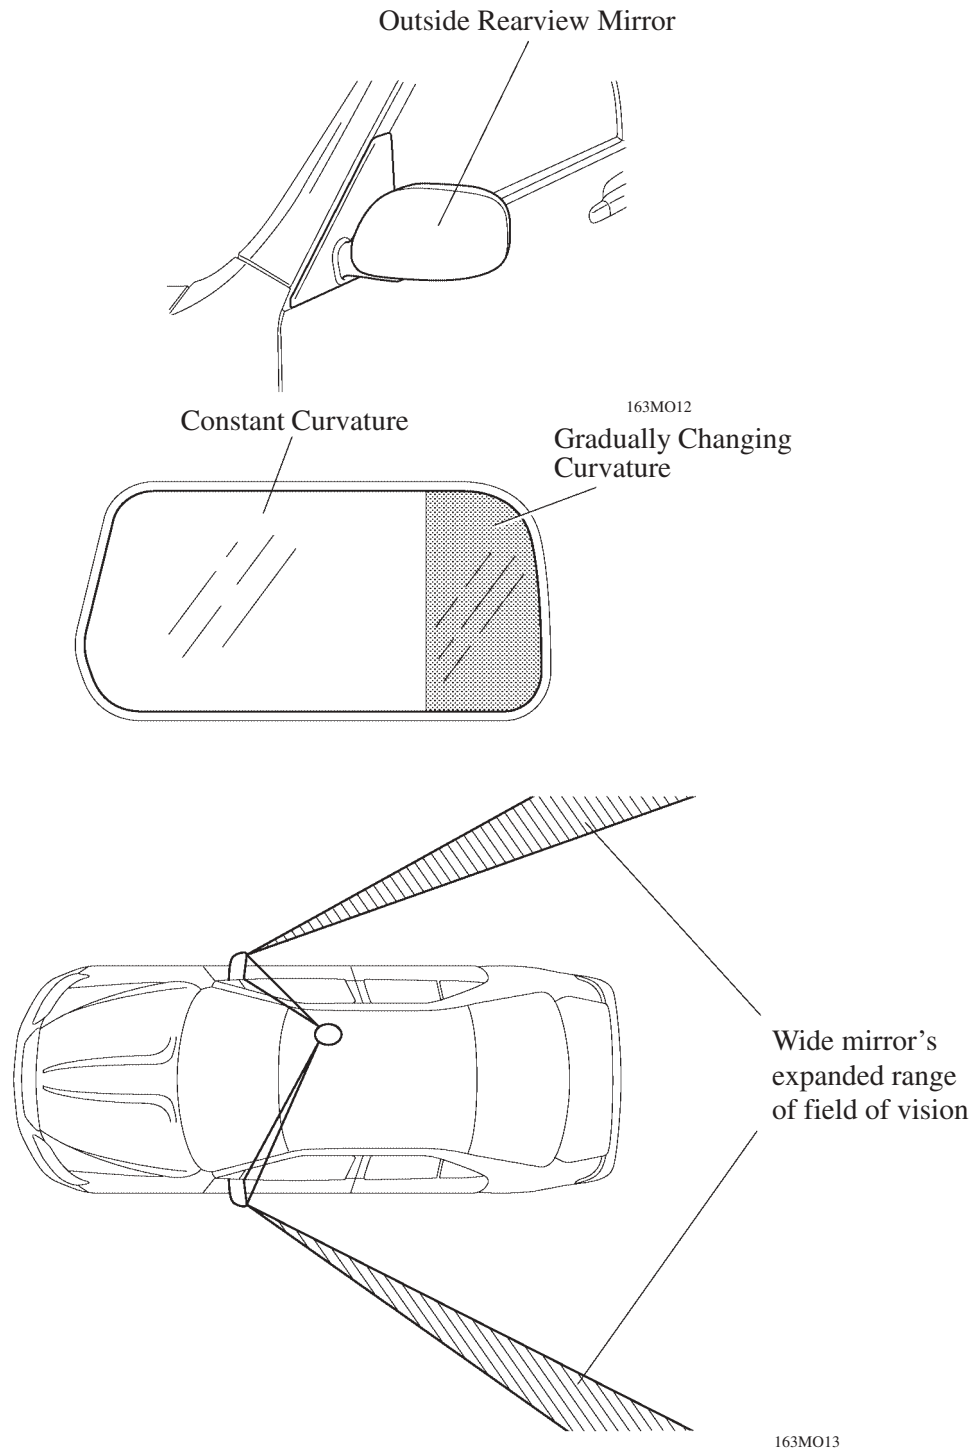


## ◆ Disc Wheels

All models are equipped with 17-inch aluminum disc wheels as standard equipment. Also, 16-inch aluminum wheels are available as optional equipment on all models.

- The 17-inch aluminum wheel is designed with a precision look and a sports-like style that brings out the wheel's large diameter.  
Sticking type balance weights are used so as not to spoil the innovative looks of the radius rim.
- The 16-inch aluminum wheel expresses elegance and sportiness through its unique graphics and three-dimensional form.

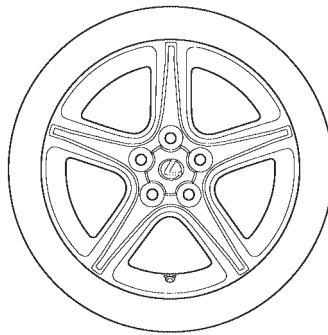

**17-Inch Aluminum Wheel**

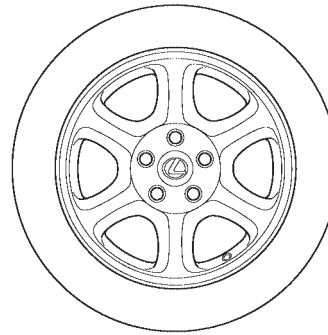

**16-Inch Aluminum Wheel (optional Equipment)**

163MO14

## ◆ Moon Roof

A tilt & slide type power moon roof is optional equipment on all models.


- The plastic molding along the periphery of the sliding roof is made flush with the glass surface for improved appearance.

### **Models Other than Australia:**


- One-touch open and close function is provided for the opening and closing operations of the sliding roof.
- A jam protection mechanism is provided as standard equipment on all models to ensure safety during auto close and tilt down operations.

### **Models for Australia:**

- A one-touch open function is provided for the opening operation of the sliding roof.
- An automatic function to momentarily stop the moon roof during its closure is provided as a safety measure.

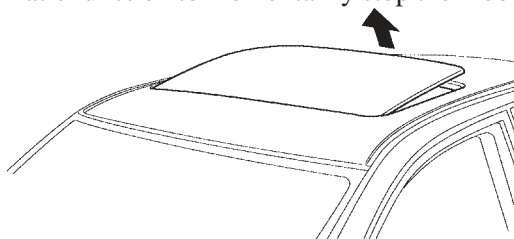


**Tilt**

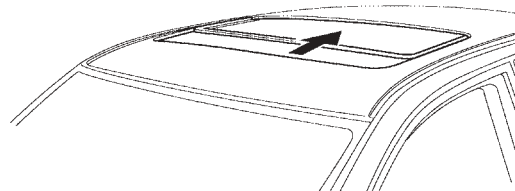

**Slide**

163MO15

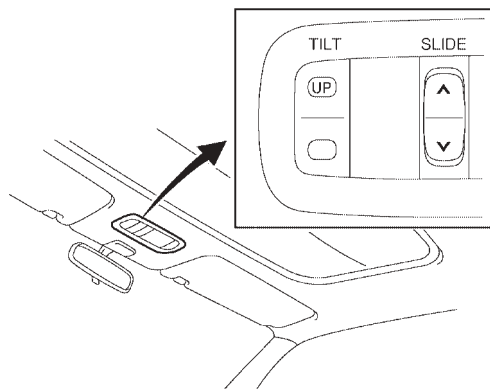

**Tilt & Slide Switch**

163MO16